

PRODUCT CATALOGUE 2025

AIR CONDITIONERS LINEUP

AIRSTAGE

OUR MESSAGE

SOLUTIONS

AIR TO WATER

SPLIT

MULTI-SPLIT

VRF

VENTILATION

CONTROL SYSTEM
& OPTIONAL PARTS

SUPPORT

FUJITSU GENERAL LIMITED



The FUJITSU GENERAL Way

Our mission

Living together for our future

Through innovation and technology, we deliver a brighter future with peace of mind to our customers and societies around the world.

Our philosophy

Act spontaneously

We embrace new challenges by investing in ourselves for personal growth, and through continuous creativity with a spontaneous attitude.

Develop our team

We respect and value our people, and optimize their abilities through fostering culture and diversity, and utilizing a collaborative effort focused on communication.

Value integrity

To achieve our goals, we always act with integrity and shared ethics.

CONTENTS

004 OUR MESSAGE

- 006 Sustainable
- 008 Cleanliness
- 010 Future
- 012 Comfort
- 014 Control
- 016 Design
- 018 History
- 020 Worldwide locations
- 022 Global business activities
- 024 Project references
- 026 Global development & Production bases
- 028 High-quality development & Production Facilities
- 030 2024 New Products

032 SOLUTIONS

- 034 For Light Commercial Use
- 042 For Commercial Use
- 044 For Apartments & Houses


PRODUCT LINEUP

AIR TO WATER
SPLIT & MULTI-SPLIT
VRF
VENTILATION
CONTROL SYSTEM
& OPTIONAL PARTS

SUPPORT

- Sp-002 VRF Support
- Sp-004 HVAC System design Support Tool
- Sp-006 Quick Service & Maintenance
- Sp-008 AIRSTAGE Service Monitor Tool
- Sp-010 Service Tool
- Sp-011 Web monitoring tool

OUR MESSAGE

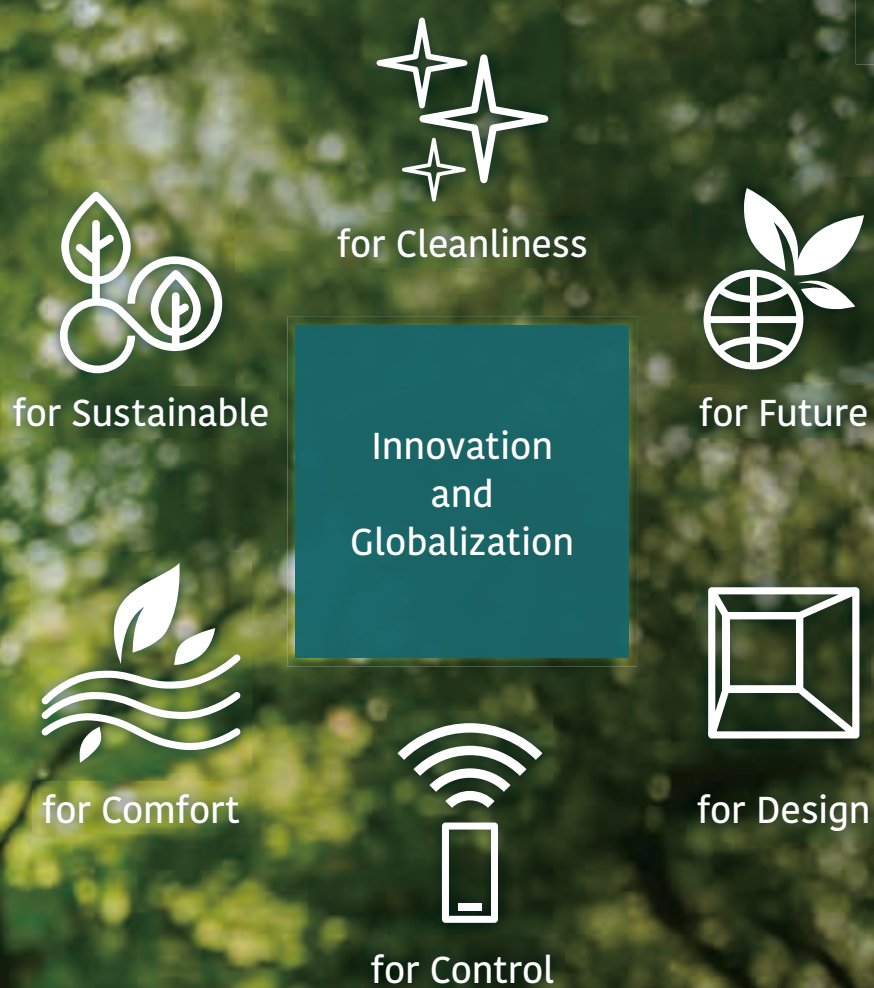

We create comfortable lives for people around the world with "made-in-Japan quality" and innovative manufacturing.

-  History
-  Worldwide locations
-  Global business activities
-  Project references
-  Global development & Production bases
-  High-quality development & Production facilities




Sustainable

Sustainable management

We see the challenge of expanding our business by contributing to the realization of a sustainable society as a core element of our growth strategy, and we are working on “sustainable management,” based on the three pillars of “harmonious coexistence with our planet,” “social contribution,” and “care for employees.”

Basic policy on sustainable management

The sustainable development goals (SDGs) of the UN will drive business creation in the coming years. The key principle of the SDGs, “Leave no one behind,” is synonymous with our own corporate philosophy of “Living together for our future.” The promotion of sustainable management is carried out from a medium- to long-term perspective, with a promise to shape a sustainable society for the children and society of the future. We will pursue business growth by accelerating this transformation.

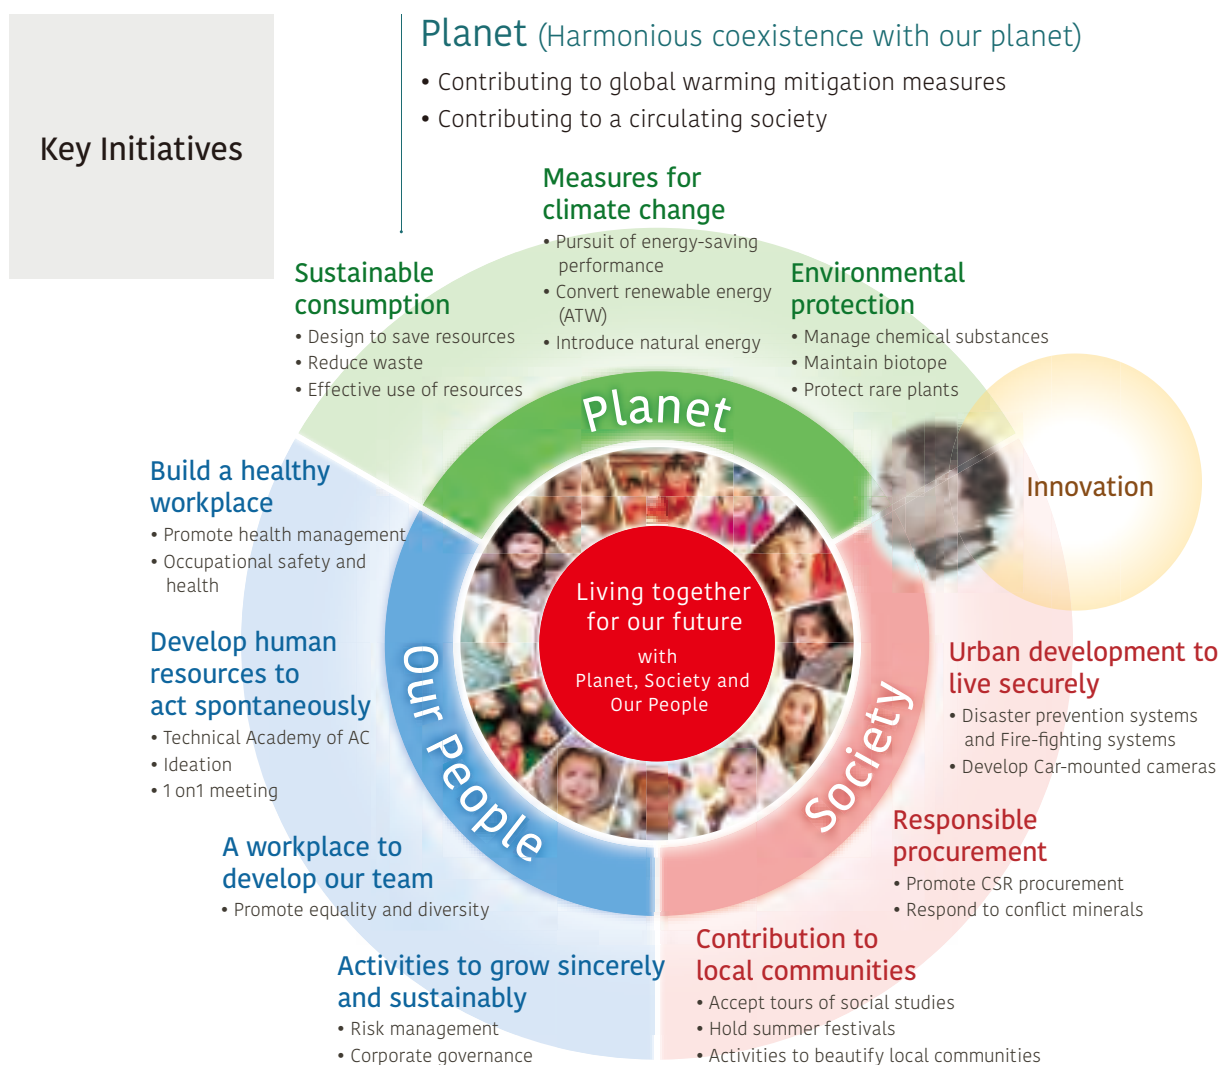

Our People (Care for employees)

- Strategic implementation of health and productivity management
- Creating flexible work styles under COVID-19
- Enhancing human resource development

Society (Social contribution)

Fostering innovation to address social issues (Providing a healthy, clean, and safe society and environment)

Cleanliness

Think about air quality

Fresh air is essential for comfortable air conditioning. Fujitsu General offers a wide range of air conditioning products with air purification functions, such as ventilation systems equipped with high-performance filters and heat exchangers.




Collecting dust particles to clean the air



Silver Ion Filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.

Notice: Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.

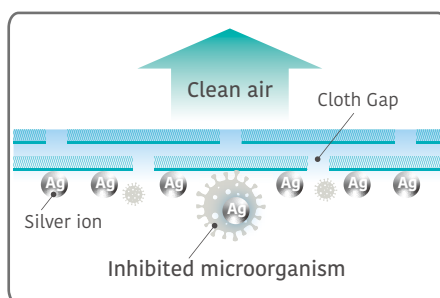


Different filters are used on each side



Ion Deodorization Filter

Deodorizes the air by decomposing absorbed odors using the oxidizing and odor-reducing effects of ions generated by ultra-fine particle ceramic.

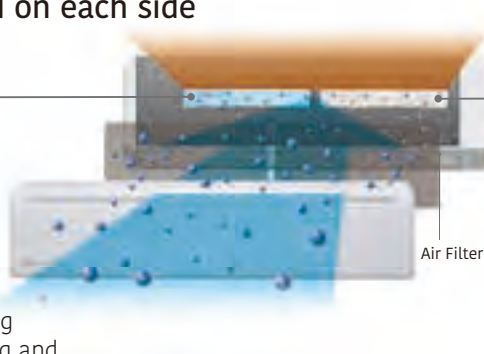


Apple-catechin Filter

The Apple-catechin filter uses static electricity to remove fine particles and dust from the air.

Ventilation with adequate airflow with reduced temperature changes

Heat Exchange Ventilation

When a room is cooled or heated, the exhausted cooling or heating energy is recovered by heat exchange ventilation.

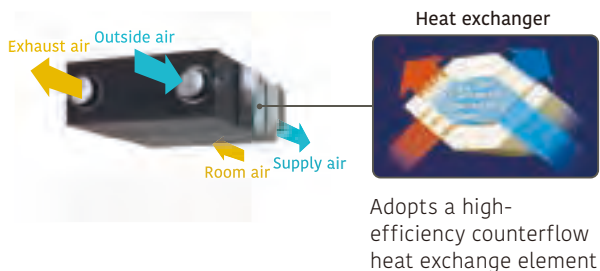




The green refrigerant

Throughout our research and development process, we are constantly striving to create products that we can be proud of in the future. The technologies we have cultivated through these efforts are incorporated into our environmentally friendly products, and are recognized in the European market, which has extremely strict environmental regulations.

R32 refrigerant with reduced global warming potential


- High environmental properties
- High performance
- Economically efficient

*1 GWP (Global Warming Potential): a measurement that indicates how much other greenhouse gases are capable of warming the Earth based on carbon dioxide. This is the integrated value of radiant energy given to the Earth (i.e., the estimated impact on global warming) expressed as a ratio to CO₂.

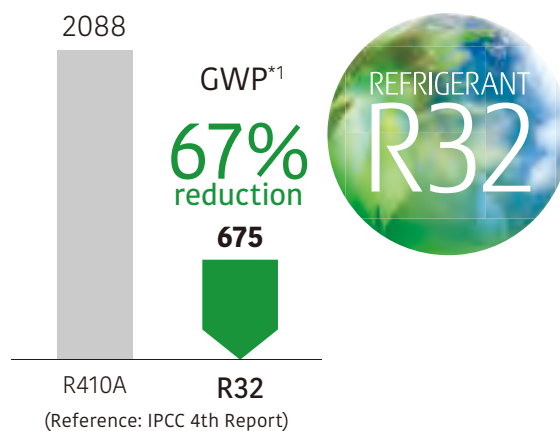


Low GWP to a wide range of projects

We are continuously working to develop products that use R32 refrigerant and have R32 products in all product categories in our lineup (Split, Multi-Split, VRF, and ATW). This allows us to realize environmentally and regulatory friendly system designs for a wide range of projects from residential to light commercial.

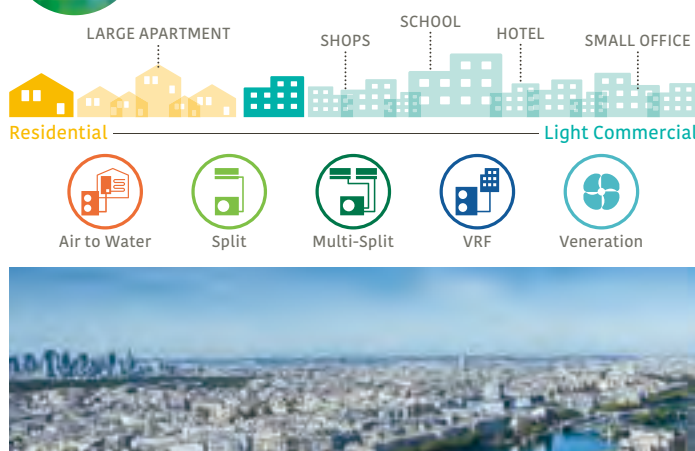

New energy labelling requirement 626/2011/EU

Our air conditioners have reached the **"Class A+++"** ranking, the highest energy efficiency level that is now shown on energy labels in Europe.

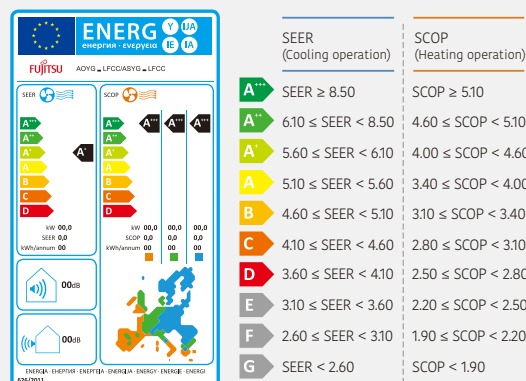

Fujitsu General's Environmental Vision

Medium-Term Environmental Plan: Target and Measure

	Target	Measure
Reduction of Our Own Environmental Impact Achieve	Achieve carbon neutrality by FY2025 [Old Target] Greenhouse gas emissions from our Group's business activities: Completely eliminate by FY2030	1. Renewable energy conversion: Existing plants (by FY2023) 2. Renewable energy conversion: All Group companies (by FY2025) → Achieved 1 and 2 ahead of schedule (April 2022) 3. Shift to use of renewable energy for all other energy used (by FY2025)
Through Our Supply Network	Reduction of 30% for total greenhouse gas emissions through our supply Network by FY2035 (vs. FY2018)	• Promotion of green electricity use by our suppliers • Reduction of material consumption and product weight
For our Customers and Society	Reduce greenhouse gas emissions from the use of our products. Reduction of 30% by FY2030 (vs. FY2013)	• Replace constant-speed A/C with inverter A/C (India and Middle East) • Enhance energy efficiency

Comfort

Comfortable airflow design

Pursuing the potential of air conditioners and true comfort, Fujitsu General has developed and commercialized numerous world-first technologies, and these concepts are reflected in the design of our products.

Cassette type 3D flow Series

3 individually controlled air outlet ports

The Comfortable airflow setting enables the right and left air outlet ports as well as the wide center port to work together to provide a comfortable room environment.

*1: Announced 2018. In room air conditioner for the home (Our company's investigation)



Cassette type One-way flow Series

Wide airflow range created by triangle design and large flap

A large flap with a wide range of movements, equipped with louvers arranged triangularly, sends air into every corner of the room.

Cassette type Circular flow Series

Unique circular flow design

This Series realizes a Circular Flow to blow a large airflow in a 360° direction by using a high-performance DC fan motor, turbo fan, and a unique seamless airflow louver design.



Mini duct



Slim duct

Auto Louver Grille Kit for Mini duct and Slim duct

Flexible Control

The optional clean-looking flat Auto Louver Grille Kit blends into any interior and provides a comfortable airflow.





Control

Operation from anywhere

Using the Internet of Things (IoT), Fujitsu General is actively providing services that allow users to control their air conditioners from their smartphones. We are also expanding our open co-creation activities with external partners to deepen the development of new functions and services using IoT and artificial intelligence (AI) to develop safe and convenient air conditioners.



User-friendly screen display enables easy operation.

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.



Software application for WLAN Adapter

"AIRSTAGE Mobile" is a software application that allows users to control Fujitsu General air conditioners from anywhere with a mobile device while out or on the move.



**AIRSTAGE
Mobile**

Download Free



Compact wired remote controller

Large screen and simple display

- Large screen, yet compact in size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.



Central remote controller for VRF system

The central remote controller uses a touch panel screen to display multiple menus on the top screen. Just touch the menu you want to operate, and the necessary window will pop up, and allow intuitive operation.

Remote monitoring and operation

The central remote controller enables monitoring and control of a tenant's air conditioner anytime, anywhere.



Design

Harmonizes with the installation space

Fujitsu General offers a wide range of products for the European market, including models with unique textural designs, award-winning models that integrate with room interiors, and Cassette type models with different designs that match office spaces. We also have a lineup of models with elegant designs, such as the Ceiling type models with its beautiful curved surface.





Light Elegant Design

New Ceiling type design

The light, elegant and three-dimensional expression achieved by the curved surface gives a sense of comfort and well-being.



reddot winner 2020



KM
Series

Warm & gentle color option

New Wall-mounted type design

Both white and soft black color are relatively gentle tones and no strong contrast, each color harmonize with the environment and create a warm atmosphere.

Sleek and Stylish Design

New designed wired remote controller

When not in use, the controller is a part of the interior decor. This is achieved by using mirrors, glass, and clear panel, and it appears to be on with the wall.



reddot winner 2024



Stylish design

New outdoor unit for Air to Water

A design that offers a sophisticated style that is quiet and blends in with the outdoor landscape.





History Yaou Shoten Ltd. established in 1936

Overseas air conditioning business since 1971

Starts air conditioning business in Japan in 1960

1971 Air conditioner exports to the Middle East.

1977 “Super Power, Super Quiet” Series released

1982 Window type 3 Super Series released

AL/AX Series



1985 Large wall-mounted type and multi-split air conditioner released.



***1,*2 1991** World's first air conditioner equipped with lambda heat exchanger

1994 World's first air conditioner with power diffuser

2001 AIRSTAGE series released VRF air conditioners for large buildings

AIRSTAGE™



***3 2002** Air conditioner with the world's first automatic self-cleaning filter system

nocria™



2004 Standalone Compact VRF AIRSTAGE J series released



AIRSTAGE J

2006 VRF Heat Pump type Maximum 42 HP AIRSTAGE V series released

AIRSTAGE V



2009 VRF Heat Pump Modular type Maximum 48 HP AIRSTAGE V-II series released

2009 Air to water system released

WATERSTAGE™



1950 ~

1970 ~

2000 ~

Manufacturing Company Establishment

1955 Head Office established in Kawasaki

1964 Electronic components factory in Ichinoseki



1977 Air conditioner manufacturing company in Hamamatsu (now Hamamatsu business office)

1991 Air conditioner manufacturing company in Thailand

1994 Air conditioner manufacturing company in Shanghai, China

1998 Air conditioner motor manufacturing company in Thailand

2006 VRF air conditioner manufacturing, sale, and service company in China

2007 Air Conditioner Technology Building becomes operational on the premises of the Kawasaki Headquarters. Air conditioner R&D Center in Kawasaki

2009 Compressor Factory begins operation in Thailand



Fujitsu General (UK) Co., Ltd. (UK)



Fujitsu General (Euro) GmbH

Sales & service maintenance company established

1976 North America sales company

1977 Europe sales company (UK)

1978 Australia sales company and Europe sales company (Germany)

1980 Brazil sales company

1997 Asia sales company (Singapore)

1998 Middle East sales company (UAE) and New Zealand sales company

2000 Air conditioner manufacturing and sale technical partnership in India

2002 Taiwan sales company

2006 China sales company

*1: Announced 1991. In room air conditioner for the home (Our company's investigation) *2: Announced 1994. In the category of room air conditioners for the home (Our company's investigation).
*3: Announced 2002. In the category of room air conditioners for the home (Our company's investigation).

For Light commercial use

2011 Compact 2 Fan type VRF AIRSTAGE J-II series released

2014 Compact 1 Fan type VRF AIRSTAGE J-IIS series released

2016 Compact 2 Fan type VRF AIRSTAGE J-III series released

2017-19 Compact VRF AIRSTAGE J-IIIL series for light commercial use released

2020 Compact & lightweight outdoor unit AIRSTAGE J-IVL, J-IV, J-IVS series released



2019

New cassette style released
3D Flow Cassette



For Commercial use

2012 VRF AIRSTAGE VR-II series released

2014-15 VRF AIRSTAGE VR-III series released

2020 Heat Recovery Modular type VRF AIRSTAGE VR-IV series & AIRSTAGE Air handling unit released

2022 Energy-saving operation model VRF V-IV series released



VRF **V-IV**



For Residential use

2011 Hi-spec Design model LT Series & LU Series released

2017 Flagship Wall-mounted type “nocris X” released

2017-19 Added to this lineup recently are the environment-friendly R32 refrigerant models. (Split & Multi-split type)

2022 Harmonizes beautifully design model KE Series released



For Commercial use



VRF **J-VS**

2024-25 New VRF products with R32 refrigerant released



For Sustainable Future

Our VRF systems will change to eco-friendly models with the R32 refrigerant



J series



V series



For Residential use



2024-25 Aesthetic and Compact Design. New Air to Water Monobloc type

2024-25 Warm & gentle color option. New wall mounted model



2010 ~

2025 What's New

2012 Joint venture in Thailand to manufacture compressors



2016 Commercial use air conditioner R&D Center in Thailand

2019 New building constructed at Kawasaki Head Office to strengthen development capabilities



2020 Building IoT - based manufacturing in Thailand



2023 FGAI R&D New Office:

FGAI Research & Development office moved to the new office in New Jersey, USA



2016 THE AIRSTAGE on Broadway in New York



2023 Communication Lounge EURO: New lounge in Dusseldorf, Germany



*4: Announced 2018. In room air conditioner for the commercial (Our company's investigation) *5: Announced 2012. In room air conditioner for the home (Our company's investigation)

Worldwide locations

Under a system of five bases in Europe, the Middle East, Asia and Oceania, North and South America, and Japan, the company promotes Globalization from a worldwide perspective while emphasizing the actual conditions in each region.



JAPAN Head Office



Technology research building (Japan)

• Air conditioner solution center
“THE AIRSTAGE” in Manhattan, New York

• Fujitsu General America, Inc.

• Fujitsu General Do Brasil Ltda.

17 Overseas Sales Companies



Fujitsu General (Taiwan) Co., Ltd.
(Taiwan)



Fujitsu General (Thailand) Co., Ltd.
Bangkok Office (Thailand)



Fujitsu General Electronics
(Suzhou) Co., Ltd.



Fujitsu General South
East Europe S.A. (Greece)



Fujitsu General (Euro) GmbH
(Germany)




Fujitsu General Air Conditioning
(UK) Ltd. (U.K.)



Fujitsu General (Italia) S.p.A
(Italy)



Fujitsu General (India)
Private Ltd. (India)

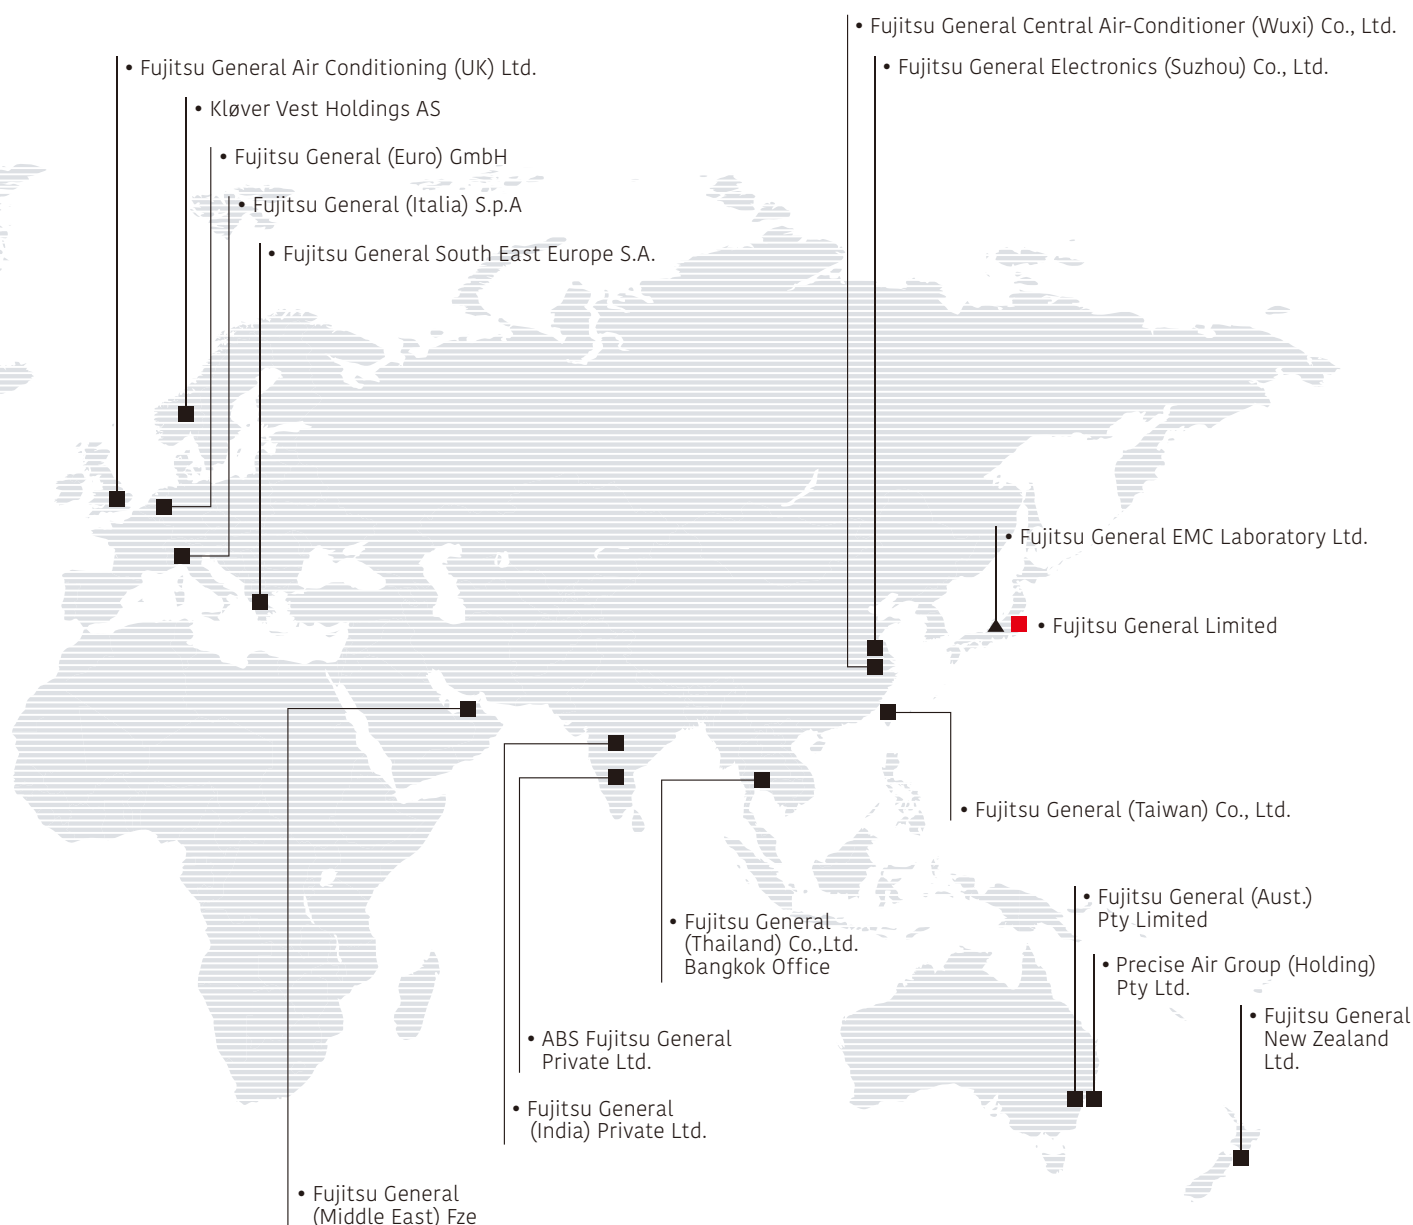

Fujitsu General (Aust.) Pty Ltd.
(Australia)



Precise Air Group (Holding)
Pty Ltd. (Australia)



Fujitsu General New Zealand
Ltd. (New Zealand)



Fujitsu General (Middle East)
Fze (U.A.E.)



FUJITSU GENERAL SOLUTION
CENTER "THE AIRSTAGE" (U.S.A.)



ABS Fujitsu General Private
Ltd. (India)



Fujitsu General Do Brasil
Ltda.(Brasil)



Fujitsu General America,
Inc. (U.S.A.)



Kløver Vest Holdings AS
(Norway)

Global business activities

We have been recognized for our activities in advertising, human resource development and customer service, as well as for our community-based social contribution activities in each region, winning numerous awards and achieving a high level of customer satisfaction.

North and South Americas



AHR Expo



HVAC trade shows in Brazil



Distributor conference in USA



Distributor conference in USA

Middle East




Exhibition



Training in Kuwait



Launch event in Oman

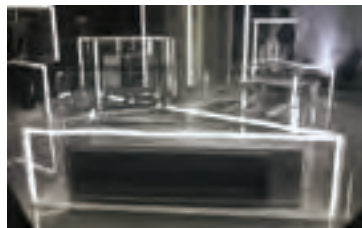

New product seminar in UAE

Europe



HVAC trade show in Germany



Training in Germany

International authoritative design awards



The NEWS Dealer Design Awards



Gold Award (Category: HVAC & PLUMBING) in Reader's Choice Awards



TOP OF MIND 2016 First prize in "MARCA DE EQUIPAMENTO DE AR-CONDICIONADO" category of "CLIMATIZACAO" division




Superbrands is the world's largest independent arbiter of branding.



The iF Product Design Award is given annually by iF International Forum Design GmbH for industrial products from around the world.



The Plus X Award is the world's largest innovation award for technology, sports and lifestyle.

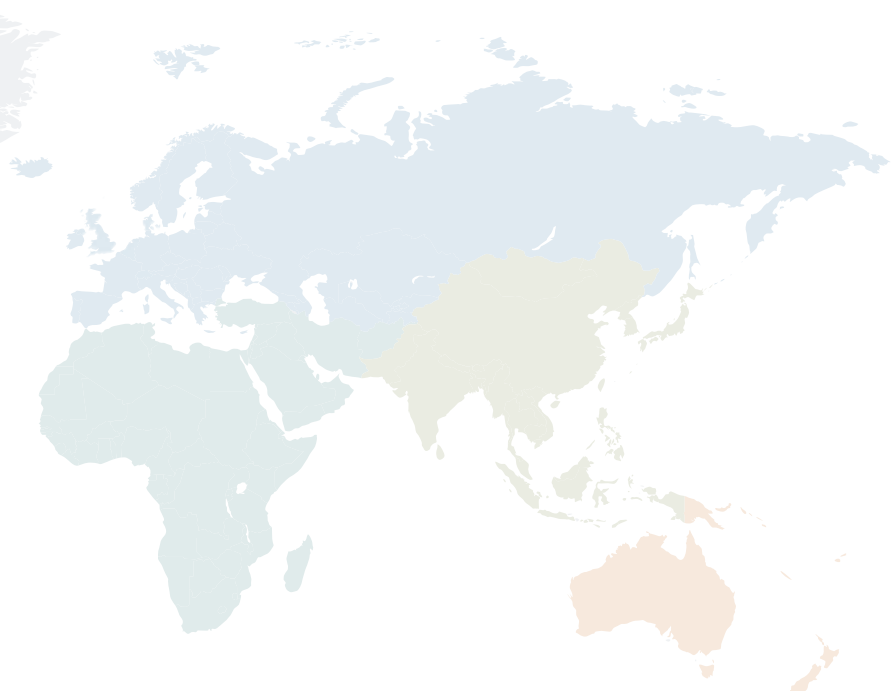

Asia



New product presentation meeting



Exhibition in India



V-CV Launch Event



New product presentation seminar in Singapore



Dealer Convention in Hong Kong

Oceania



HVAC trade show in Germany




Training seminar in Italy



Event in the United Kingdom



HVAC trade show in Australia

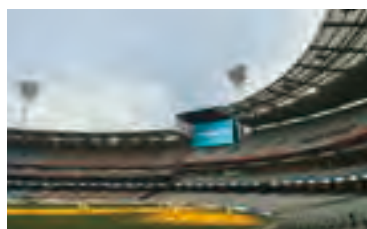

Launch event in New Zealand



Launch event in New Zealand



reddot winner 2024

A product design competition that has been held since 1955. Products that win the award are given the "Red Dot" seal, a sign of international recognition of quality.



One of the famous design award in the world. Designs are judged on innovation and aesthetics, as well as their benefit to users, clients/brands, and society.



ProductReview.com.au's annual awards are selected from products and services that have been well-rated by the ProductReview community.



Voted by Australians as the 'Most Trusted Brand' - Air Conditioning Category 5 Years Running'



China State Construction Engineering Luban Prize



GOOD DESIGN


The Good Design Award is an award sponsored by the Japan Institute of Design Promotion, and is given once a year to items of outstanding design.



Project references

Introduced in over 50 countries worldwide

Highly popular for their excellent quality, energy efficiency, and ease of installation, Fujitsu General's products are installed in a wide range of buildings around the world, including high-rise office buildings, stores, hotels, public facilities, schools, hospitals, and residences.



For Light commercial use


- 1 Shop in Europe
- 2 Factory in Europe
- 3 School in Asia
- 4 Hospital in Asia
- 5 Office in Asia
- 6 Shop in Oceania
- 7 Office in Oceania
- 8 School in the Middle East
- 9 Public facility in the United States



11



10



13




12




16



14



15



17



For Commercial use

- 10 Public Square in Asia
- 11 Hotel in Asia
- 12 Hotel in Asia
- 13 Public facility in Asia
- 14 Apartment in Oceania
- 15 Apartment in Oceania
- 16 Hotel in the Middle East
- 17 Hotel in the Middle East



18



20



For Residential use

- 18 Villa in the Africa
- 19 Residence in Oceania
- 20 Residence in the United States
- 21 Villa in the Middle East



19



21

Global development & Production bases

We have established R&D bases in five countries from Japan, Europe, Asia, China, and North America to pursue environmental properties and comfort according to the needs of each region.

- • Head office
- • R&D center
- • Manufacturing companies

R&D center & Technology Research Building



R&D center in Fujitsu General (Euro) GmbH (Germany)



North America R&D Center (USA)



Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)



R&D center in Fujitsu General (Shanghai)



JAPAN Head office, R&D center and 60 m height difference testing tower (Japan)


• Fujitsu General (Euro) GmbH
— R&D center

• FGAHP

• North America R&D Center
— R&D center

Technology research building
in Japan Head office

Constructing IoT-based manufacturing
We are implementing a real-time IoT-enabled system to immediately visualize and analyze various information such as facility operating status, assembly line production progress, and parts inventory and transportation status. This will further enhance the accuracy of production and shipping forecasts in the Head Office and factory management departments. The system will also help improve activities by employees at production sites, with the aim of improving the efficiency of the production process, the efficiency of parts distribution operations, and the utilization rates of the facilities.

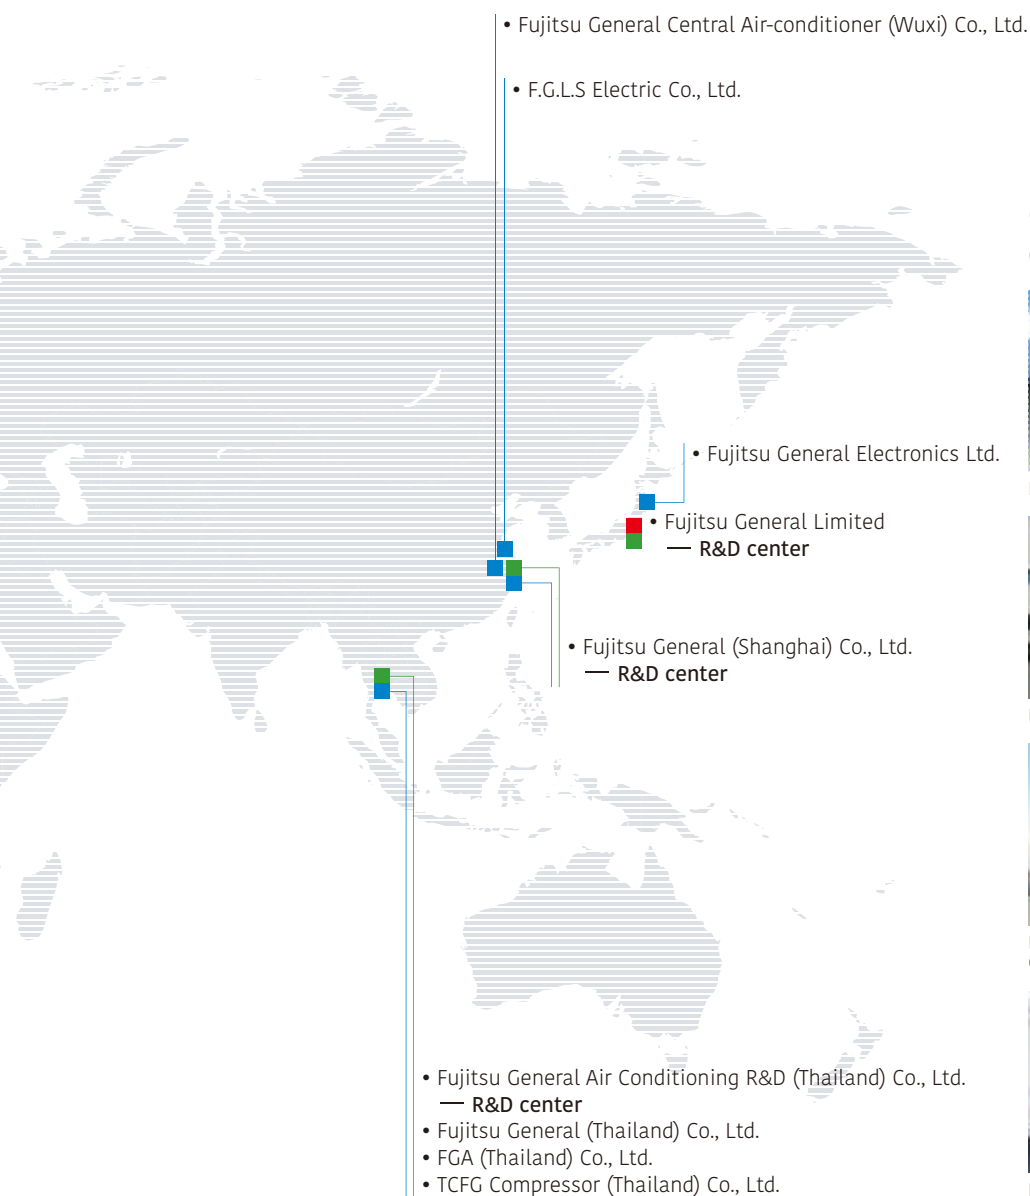

Overseas manufacturing companies



Fujitsu General (Shanghai) Co., Ltd. (China)



F.G.L.S. Electric Co., Ltd. (China)



Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd. (China)



Fujitsu General Electronics Ltd. (Japan)




FGAHP



Fujitsu General (Thailand) Co., Ltd. (Thailand)



FGA (Thailand) Co., Ltd. (Thailand)

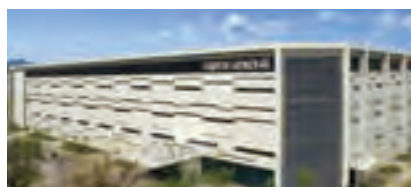

Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)



TCFG Compressor (Thailand) Co., Ltd. (Thailand)

High-quality development & Production facilities

Advanced Research Facilities and Equipment

Performance tests




Airflow measurement room

Measure the airflow of air conditioners, from compact room air conditioner models to variable refrigerant flow (VRF) systems.



Calorimeter

Measure the temperature, humidity, and airflow at the inlet and outlet of the air conditioner to evaluate its cooling and heating capacity.



Silent room

Measure the operating sounds of air conditioners on walls and ceilings with reduced sound reflection.

Fujitsu General is one of Japan's leading manufacturers with R&D centers in Japan. The research and development conducted in these facilities contributes to providing our customers with the highest quality and performance.

Reliability tests



Constant temperature room

Verify product performance in cooling and heating operations under various temperature and humidity conditions.



Practical test room

Check whether the performance of the air conditioner can be sustained under the conditions of the actual housing environment.



Shower test room

Check if the electrical box of the outdoor unit is protected from strong wind and rain, such as during a typhoon.

Transportation and Handling Tests



Compressibility test





Vibration test



Technology research
building
in Japan Head office

Testing laboratory

Fujitsu General EMC Laboratory Limited



60-m Height Difference testing tower


Tests oil circulation in a compressor for reliability.



Certification of ISO 9001 and ISO 14001

■ ISO 9001
■ ISO 14001
() Number of companies

The Group's 5 overseas production subsidiaries are individually certified with ISO 9001 and ISO 14001.
The Group's 11 overseas sales subsidiaries have been certified with ISO 14001 since 2012.

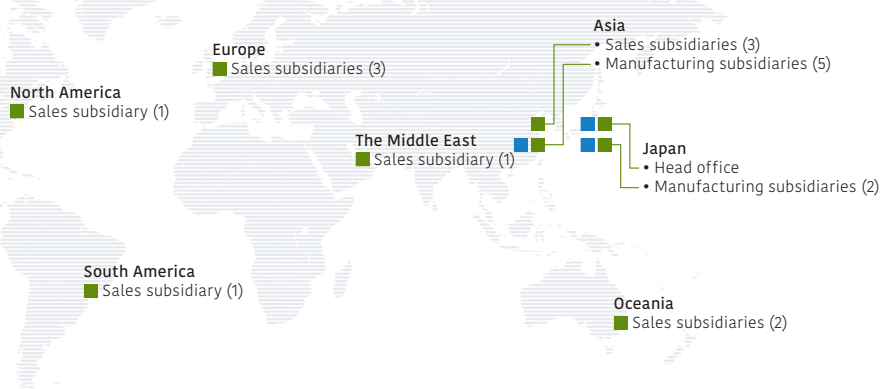

Product Quality Assurance


All Fujitsu General plants are ISO 9001 certified and operate under a unified quality control system. We deliver to customers all over the world high-quality products that have passed stringent quality inspections.

Receiving inspection

We require all our parts suppliers to submit test reports to ensure that all parts we receive from them meet our quality standards. Our in-house test department inspects incoming parts to ensure their compliance with RoHS as required by the EU. We also conduct 100% inspection of main parts to prevent defective parts from making it to assembly lines.

Quality inspection of products

We carry out stringent quality inspections in all production processes performed in our plants. To keep the quality of our products high, inspectors check their quality from start to finish on production lines.

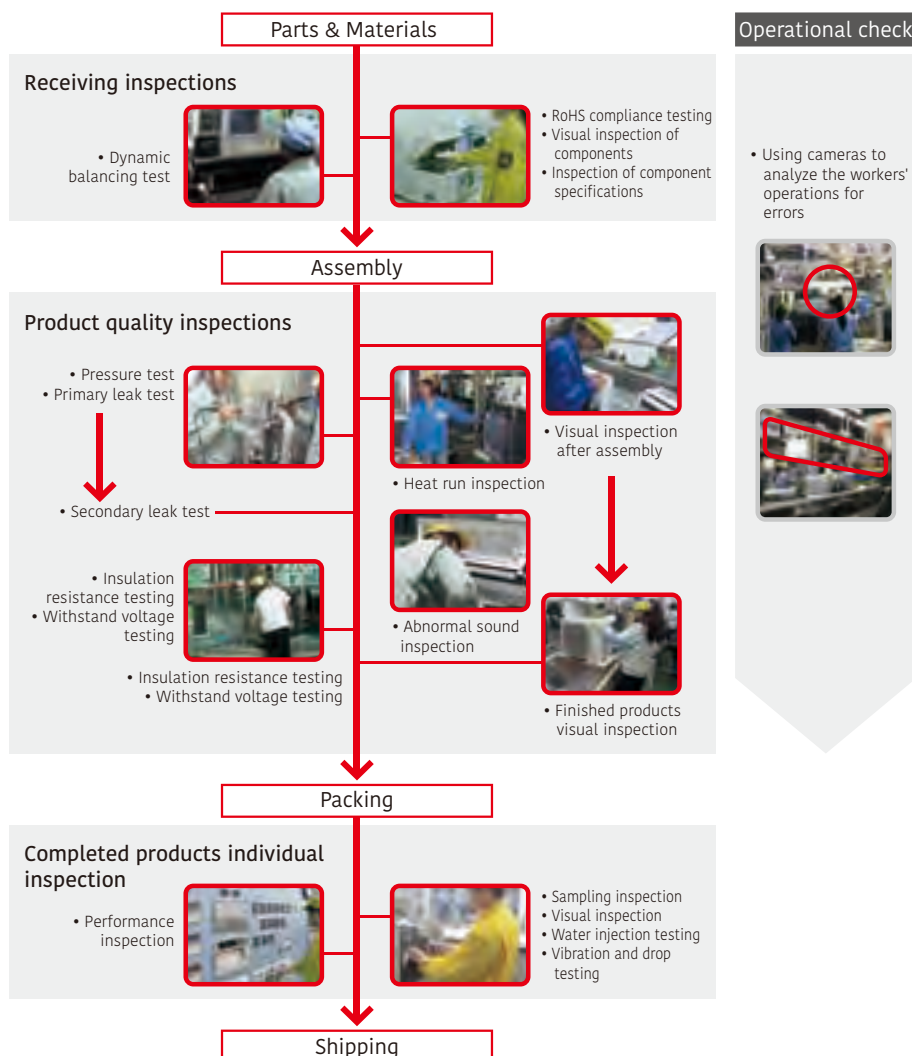

2025 New Products



Split, Wall-mounted type
Built-in W-LAN adapter models



Standard Range
High-Efficiency & Comfort

Soft black color models

S-020

M-022

- Soft Black
- 7-14 classes, 4 models
- High energy saving
- Built-in WLAN adapter
- Easy access to the flare pipe connection

Impression of Soft Black

Soft Black is a natural black color with a relatively gentle tone and no strong contrast. A Soft Black harmonizes with the environment and creates a warm atmosphere.



AIR TO WATER

New Monobloc system

Comfort series

W-012-021

- 5-10 kW classes, 3 Models
- High energy efficiency
- Quiet operation
- Easy installation & maintenance



Indoor unit



Outdoor unit



VRF

VRF J-VS

Heat Pump for Small-capacity type

Outdoor unit

V-020-025



For Sustainable Future

Our VRF systems will change to eco-friendly models with the R32 refrigerant



J series

V series

From Business to private spaces

SOLUTIONS



Key solution points

Fujitsu General's total solutions are tailored to each property's unique needs.



Fujitsu General provides
the best control solutions
for buildings.

Target buildings

A casual conversation with a colleague at work

A presentation in a large meeting room

A restaurant you stop by Your living room

We have a comprehensive lineup of air conditioners ideal for all these situations—from business to private spaces.

Fujitsu General's air conditioners are used in all aspects of everyday life.



For Light commercial use

Comfortable and economical air conditioning systems, ideal for small and midsize commercial buildings

036 Restaurants, Shops

038 Small offices

040 Hotels

042 Schools



For Commercial use

Single and modular VRF systems for high efficiency, comfort, design flexibility, ease of installation, and high reliability

044 Large Buildings



For Residences

Smart air conditioning systems with extensive control options for comfort and convenience of use

046 Residences



Restaurant, shops

For Light commercial use

Fujitsu General provides perfect total air conditioning systems that offer seamless support by tenant, by purpose, and by customer visit frequency in shops and restaurants with multiple lighting and a high density of customers.



Single split For Restaurants



reddot winner 2020

Circular flow
cassette Series



Compact cassette



Ceiling type



Mini duct



Slim duct




Medium static
pressure duct



High static pressure duct

R32 large model lineup expanded

Expanded lineup of ceiling, cassette, and duct types suitable for large spaces using environmentally friendly R32 refrigerant

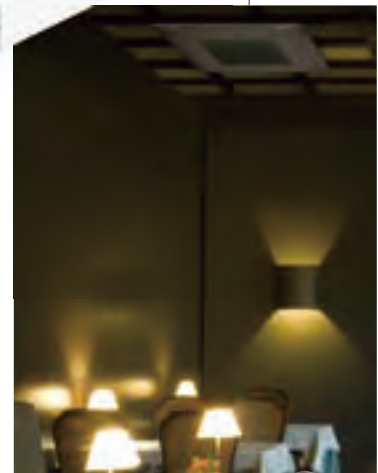

Circular flow
cassette Series
For ambience with
dimmed lighting



For rooms with
bright interiors




Two panel colors

Both black and white panels are available for Cassette type. Black panels are suitable for dark places such as atmospheric restaurants. White panels, by contrast, are more appropriate for use in brightly lit spaces such as offices. (Available for Single split and VRF indoor units)


 REFRIGERANT
R32

Simultaneous multi-split For Shops

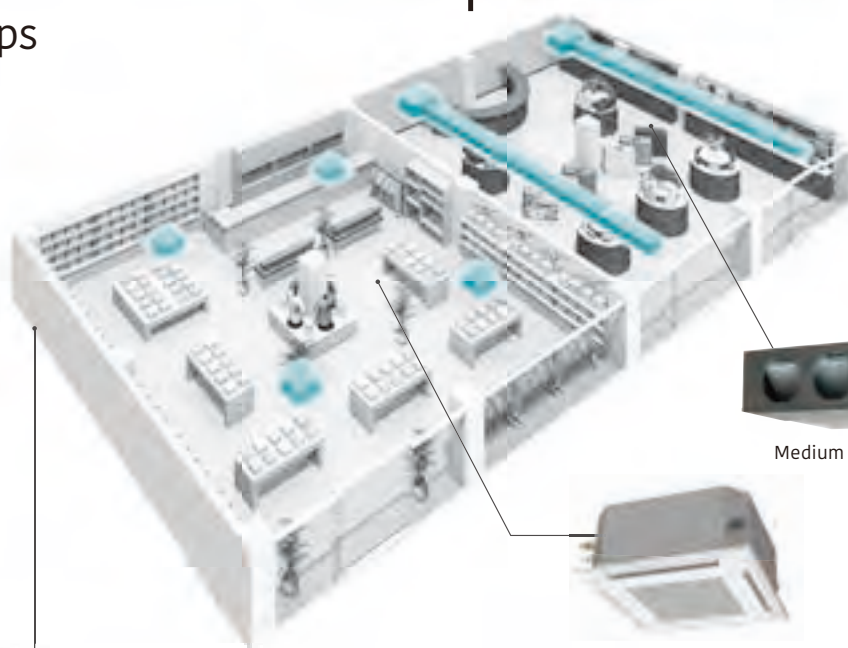

Medium static pressure duct



Compact cassette

Twin 36 class
(Single phase)Twin/Triple 45/54 class
(Single phase)

Various indoor unit lineup

You can choose from 3 types of indoor units to suit the atmosphere and layout of your shop.




Slim duct

Small, lightweight outdoor unit

Models equipped with the new R32 refrigerant. Compared to current models, the outdoor unit is more compact and easier to install. (45/54 models)

Compact cassette Series for grid ceiling were added to the lineup of indoor units to improve ease of installation.

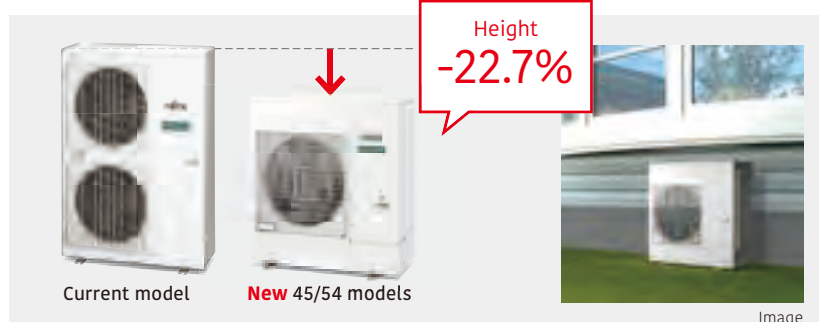

Current model

New 45/54 models

 Height
-22.7%


Image



Small offices

For Light commercial use



Fujitsu General offers a perfect total air conditioning system for small office buildings with multiple small rooms, taking into consideration energy savings, low noise, comfortable air volume, usage and purpose, and centralized control.

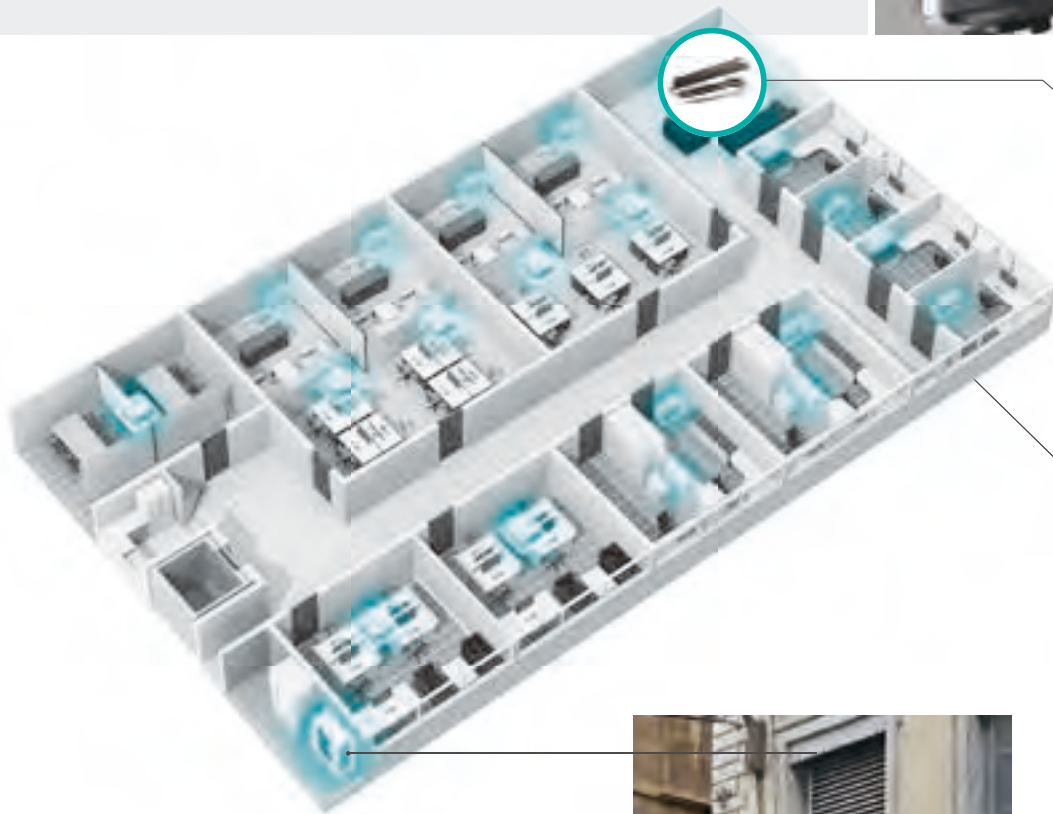

VRF J series compact outdoor units with up to 18 HP

Suitable for the buildings with multiple small rooms. Up to 42 indoor units* can be connected.

*Only J-IVL series 18 HP model

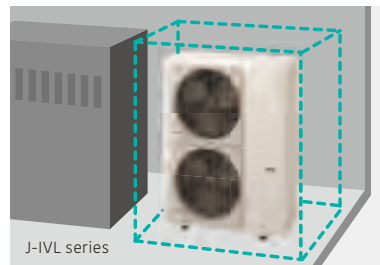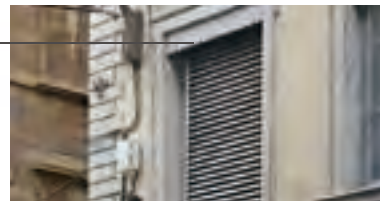

Compact outdoor unit with low noise design

Takes up little space even when installed in a machine room or on the roof. Sufficient static pressure can be maintained even with louvers. Low-noise mode suffices even for nighttime operations at low noise levels.



Breakthrough 3D flow cassette with innovative pursuit of comfort

The left and right air outlet ports with a maximum rotation angle of 100° and the wide central air outlet port create a comfortable space with less uneven temperature.



3D flow cassette

Wide lineup of indoor units of low-capacity class


Various low-capacity 1.1 kW indoor units are available for small rooms and spaces.



Wall-mounted type



Compact floor type

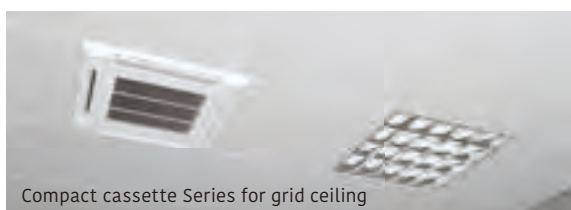

Compact cassette Series for grid ceiling



Central remote controller with improved operability

Controls the temperature of each room easily, and manages and sets the operation control for a week. Energy-saving management by setting upper and lower temperature limits and operating prohibitions.




Central remote controller UTY-DCGYZ3

Remote Management

Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere. When the central remote controller manages the indoor units of some tenants, air conditioning of each tenant can be managed separately online.

Increased the Number of Accounts



Compact wired remote controller


Compact size with a large screen for easy operation. The stylish design harmonizes with the interior.



Hotels

For Light commercial use

Fujitsu General offers total air conditioning systems perfect for low-rise, small hotels that take into account energy savings, external appearance, safety, and ease of installation.

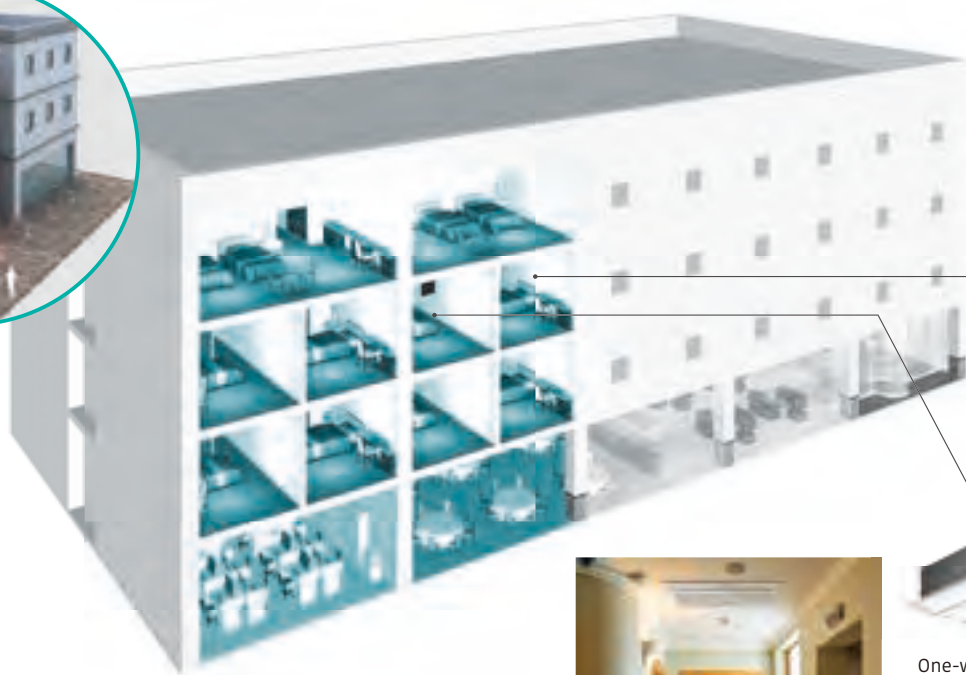

One-way flow cassette Series

Compact chassis with low noise operation. The low operating noise makes the model ideal for use in the corridor of a hotel.

Select the product best suited to the characteristics of the property.

	 Split	 VRF J-VS	 VRF VR-IV
Project size	Small	Middle	Large
Individual Air conditioning	Great	Good	Great
Reduction of installation space	Fair	Great	Great
Landscape (hide outdoor unit)	Fair*	Great	Fair
Maintenance (individualized)	Great	Good	Fair

*Depends on pipe length constraints




Guest room air conditioning with superior comfort, energy efficiency, and ease of installation

Space saving

Mini duct type with a height of 198 mm and a depth of 450 mm. Easily installed in a narrow ceiling space.



Mini duct

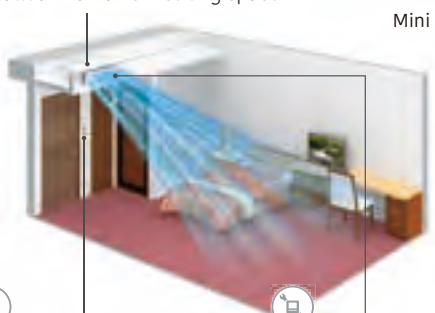

Card key switch available

Linked to a card key to prevent people from forgetting to turn off the air conditioner.



External connection switch



Comfortable airflow by switching the up/down airflow direction


The Auto Louver Grille Kit creates comfortable airflow by adjusting the air direction.



Auto Louver Grille Kit




Ventilation of each room can be achieved relatively inexpensively by combining an appropriate duct fan (locally procured) through a hole for Fresh air in the indoor unit. If the airflow required to ventilate the room is not sufficient, use ERV (Energy Recovery Ventilator).

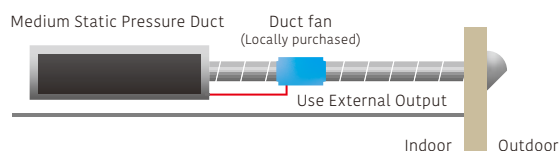

Centralized control of air conditioning for shared spaces

Centralized control of air conditioning for shared spaces Lobbies, hallways, and other common spaces are centrally controlled for air conditioning. Central Remote Controller can manage VRF products, but Split products can also be managed together via Network converter.

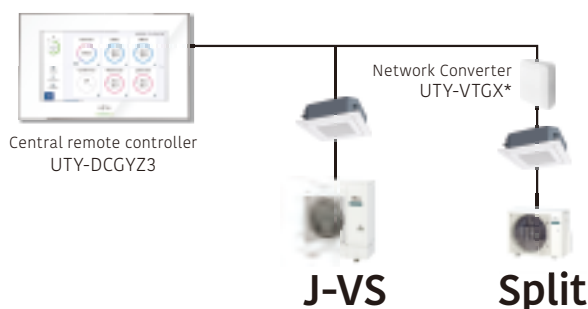

*Some functions will not be available.



Wired remote controller (design type) with sophisticated design. The touch panel can be easily operated by swiping vertically and horizontally.




Wired remote controller (design type) UTY-RVRY



Large space air conditioning for the reception area and lobby

Duct type Big duct Series suitable for large spaces with high ceilings






Schools

For Light commercial use

Fujitsu General offers indoor units that allow multiple connections with a compact design that reduces the installation area and increases the flexibility for selecting installation locations, making them perfect for midsize educational institutions. One single outdoor unit is able to cover an entire school building.

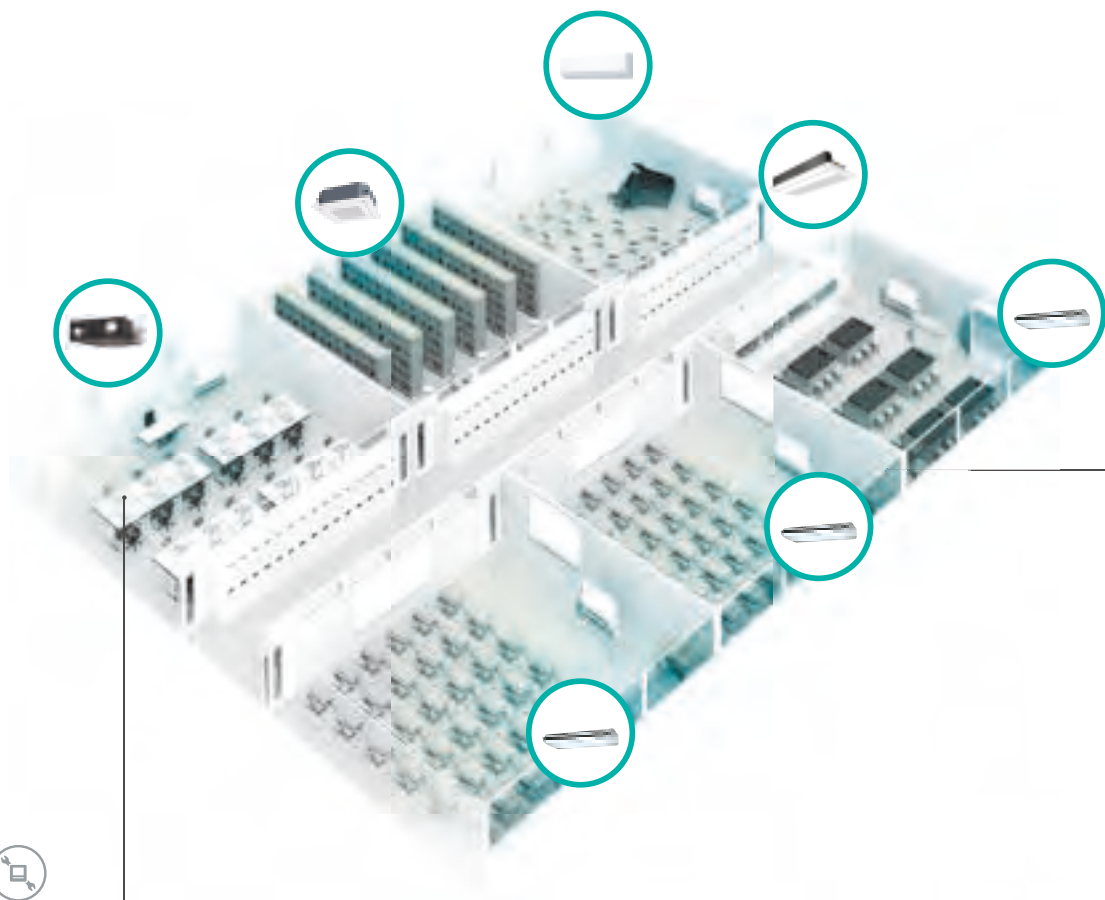

Centralized control of both air conditioning and ventilation equipment

Centralized control is also possible to stop the operation of not only air conditioners but also lighting and ventilation equipment. These features are useful for managing the energy efficiency of the entire building.

VRF indoor units



Facilities



Lighting



Ventilation



Energy recovery ventilator



System controller Lite



One-way flow cassette Series



Mini duct




Ceiling type




Wall-mounted type

Wide variety of indoor units

Support complex applications for regular classrooms, special classrooms and auditoriums. Ventilators can also be added easily.

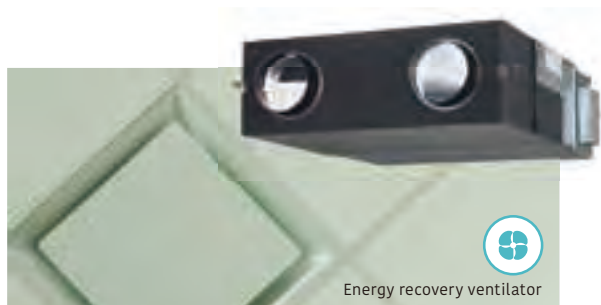

Energy recovery ventilator

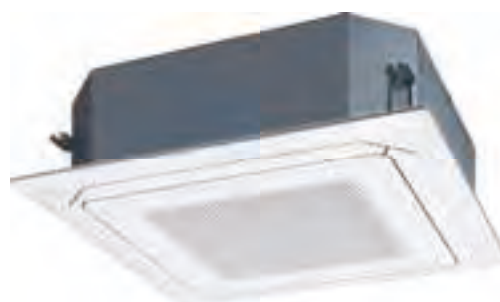



Circular flow cassette Series

Comfortable room air conditioning without airflow sensation


Circular flow cassette blows air in all directions at a uniform temperature.



Individual airflow direction control to prevent people from being exposed to airflow



Energy-saving operation when unattended, in conjunction with a Human sensor.

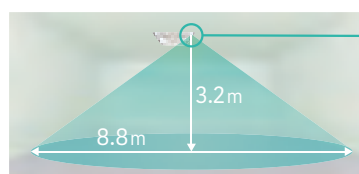

Human sensor (option)



Large buildings


For Commercial use

Fujitsu General offers modular VRF systems that pursue high efficiency, comfort, design flexibility, ease of installation, and reliability for high-rise buildings.



Abundant lineup optimized for the operating environment

The VRF system meets a variety of needs, including energy-saving models and models with compatibility to outdoor temperatures of up to 46°C.

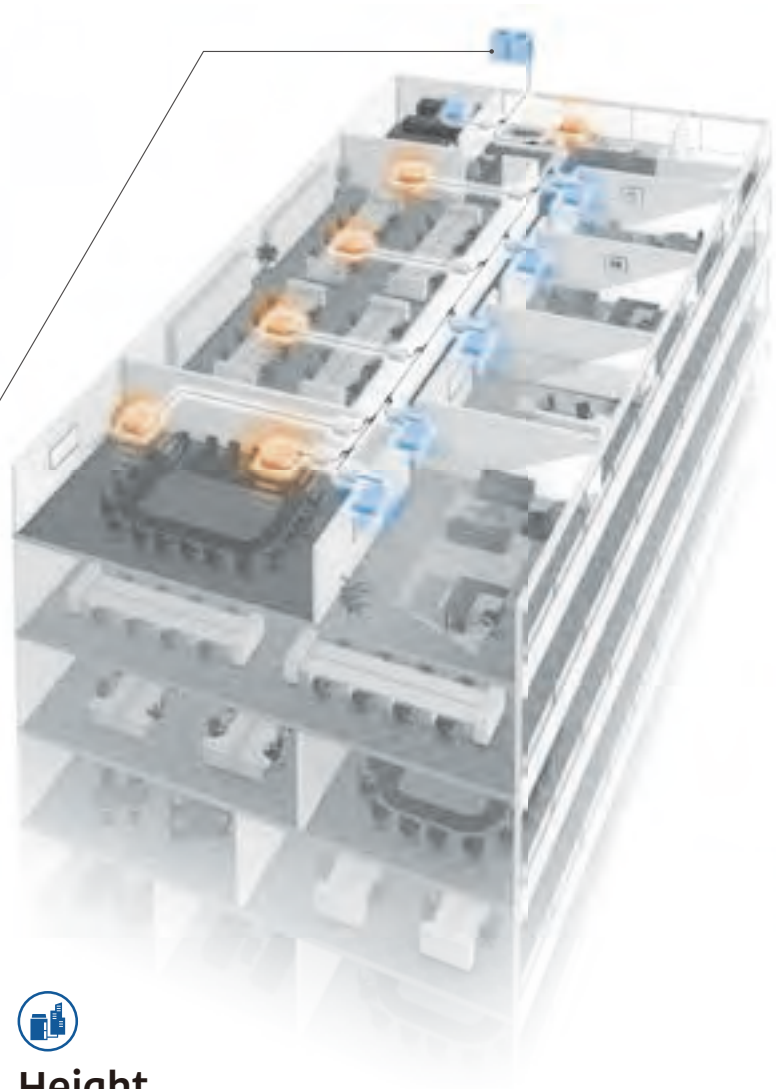

VRF **VR-IV**

Smart, cutting-edge design Extensive lineup from 8 HP to 48 HP with the capacity ratio of indoor units connectable up to 150%.

34 models with 8 to 48 HP

- Space saving combination: 21 models from 8 to 48 HP
- Energy efficient combination: 13 models from 16 to 44 HP

VRF **V-IV**

34 models from 8 to 48 HP

- Space saving combination: 21 models from 10 to 48 HP
- Energy efficient combination: 13 models from 16 to 46 HP



Height difference up to 110 m

The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-IV series, but can be extended to 110 m by installing the Pressure Sensor Kit.

* Can only be connected to the V-IV series



Pressure Sensor Kit




Centralized control

Not only indoor units in the building, but also facilities such as ventilation can be controlled easily by anyone



System controller
(UTY-APGXZ1)


System controller Lite
(UTY-ALGXZ1 & UTY-PLGXX2)

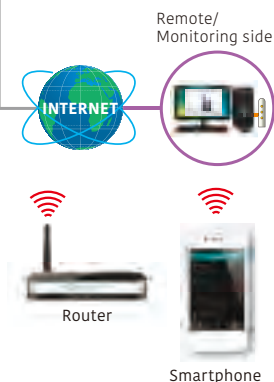

VRF indoor units




Facilities



Linkage with various BMS

Linking with MODBUS®, BACnet®, KNX® and other interfaces allows centralized control of equipment other than air conditioning.

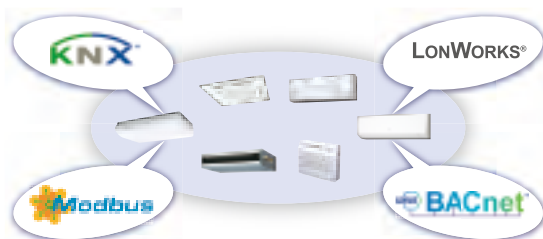


High system flexibility

The industry-leading high static pressure, long pipe design, and connection capacity enable flexible installation on each floor and installation of various indoor units.

82* Pa


*: V-IV series, 80Pa for VR-IV series

Installation example

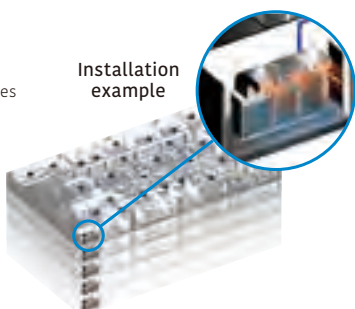

Prompt service support

Web monitoring tool and System controller remotely monitor the air conditioning of the entire building. Self-diagnosis in cooperation with the management company enables quick response in case of an emergency.

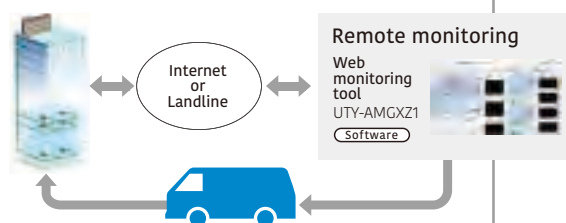




Residences

For Apartments & Houses

From the living room, where the whole family relaxes, to bedrooms, children's rooms and other small rooms, Fujitsu General has designed systems suited to spaces that reflect the rhythm of life.

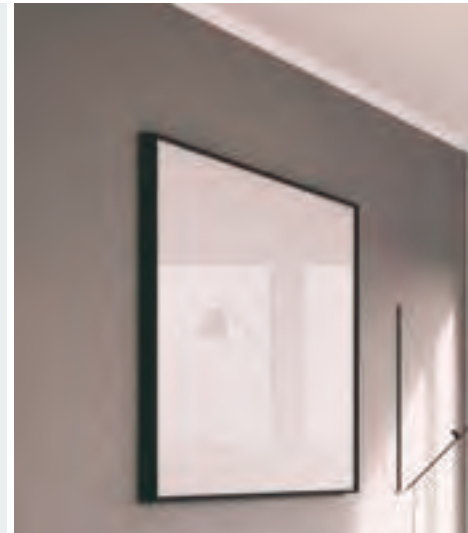

A variety of indoor units to suit the characteristics of each room



For Living & Dining room

Cool beauty design model

This series features a special European-style design. The light, elegant and three-dimensional expression achieved by the curved surface is beautiful from all angles.

KE
Series



KM
Series

For Large rooms

Standard & Comfort model

The basic functions and powerful, comfortable airflow volume controls are optimal for large spaces.



KG
Series




GOOD
DESIGN



KL
Series



GOOD
DESIGN



For Primary bedrooms or Living rooms

Award winning design, Quiet models

High performance, low noise with emphasis on design



KM
Series



GOOD
DESIGN

High performance with MINIMAL SMART design

ECO Range, Compact size

Cooling operation is possible even at an outside temperature of 52°C, providing comfort even in hot areas.

REFRIGERANT

R32

Outdoor units suitable for residential environments



R32 Multi-split type released

Models are now available with environment-friendly R32 refrigerant. A number of products with improved external design have been added to the indoor unit lineup.



Wall-mounted type



Ceiling type



Operated by smart speaker

Simply talk to the smart speaker to operate the air conditioner and check its operating status while doing other things.



+

AIRSTAGE
Mobile

Download Free

Download on the
App Store

GET IT ON
Google play

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.



Residential

AIR TO WATER

- W-002 AIR TO WATER Overview
- W-004 Things we can contribute to
- W-006 Energy Efficiency Standards
- W-008 AIR TO WATER Series Overview
- W-010 AIR TO WATER Lineup
- W-012 Monobloc Type
 - Comfort series
- W-022 Split Type
 - Comfort series
 - High Power series
 - Super High Power series
- W-038 Indoor Units
 - Type-A, Type-B
- W-042 Optional Parts & Control Overview
- W-044 Optional Parts List for Monobloc type
- W-050 Control Overview
- W-052 Optional Parts Overview
- W-054 Optional Parts List for Split type




AIR TO WATER

Residential

AIR TO WATER Overview

Solutions that meet a variety of needs

Water heated by Air to Water, which uses clean energy, can provide a steady supply of comfortable water throughout the home for heating and hot water applications.

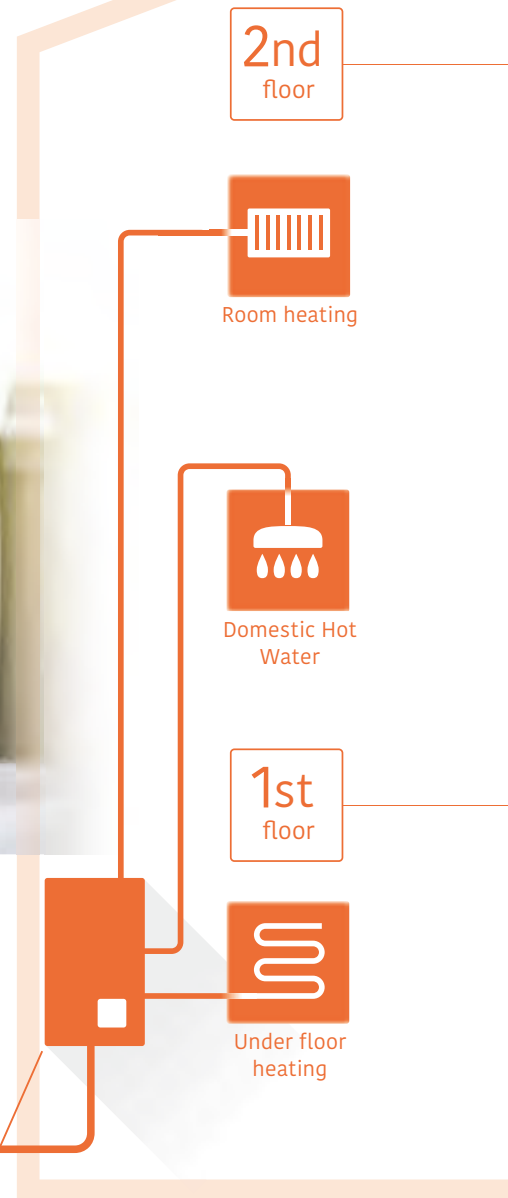

Air to Water heat pump

Outdoor unit

The unit is used to extract heat from the environment, making use of renewable energy resources from the sun and the outside air.



Indoor unit control box*

If you want to update your system by reusing your existing pump and buffer tank, etc., you can do so by installing only the control box.

OR



Indoor unit Wall mounted

Stands for preparation of heating water for under floor heating and radiators. It can optionally operate with domestic hot water tank.

OR



Indoor unit Domestic Hot Water integrated

Can be used with a variety of heating systems, including under floor heating and radiators. Space saving heating and DHW supply in a single indoor unit.

*The control box can only be selected for Monobloc outdoor units.

Bedroom & Bathroom




Living & Dining Kitchen



Ecological consideration in your home

Heat pump system framework

Heat is absorbed from the atmosphere by expanding the refrigerant. Higher-temperature heat is generated by compressing the refrigerant, and the indoor unit transfers that heat to the water.

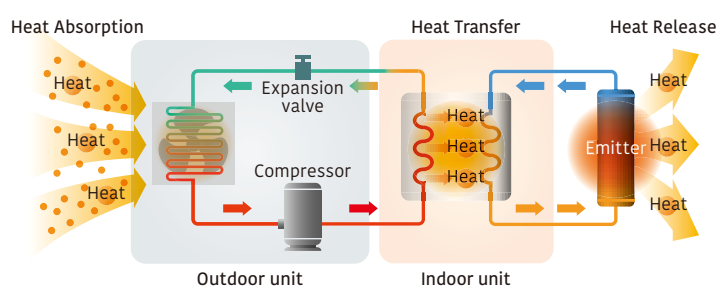

*Split products are listed as examples.

Things we can contribute to




Our Goal

Decarbonisation

European Commission is committed to decarbonisation and has a national target of “**Net Zero**” carbon emissions by 2050.


We need to reduce carbon emissions with green technology products and increase carbon absorption by working to extend nature.

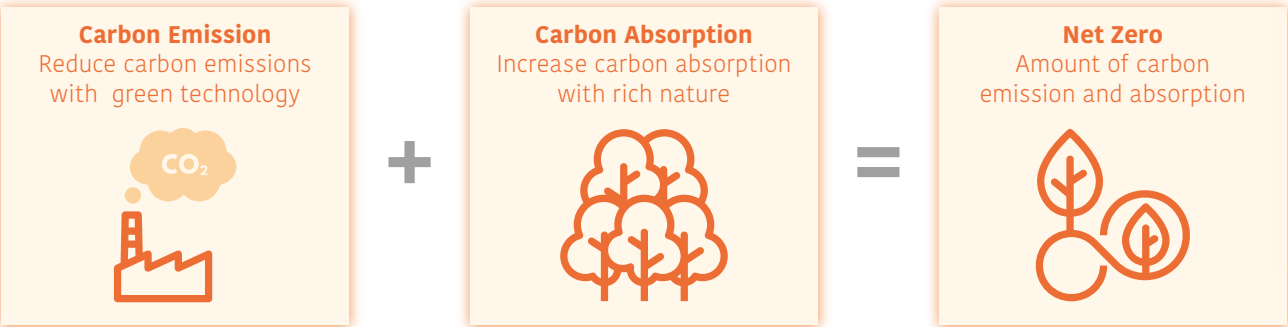

Fujitsu General's ATW system will provide the best solutions that are friendly to the environment and people with products conscious of decarbonisation.

What is a heat pump?


A heat pump extracts heat energy from the atmosphere. It requires only 1 kW of electricity to generate 3 to 5 kW of thermal energy.

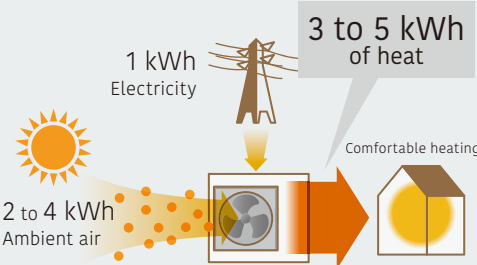

Primary energy usage reduced substantially

Proportion of primary energy converted into heating energy is 100%

Primary Energy Consumption*

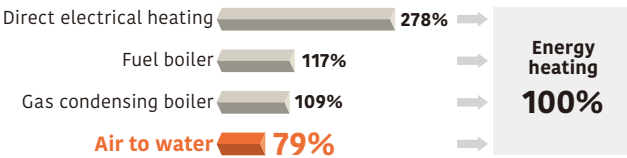


* The amount of electricity loss varies according to the power plant. Typical energy efficiency of a power plant: 36%


The Choice of ATW

Optimized refrigerant cycle operation

Split Type

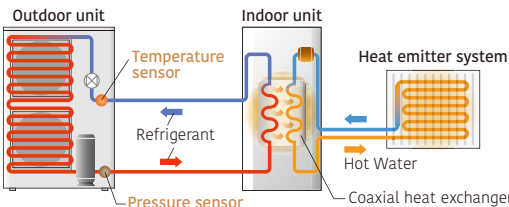


Monobloc Type

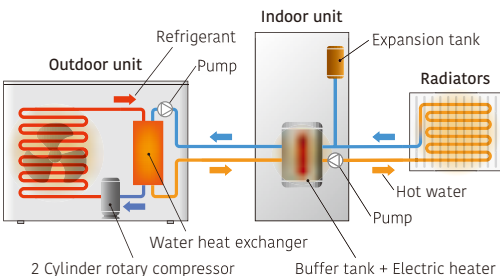

Energy Efficiency Standards

Product labels

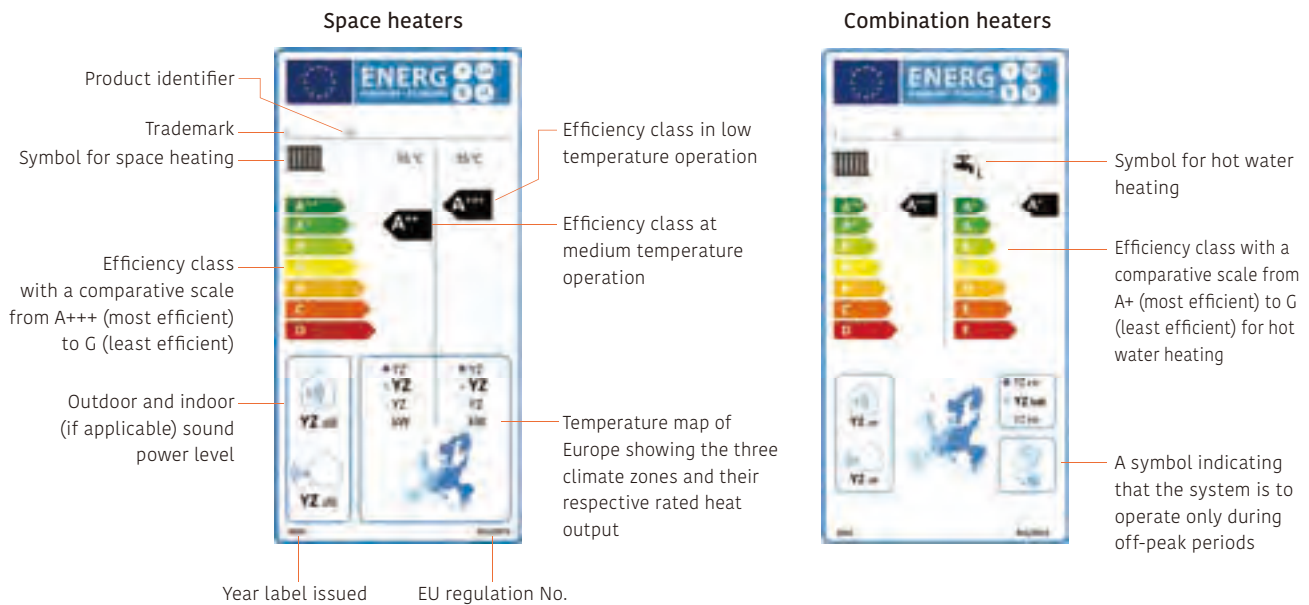

The Ecodesign Directive Lot 1 Regulation 813/2013

The Ecodesign directive defines a regulatory framework for improving the environmental performance of energy-related products (ErP) through design. Since September 26, 2015, the Ecodesign Directive has applied to space heaters, including heat pumps and fossil fuel fired boilers, combination heaters for space and hot water heating, water heaters, and water storage tanks. All of these products must meet minimum requirements for energy efficiency*1 and maximum sound power level. The minimum energy efficiency class were raised on September 26, 2017, and the maximum sound levels were lowered on September 26, 2018.

*1: Energy efficiency is expressed in terms of seasonal space heating efficiencies (η_s). The value is based upon the Seasonal Coefficient of Performance (SCOP).

The Energy Labelling Directive (EU) No. 811/2013

Energy label is intended to enable consumers to make direct comparisons of energy use and product features. All labels should indicate the product identifier, efficiency class, sound power level, and heat output. Heat generators are rated A+++ to G. There are two different product labels. One for space heaters and one for combination heaters.

Seasonal space heating Energy efficiency class

Except low temp. HP 55°C	Low temp. HP 35°C
A+++ $\eta_s \geq 150$	$\eta_s \geq 175$
A++ $125 \leq \eta_s < 150$	$150 \leq \eta_s < 175$
A+ $98 \leq \eta_s < 125$	$123 \leq \eta_s < 150$
A $90 \leq \eta_s < 98$	$115 \leq \eta_s < 123$
B $82 \leq \eta_s < 90$	$107 \leq \eta_s < 115$
C $75 \leq \eta_s < 82$	$100 \leq \eta_s < 107$
D $36 \leq \eta_s < 75$	$61 \leq \eta_s < 100$
E $34 \leq \eta_s < 36$	$59 \leq \eta_s < 61$
F $30 \leq \eta_s < 34$	$55 \leq \eta_s < 59$
G $\eta_s < 30$	$\eta_s < 55$

Due to restrictions on the use of fossil fuels in Europe and the F-Gas regulations, the use of environmentally friendly heating equipment is required not only for new buildings but also for renovated properties. Let's consider installing high energy efficiency products that will be essential for future living environments.

Heating equipment

A+++



AIR TO WATER Series Overview



RESIDENTIAL

For New construction



For Renovation




Monobloc type

Series	System Outline	Refrigerant	Recommended Buildings for Installation
Comfort series  Control box  Wall mounted  DHW integrated  5kW  8/10kW	Indoor unit Control box consists of the hot water circuit controller and the user interface. It is not connected to the water pipe. Outdoor unit - Supplies 60°C hot water even when the outdoor temperature is -5°C. - Supplies 55°C hot water even when the outdoor temperature is -10°C. - Can be used with a variety of heating systems, including under floor heating and radiators.* - Heating and DHW supply in one system.* - Up to Three independent control circuits.* - Operating range is -20 to 35°C in heating. - Cooling operation is possible		 

* Please refer to page W-046 and W-047 for optional parts information.

ATW Product simplified selection method

Please select a product based on the amount of heat required to maintain a comfortable temperature in the house, just as with air conditioners. For example, the Split comfort series with a low Capacity Range is recommended for newly built houses, as they tend to have high insulation performance.

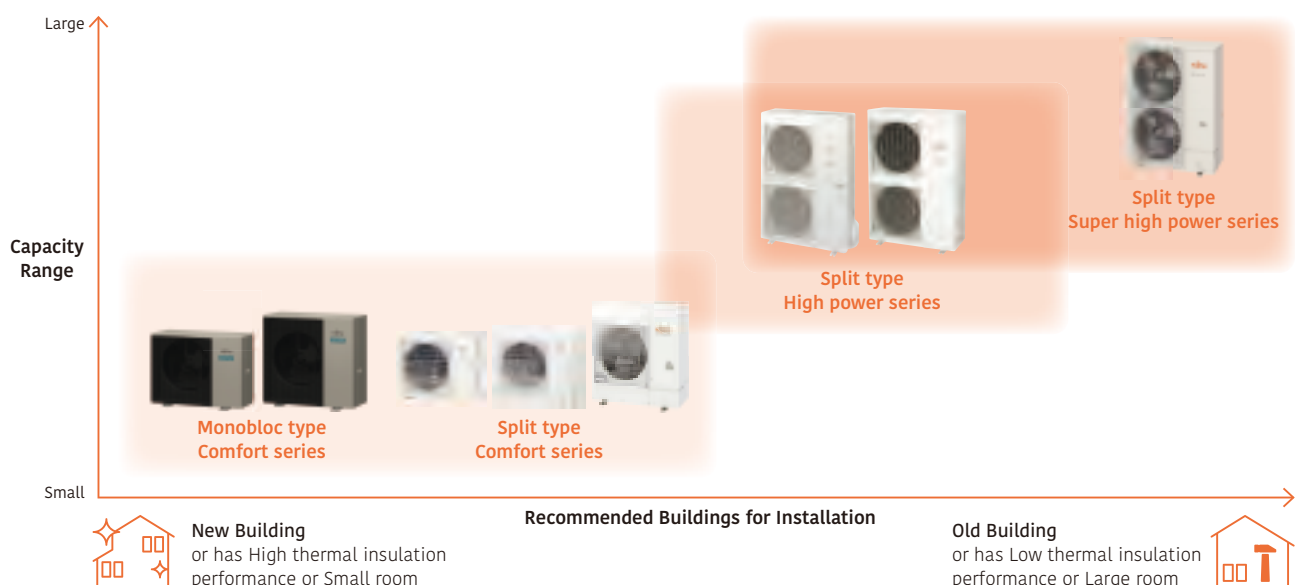



RESIDENTIAL

For New construction



For Renovation





Split type

Series	System Outline	Refrigerant	Recommended Buildings for Installation
Comfort series  Wall mounted  DHW integrated    5/6kW 8kW 10kW	- Supplies 55°C hot water even when the outdoor temperature is -10°C. - Heating and DHW supply in one system.* - Equipped with additional electric heater for backup - Up to two independent control circuits.* - Cooling operation is possible.* - Operating range is -20 to 35°C. - Can be used with a variety of heating systems, including under floor heating and radiators.*		
High power series  Wall mounted  DHW integrated   11/14kW 11/14/16kW	- Supplies 60°C hot water even when the outdoor temperature is -20°C. - Can be used with a variety of heating systems, including under floor heating and radiators.* - Heating and DHW supply in one system.* - Up to two independent control circuits.* - Cascade connection is possible for up to three systems.* - Cooling operation is possible.* - Operating range is -25 to 35°C.		 
Super high power series  Wall mounted  DHW integrated  15/16/17kW	- Supplies 60°C hot water even when the outdoor temperature is -20°C. - Can be used with a variety of heating systems, including under floor heating and radiators.* - Heating and DHW supply in one system.* - Equipped with additional electric heater for backup - Up to two independent control circuits.* - Cooling operation is possible.* - Operating range is -25 to 35°C.		

* Please refer to page W-058 and W-059 for optional parts information.

AIR TO WATER Lineup

Type	Series	Refrigerant	Model	Power Source	Capacity 5kw
Monobloc type	Comfort series Control box type	 Heating & Cooling		Single phase, ~230 V, 50 Hz	UTW-SCBEC WPEG050KRF
	Comfort series Wall Mounted type	 Heating & Cooling		Single phase, ~230 V, 50 Hz	WSEP100KR3 WPEG050KRF
	Comfort series DHW Integrated type	 Heating & Cooling		Single phase, ~230 V, 50 Hz	WGEP100KR3-19 WPEG050KRF
Split type	Comfort series Wall Mounted type	 Heating*		Single phase, ~230 V, 50 Hz	WSYA050ML3 WOYA060KLT
	Comfort series DHW Integrated type	 Heating*		Single phase, ~230 V, 50 Hz	WGYA050ML3 WOYA060KLT
	High Power series Wall Mounted type	 Heating*		Single phase, ~230 V, 50 Hz	
		 Heating*		3-phase, ~400 V, 50 Hz	
	High Power series DHW Integrated type	 Heating*		Single phase, ~230 V, 50 Hz	
		 Heating*		3-phase, ~400 V, 50 Hz	
	Super High Power series Wall Mounted type	 Heating*		Single phase, ~230 V, 50 Hz	
		 Heating*		3-phase, ~400 V, 50 Hz	
	Super High Power series DHW Integrated type	 Heating*		Single phase, ~230 V, 50 Hz	
		 Heating*		3-phase, ~400 V, 50 Hz	

EHPA Quality Label



Fujitsu General's Air to water*² has acquired the EHPA Quality Label*³ through testing in accordance with the International Standards EN14511 and EN17025. The EHPA Quality Label*³ is a label that shows the end-consumer a quality heat pump unit on the market.

*²: 3-phase high power series only

*³: Learn more about the validity of the mark at www.ehpa.org/quality/quality-label/

SG ready Label



SG ready is a label issued to heat pumps and their control technologies that meet the requirements set by BWP*⁴, and technologies that conform to their standards can be integrated into a smart grid. SG ready labeled heat pumps receive signals from the power grid and PV systems with regard to energy and renewable energy sources such as wind, solar, and water. All of Fujitsu General's new heat pump series are SG ready compatible.

*⁴: BWP: Bundesverband Wärmepumpe e. V. (Federal German Heat Pump Association)

Capacity								Approval	
6kw	8kw	10kw	11kw	14kw	15kw	16kw	17kw	CEN KEYMARK	EHPA
	UTW-SCBEC WPEG080KRF	UTW-SCBEC WPEG100KRF							
	WSEP100KR3 WPEG080KRF	WSEP100KR3 WPEG100KRF							
	WGEP100KR3-19 WPEG080KRF	WGEP100KR3-19 WPEG100KRF							
WSYA080ML3 WOYA060KLT	WSYA080ML3 WOYA080KLT	WSYA100ML3 WOYA100KLT							
WGYA080ML3 WOYA060KLT	WGYA080ML3 WOYA080KLT	WGYA100ML3 WOYA100KLT							
			WSYG140DG6 WOYG112LHT	WSYG140DG6 WOYG140LCTA					
			WSYK160DG9 WOYK112LCTA	WSYK160DG9 WOYK140LCTA		WSYK160DG9 WOYK160LCTA			
			WGYG140DG6 WOYG112LHT	WGYG140DG6 WOYG140LCTA					
			WGYK160DG9 WOYK112LCTA	WGYK160DG9 WOYK140LCTA		WGYK160DG9 WOYK160LCTA			
						WSYG160DJ6 WOYG160LJL			
					WSYK170DJ9 WOYK150LJL		WSYK170DJ9 WOYK170LJL		
						WGYG160DJ6 WOYG160LJL			
					WGYK170DJ9 WOYK150LJL		WGYK170DJ9 WOYK170LJL		

*Cooling is available by using the option

The CEN Heat Pump KEYMARK



The Heat Pump KEYMARK is a full certificate supporting the quality of heat pumps in the European market. The Heat Pump KEYMARK is a voluntary, independent, European certification mark (ISO Type 5 Certification) for all heat pumps, combination heat pumps, and hot water heaters (as covered by Ecodesign, EU Regulation 813/2013 and 814/2013). Fujitsu General's Air to water^{*5} has acquired the KEYMARK certificate^{*6}.

*5: R32 refrigerant comfort model only

*6: Learn more about the validity of the mark at www.heatpumpkeymark.com/about/






Monobloc Type

Comfort series

System configuration example

No refrigerant piping is required as outdoor unit and indoor unit (or tank) are connected by water piping

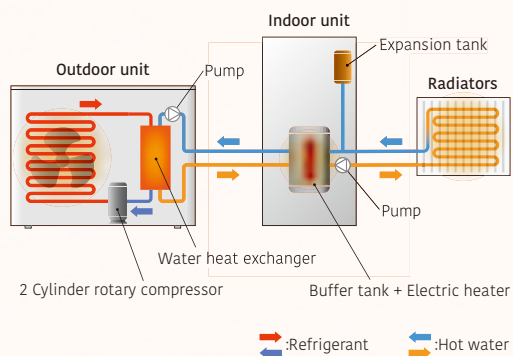

*System configuration when using wall-mounted indoor unit

Fits into Your Life



Monobloc type with fewer pipe works and easy installation. It provides a wide variety of solutions to meet the usage environment.

Aesthetic and compact design

By changing from the conventional two-fan system to a large-diameter single-fan system, we have been able to keep the height down. Because it is lower than a house window, you won't have any trouble finding a place to install the outdoor unit.



High Energy Efficiency

Energy efficiency class



*Temperature application: Heating temp. 35°C

Plate heat exchanger with high heat exchange performance improves energy-related product performance, achieving high energy efficiency.
All classes achieved top rank A+++* energy efficiency class.

Seasonal space heating energy efficiency (η_s)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C



* Value when the control box is connected

Compact & High efficiency
Plate heat exchanger

Transmitting the heat of the Refrigerant to the Water.




5 kW class



Inverter technology

Inverter-equipped models operate at a capacity suited to the heat load. Because they can respond to heat loads in detail, inverter-equipped models are more economical and comfortable than non-inverter models. Compared to a non-inverter, it reaches the set temperature more quickly, operates at the minimum capacity and responds to slight changes in water temperature. The range of water temperature fluctuation is small, and a comfortable temperature is maintained.


Inverter technology controls temperatures precisely.

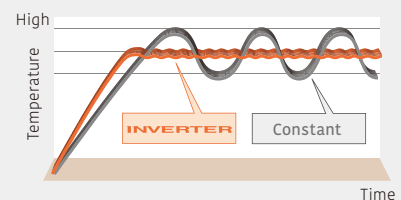

Technology to achieve high efficiency

High-precision parts

The precision machining of parts has improved the degree of adhesion between parts. Refrigerant leakage from gaps has been reduced, leading to improved compression efficiency and high-efficiency operation. In addition, the contact surfaces between parts have been smoothed and the amount of wear has been reduced, resulting in stable performance over a long period of time.

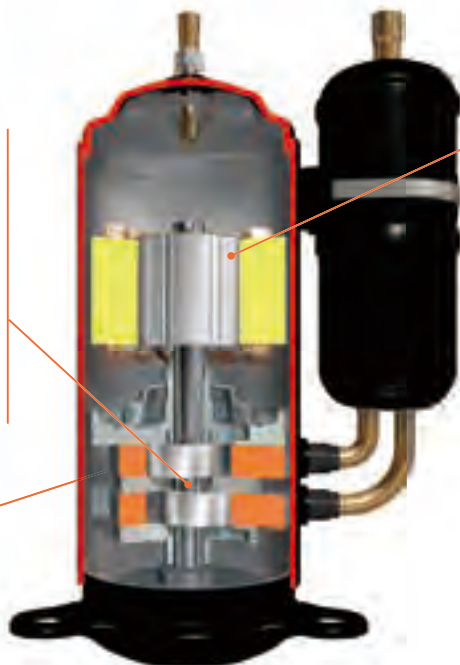

2 Cylinder rotary compressor

High-magnetic flux motor

Copper and iron losses are thoroughly suppressed to realize high magnetic flux of the motor. The high magnetic flux produces stronger torque than ever before. Thanks to this, operation with less current is possible, bringing out high-efficiency operation.



Smooth gas flow


The arrangement of parts that do not obstruct refrigerant flow in the compressor leads to highly efficient operation. Broad interpretation of the optimization of refrigerant flow paths has resulted in about 13 patents.



Larger fan

Low noise operation

In the outdoor unit, a larger fan and a sound-insulating structure in the compressor part reduce the maximum operating noise. The new Monobloc outdoor unit can operate silently at 52 dB(A)* with high energy efficiency. *050 models

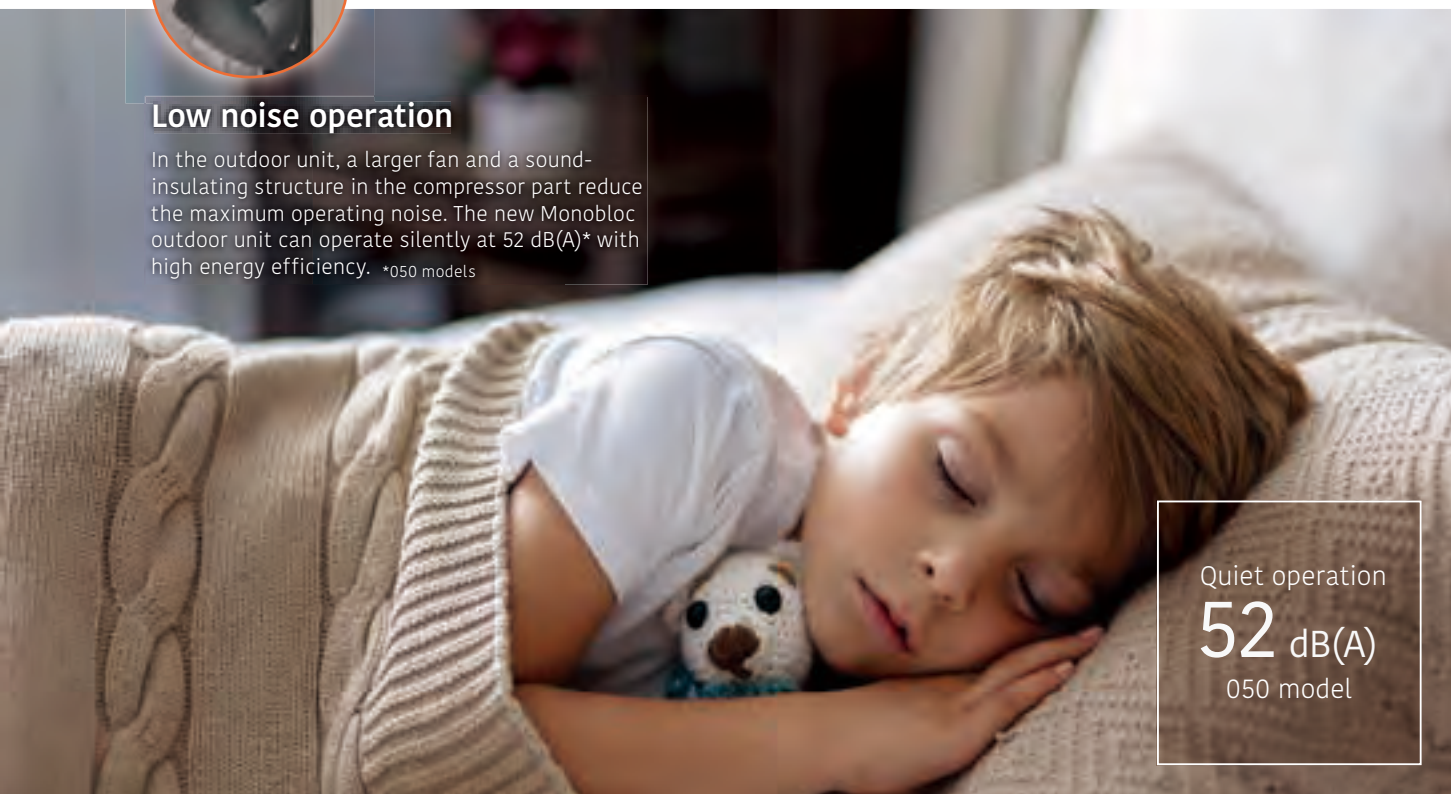

Quiet operation

52 dB(A)

050 model

Durability and Reliability

We take care to ensure that our products can be used by our customers for a long time.
We have taken measures to reduce damage to our products even in the event of problems with the installation environment or during operation.



8 & 10 kW classes

Pressure switch

The pressure switch equipped on the refrigerant cycle protects the system from malfunction that may be caused by abnormal refrigerant pressure.

Silicon coating of PCBs


The silicon coating protects the PCBs and their components from damage caused by small animals living in the electrical box and salt.

Optimized shaft design

- The stress on specific parts is reduced, reducing the risk of wear and damage
- Vibration during rotation is reduced, reducing wear and fatigue damage, and ultimately improving durability

DLC coating vane

- It has a very high hardness and low wear coefficient, and shows excellent resistance to wear
- It is chemically stable and has excellent resistance to various working fluids and environmental conditions, so it protects the vanes from corrosion and chemical degradation, contributing to a longer lifespan

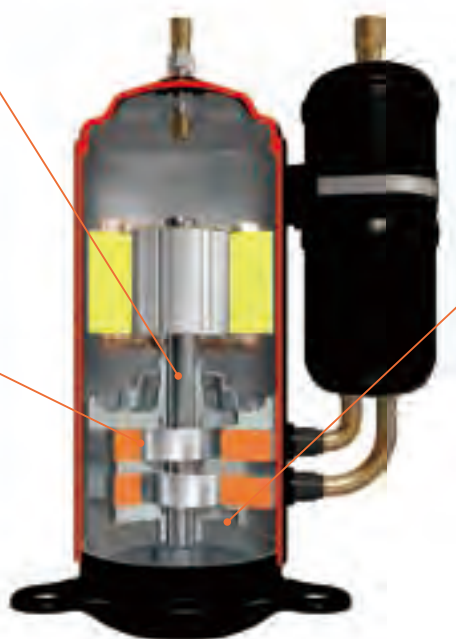

2 Cylinder rotary compressor

Technology to increase durability

Optimal lubricant

- Prevents friction and heating of parts, improving durability
- Contains rust-proofing and antioxidant agents, protecting metal parts from corrosion and preventing breakdowns and performance degradation
- Reduces impact between parts, suppresses vibration, and prevents excessive stress on parts, improving durability



*The values in the pictures are examples.

Service Monitor Tool

UTY-ASSXZ1

Bluetooth communication

AIRSTAGE Service Monitor Tool can diagnose using a smart device and reduce the working time compared with diagnosis by PC. No need to connect a PC making diagnosis easier even in narrow spaces.



New application with simple design

New application for smart devices has been released. The stylish design makes the application easy to use for everyone.

Refrigerant cycle diagram display

The operating status can be displayed with a simple, clear diagram*² on the smart device. It reduces the time for diagnosis and makes diagnosis easier. It can complement abundant experience and advanced knowledge of refrigerant cycle. This shortens the training time for service personnel.

*²: List and graph displays are also available



Compact and lightweight design

New model is easy to carry by compact and lightweight design. The service personnel can visit the maintenance site with small luggage.



Function List

		UTY-ASSXZ1
Product specification	Installation	Outdoor unit PCB
	Communication	Bluetooth
Function	Product distinction	●
	Signal-type distinction	●
	Operating status display	List
		Graph
		Refrigerant cycle diagram
		Operating history records
	Adapter firmware update	●
	Adapter status monitoring	●
	Input and output of history data	●

Specifications

	UTY-ASSXZ1
Dimensions (H x W x D) (mm)	20 x 35 x 60 (adapter)
Communication cable (cm)	60
Weight (g)	25 (adapter)
Communication method	Bluetooth 5.3
Max. communication distance (m)	10* ³
Compatible device	Android8.0, iOS17 or later

*³: Depends on the environment

Serviceability and Maintainability

Easy pipe work

No refrigerant piping work is required as the outdoor unit is an integrated unit. The hot water unit comes standard with the outdoor unit. Installation requires only hydraulic connection work, making installation easy.



Easy Installation


Wiring connections can be made simply by removing the side panel, so installation work can be easily carried out from a single direction. The compact, lightweight panel is easy to remove.



Improved workability

- The indoor unit is equipped with a buffer tank, DHW connection 3-way valve*, as well as an expansion tank and backup heater
- This improves system reliability and ease of installation

*Wall-mounted only

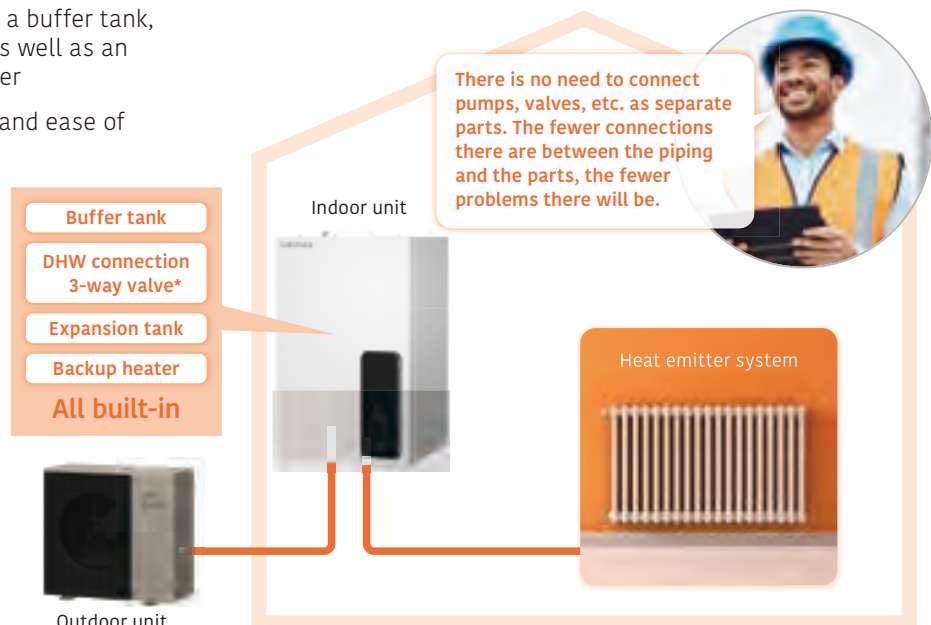

Useful Features

Features	Explanation
Quick recovery from defrosting	Maintains room temperature by boost start operation during defrosting
Auto changeover	When auto mode is selected, the system automatically switches between cooling and heating modes depending on the outside temperature.
2-zone independent control	2-zone independent control
Backup heater operation	Backup heater maintains a comfortable room temperature even when the outside temperature is low. It is intelligently controlled as a safety backup for very cold days and nights, and only operates when really needed.
Peak cut function	Sets the peak current value to reduce power consumption. Mode 1 -> 100% Mode 2 -> 75% Mode 3 -> 50% Mode 4 -> Almost 0%
Anti-Freezing function	When the outside temperature drops below a specified level, the compressor will self-activate and water will also be automatically circulated to prevent freezing.
Anti-Legionella function	Prevents the growth of Legionella bacteria in the DHW tank to supply safe and clean hot water at all times.
Emergency operation	If an outdoor unit fails to operate, a built-in backup heater or an external boiler is activated to supply an uninterrupted supply of hot water to the house.



AIR TO WATER

Indoor unit:
UTW-SCBEC

Outdoor unit:
WPEG050KRF / WPEG080KRF
WPEG100KRF



Control box
Single phase



Outdoor unit
Single phase
5 kW



Outdoor unit
Single phase
8/10 kW

Specifications

Model Name		Indoor unit		Control box					
		Outdoor unit		UTW-SCBEC		UTW-SCBEC		UTW-SCBEC	
				WPEG050KRF		WPEG080KRF		WPEG100KRF	
Capacity Range				5		8		10	
7°C/35°C floor heating * ¹	Heating capacity	kW		5.00		8.00		10.00	
	Input power		0.97		1.54		2.05		
	COP		5.15		5.19		4.88		
7°C/55°C radiator * ¹	Heating capacity	kW		5.00		8.00		10.00	
	Input power		1.64		2.62		3.36		
	COP		3.04		3.05		2.98		
-7°C/55°C radiator * ¹	Heating capacity	kW		4.80		7.50		8.50	
	Input power		2.25		3.50		3.97		
	COP		2.13		2.14		2.14		
35°C/18°C cooling mode * ¹	Cooling capacity	kW		5.45		7.79		9.40	
	Input power		1.25		1.69		2.40		
	EER		4.35		4.62		3.91		
Space heating characteristics* ²									
Temperature application			°C	55	35	55	35	55	35
Energy efficiency class				A++	A+++	A++	A+++	A++	A+++
Rated heat output (P _{rated})			kW	6	6	9	9	10	10
Seasonal space heating energy efficiency (η _s)			%	143	200	144	205	146	206
Annual energy consumption			kWh	3,110	2,364	4,880	3,571	5,480	4,018
Sound power level* ³ Outdoor unit			dB(A)	52	52	56	56	57	57
Indoor unit specifications									
Power source				Single phase, 230 V, 50 Hz					
Dimensions H × W × D			mm	483 × 370 × 222		483 × 370 × 222		483 × 370 × 222	
Weight (Net)			kg	10		10		10	
Outdoor unit specifications									
Power source				Single phase, 230 V, 50 Hz					
Current			Max.	A	14.6	19.1	20.6		
Water flow temperature range			Max.	°C	60	60	60		
Dimensions H × W × D			mm	798 × 1,080 × 480		1,008 × 1,080 × 480		1,008 × 1,080 × 480	
Weight (Net)			kg	85		109		109	
Refrigerant			Type (Global Warming Potential)	R32 (675)		R32 (675)		R32 (675)	
			Charge	kg	0.88	1.47	1.47		
Connection pipe			Diameter	Water	mm	Ø25.4	Ø25.4	Ø25.4	
Operating range			Heating	°C	-20 to 35	-20 to 35	-20 to 35	-20 to 35	

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.


Dimensions

(Unit: mm)


Control box:
UTW-SCBEC



Wall Mounted:
WSEP100KR3



DHW Integrated:
WGEP100KR3-19

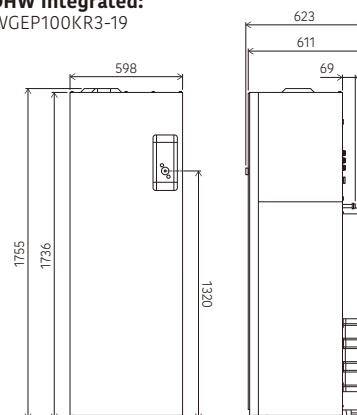

Indoor unit:
WSEP100KR3
WGEP100KR3-19


Outdoor unit:
WPEG050KRF / WPEG080KRF
WPEG100KRF



Wall Mounted
Single phase



DHW Integrated
Single phase

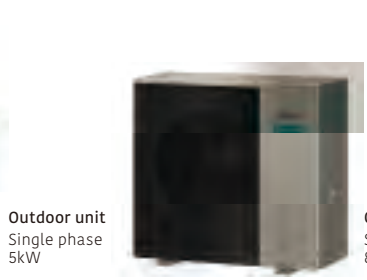

Outdoor unit
Single phase
5kW



Outdoor unit
Single phase
8/10 kW

Specifications


Model Name		Indoor unit	Wall Mounted						DHW Integrated						
			WSEP100KR3		WSEP100KR3		WSEP100KR3		WGEP100KR3-19		WGEP100KR3-19		WGEP100KR3-19		
		Outdoor unit	WPEG050KRF		WPEG080KRF		WPEG100KRF		WPEG050KRF		WPEG080KRF		WPEG100KRF		
Capacity Range			5		8		10		5		8		10		
7°C/35°C floor heating* ¹	Heating capacity		kW	5.00		8.00		10.00		5.00		8.00		10.00	
	Input power			1.00		1.57		2.13		1.00		1.57		2.13	
	COP			4.99		5.08		4.70		4.99		5.08		4.70	
7°C/55°C radiator* ¹	Heating capacity		kW	5.00		8.00		10.00		5.00		8.00		10.00	
	Input power			1.72		2.62		3.40		1.72		2.62		3.40	
	COP			2.91		3.05		2.94		2.91		3.05		2.94	
-7°C/55°C radiator* ¹	Heating capacity		kW	4.80		7.50		8.50		4.80		7.50		8.50	
	Input power			2.51		3.62		4.11		2.51		3.62		4.11	
	EER			1.91		2.07		2.07		1.91		2.07		2.07	
35°C/18°C cooling mode* ¹	Cooling capacity		kW	5.35		7.69		9.30		5.35		7.69		9.30	
	Input power			1.26		1.72		2.47		1.26		1.72		2.47	
	EER			4.23		4.47		3.77		4.23		4.47		3.77	
Space heating characteristics* ²															
Temperature application			°C	55	35	55	35	55	35	55	35	55	35	55	35
Energy efficiency class				A++	A+++	A++	A+++	A++	A+++	A++	A+++	A++	A+++	A++	A+++
Rated heat output (P _{rated})			kW	6	6	9	9	10	10	6	6	9	9	10	10
Seasonal space heating energy efficiency (η _s)			%	133	189	139	195	141	195	133	189	139	195	141	195
Annual energy consumption			kWh	3,355	2,503	5,078	3,764	5,685	4,269	3,355	2,503	5,078	3,764	5,685	4,269
Sound power level* ³ Outdoor unit			dB(A)	52	52	56	56	57	57	52	52	56	56	57	57
Indoor unit specifications															
Power source			Single phase, 230 V, 50 Hz						Single phase, 230 V, 50 Hz						
Dimensions H × W × D			mm	737 × 448 × 469		737 × 448 × 469		737 × 448 × 469		1755 × 598 × 623		1755 × 598 × 623		1755 × 598 × 623	
Weight (Net)			kg	34.0		34.0		34.0		130.0		130.0		130.0	
Water circulation			Min./Max.	l/min		8.5		14.5		14.5		8.5		14.5	
DHW tank volume			L	-		-		-		190		190		190	
Buffer tank capacity			L	16		16		16		16		16		16	
Expansion vessel capacity			L	12		12		12		12		12		12	
Water flow temperature range			Max.	°C		60		60		60		60		60	
Water pipe connection diameter			Flow/Return	mm		Ø19.05/Ø19.05		Ø19.05/Ø19.05		Ø19.05/Ø19.05		Ø19.05/Ø19.05		Ø19.05/Ø19.05	
Electrical heater capacity			Heating	kW	3.0		3.0		3.0		3.0		3.0		
			DHW		-		-		-		1.2		1.2		
Declared load profile				-	-		-		-		L		L		
Efficiency ηDHW			%	-	-		-		-		124		124		
Heating up time				-	-		-		-		1h45min		1h35min		
COP(EN16147)			-	-	-		-		-		3.10		3.10		
Outdoor unit specifications															
Power source			Single phase, 230 V, 50 Hz						Single phase, 230 V, 50 Hz						
Current			Max.	A		14.6		19.1		20.6		14.6		19.1	
Water flow temperature range			Max.	°C		60		60		60		60		60	
Dimensions H × W × D			mm	798 × 1,080 × 480		1,008 × 1,080 × 480		1,008 × 1,080 × 480		798 × 1,080 × 480		1,008 × 1,080 × 480		1,008 × 1,080 × 480	
Weight (Net)			kg	85		109		109		85		109		109	
Refrigerant			Type (Global Warming Potential)	R32 (675)		R32 (675)		R32 (675)		R32 (675)		R32 (675)		R32 (675)	
			Charge	kg		0.88		1.47		1.47		0.88		1.47	
Connection pipe			Diameter	mm		Ø25.4		Ø25.4		Ø25.4		Ø25.4		Ø25.4	
Operating range			Heating	°C		-20 to 35		-20 to 35		-20 to 35		-20 to 35		-20 to 35	

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.

Outdoor unit:
WPEG050KRF

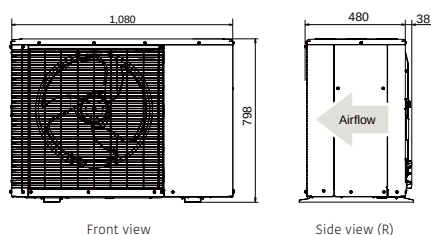

WPEG080KRF/WPEG100KRF

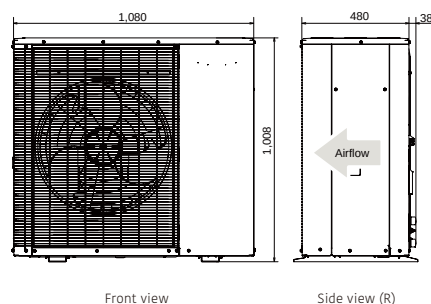



Split Type

Comfort series




Split Type

High Power series
Super High Power series

This is a split type that exchanges heat from air to water inside the indoor unit.

A wide range of products to suit regional characteristics, family structures, and usage patterns. We provide a variety of products to meet the needs of customers from the heating-centered high power series to the reasonably priced compact series.

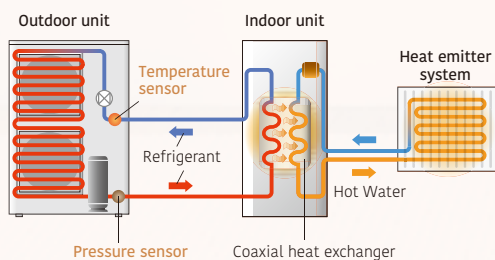

*Indoor unit : Wall mounted

High Energy Efficiency


All classes achieved top rank A+++* energy efficiency class.

For Outdoor unit



Twin-Rotary Compressor with Linear Control Injection Port


The compressor achieves a high condensing temperature without overheating the discharge gas temperature due to the Linear control injection process used during compression. This makes the condensing temperature higher than in a normal circuit. Higher water temperatures can be achieved by controlling the injection volume according to usage conditions.

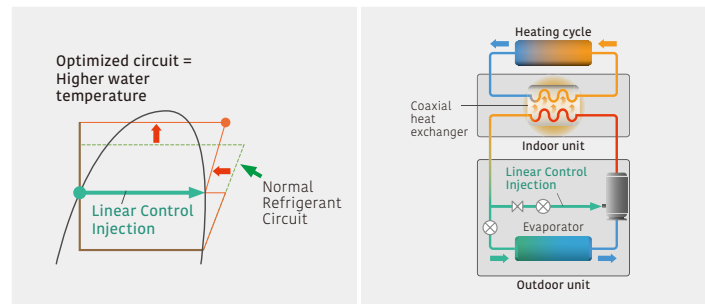

*High power and super high power only

For Indoor unit

High-durability coaxial heat exchanger

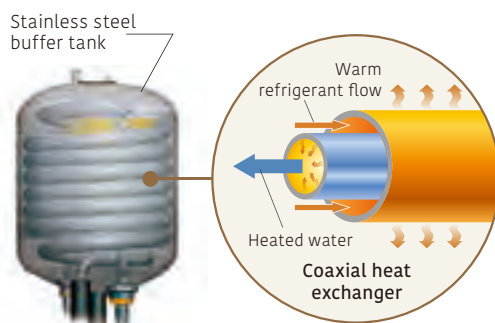

Stainless steel buffer tank

Heat exchange amount is 25% higher than the previous model. Energy-saving performance has also been improved.

The buffer tank has anti-corrosion protection thanks to stainless steel material.

Class A Pump

Energy-saving pump with the ability to adjust the flow rate and pressure to a constant level




Durability and Reliability

We take care to ensure that our products can be used by our customers for a long time. We have taken measures to reduce damage to our products even in the event of problems with the installation environment or during operation.



For Outdoor unit



Pressure switch

The pressure switch equipped on the refrigerant cycle protects the system from malfunction that may be caused by abnormal refrigerant pressure.




Silicon coating of PCBs

The silicon coating protects the PCBs and their components from damage caused by small animals living in the electrical box and salt.

2 Cylinder Rotary Compressor

Optimal bearings

Reduced stress on specific parts of the body reduces the risk of wear and tear. Reduced vibration during rotation reduces wear and fatigue damage, resulting in increased durability.

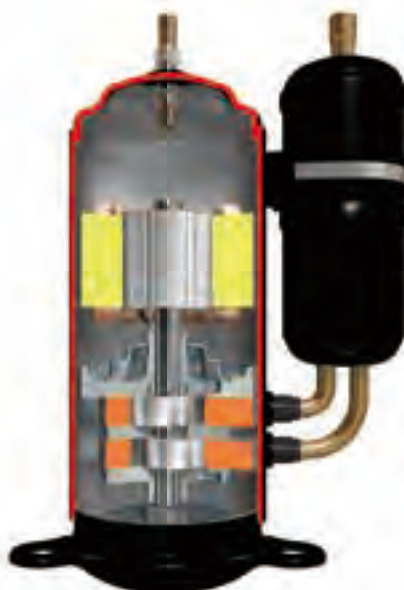

Coated vane

- Very high hardness and low coefficient of wear, providing excellent resistance to abrasion. Scientifically stable and highly resistant to a wide range of working fluids and environmental conditions, it protects vanes from corrosion and chemical degradation, contributing to longer service life.

Optimal lubricating oil


- Improves durability by preventing friction and heating of parts
- Contains rust inhibitors and antioxidants to protect metal parts from corrosion, which can cause failure and loss of performance.
- Reduces shock and vibration between parts, preventing oversteering of parts and increasing durability

Useful Features

Features	Explanation
Quick recovery from defrosting	Maintains room temperature by boost start operation during defrosting
Auto changeover	When cooling mode is selected, the system automatically switches between cooling and heating modes depending on the outside temperature.
2-zone independent control	2-zone independent control
Backup heater operation	Backup heater maintains a comfortable room temperature even when the outside temperature is low. It is intelligently controlled as a safety backup for very cold days and nights, and only operates when really needed.
Peak cut function	Sets the peak current value to reduce power consumption. Mode 1 -> 100% Mode 2 -> 75% Mode 3 -> 50% Mode 4 -> Almost 0%
Anti-Freezing function	When the outside temperature drops below a specified level, the compressor will self-activate and water will also be automatically circulated to prevent freezing.
Anti-Legionella function	Prevents the growth of Legionella bacteria in the DHW tank to supply safe and clean hot water at all times.
Emergency operation	If an outdoor unit fails to operate, a built-in backup heater or an external boiler is activated to supply an uninterrupted supply of hot water to the house.

Smart control

To meet the diverse needs of customers, we offer a variety of control options, such as individual control and remote control options.

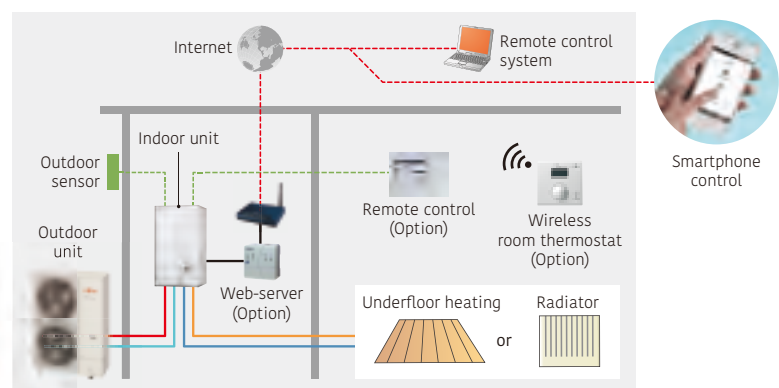

AIR TO WATER

Split Type

Wall Mounted type
Comfort series



A⁺⁺



A⁺⁺⁺

Max
55°C

High water flow temperature

The temperature of water flow is up to 55°C without a backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

Outdoor temp.
-10°C

Water temp.
55°C



Comfort series

High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class

A^{+++*}

*Temperature application: Heating temp. 35°C

Seasonal space heating energy efficiency (η_s)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

175%
(η_s) COP 4.74



Comfort series
5 kW class

177%
(η_s) COP 4.43



Comfort series
8 kW class

178%
(η_s) COP 4.50



Comfort series
10 kW class

Outdoor unit technology



5/6 kW



8 kW



10 kW



DC Fan Motor

High-performance, high-efficiency small DC fan motor mounted



DC Twin-Rotary Compressor

High-efficiency DC twin-rotary compressor



DC Inverter

DC inverter provides smooth water temperature control.

Indoor unit:

WSYA050ML3 / WSYA080ML3 / WSYA100ML3

Outdoor unit:

WOYA060KLT / WOYA080KLT / WOYA100KLT



Wall Mounted
Single phase



Outdoor unit
Single phase
5/6 kW



Outdoor unit
Single phase
8 kW



Outdoor unit
Single phase
10 kW

Specifications

Model Name		Indoor unit	WSYA050ML3		WSYA080ML3		WSYA080ML3		WSYA100ML3	
		Outdoor unit	WOYA060KLT		WOYA060KLT		WOYA080KLT		WOYA100KLT	
Capacity Range			5		6		8		10	
7°C/35°C floor heating *1	Heating capacity	kW	4.50		5.50		7.50		9.50	
	Input power		0.949		1.18		1.69		2.11	
	COP		4.74		4.65		4.43		4.50	
2°C/35°C floor heating *1	Heating capacity	kW	4.50		5.30		6.30		9.30	
	Input power		1.33		1.65		1.96		3.08	
	COP		3.39		3.22		3.21		3.02	
-7°C/35°C floor heating*1	Heating capacity	kW	4.40		5.00		5.70		8.90	
	Input power		1.59		1.90		2.13		3.36	
	COP		2.76		2.63		2.68		2.65	
-7°C/55°C Radiator*1	Heating capacity	kW	3.90		4.25		5.30		8.00	
	Input power		2.11		2.25		2.79		4.10	
	COP		1.85		1.89		1.90		1.95	
Space heating characteristics*2										
Temperature application		°C	55	35	55	35	55	35	55	35
Energy efficiency class			A++	A+++	A++	A+++	A++	A+++	A++	A+++
Rated heat output (P _{rated})		kW	5	5	5	6	6	7	8	9
Seasonal space heating energy efficiency (η _s)		%	125	175	125	175	128	177	130	178
Annual energy consumption		kWh	3,035	2,322	3,411	2,594	3,903	2,982	5,083	3,875
Sound power level*3	Indoor unit	dB(A)	40	-	40	-	40	-	40	-
	Outdoor unit		57	-	57	-	60	-	62	-
Indoor unit specifications										
Power source			Single phase, ~230 V, 50 Hz							
Dimensions H × W × D		mm	847 × 450 × 493		847 × 450 × 493		847 × 450 × 493		847 × 450 × 493	
Weight (Net)		kg	47		47		47		47	
Water circulation		Min./Max.	L/min		7.6/22.0		8.5/22.0		10.0/22.0	
Buffer tank capacity		L	16		16		16		16	
Expansion vessel capacity		L	8		8		8		8	
Water flow temperature range		Max.	°C		55		55		55	
Water pipe connection diameter		Flow/Return	mm		Ø25.4/Ø25.4		Ø25.4/Ø25.4		Ø25.4/Ø25.4	
Electrical heater capacity		Heating	kW		3.0		3.0		3.0	
Outdoor unit specifications										
Power source			Single phase, ~230 V, 50 Hz							
Current		Max.	A		13.0		18.0		19.0	
Dimensions H × W × D		mm	632 × 799 × 290		632 × 799 × 290		716 × 820 × 315		998 × 940 × 320	
Weight (Net)		kg	39		39		42		62	
Refrigerant		Type (Global Warming Potential)	R32 (675)		R32 (675)		R32 (675)		R32 (675)	
		Charge	kg		0.97		1.02		1.63	
Additional refrigerant charge		g/m	25		25		25		20	
Connection pipe	Diameter	Liquid	mm		6.35		6.35		9.52	
		Gas	mm		12.70		12.70		15.88	
	Length	Min./Max.	m		3/30		3/30		3/30	
	Length (Pre-charge)	m		15		15		15		20
Operating range	Heating	Max.	m		20		20		20	
		°C	-20 to 35		-20 to 35		-20 to 35		-20 to 35	

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/


*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.

Dimensions


(Unit: mm)

Outdoor Unit:

WOYA060KLT




WOYA100KLT

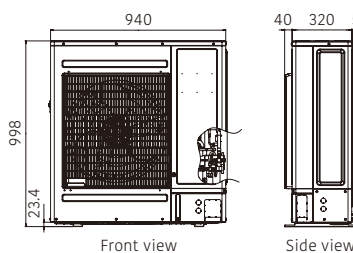


Indoor Unit:

WSYA050ML3/WSYA080ML3/WSYA100ML3



WOYA080KLT



AIR TO WATER

Split Type

DHW Integrated type
Comfort series



A⁺⁺



A⁺⁺⁺

Max
55°C

High water flow temperature

The temperature of water flow is up to 55°C without a backup heater. Hot water supply temperature can be maintained even at -10°C outdoor temperature.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

Outdoor temp.
-10°C

Water temp.
55°C



Comfort series

High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class

A^{+++*}

*Temperature application: Heating temp. 35°C

Seasonal space heating energy efficiency (η_s)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

175%
(η_s) COP 4.74



Comfort series
5 kW class

177%
(η_s) COP 4.43



Comfort series
8 kW class

178%
(η_s) COP 4.50



Comfort series
10 kW class

Outdoor unit technology



5/6 kW



8 kW



10 kW



DC Fan Motor

High-performance, high-efficiency small DC fan motor mounted



DC Twin-Rotary Compressor

High-efficiency DC twin-rotary compressor



DC Inverter

DC inverter provides smooth water temperature control.

Indoor unit:

WGYA050ML3 / WGYA080ML3 / WGYA100ML3

Outdoor unit:

WOYA060KLT / WOYA080KLT / WOYA100KLT



DHW Integrated Single phase



Outdoor unit Single phase 5/6 kW



Outdoor unit Single phase 8 kW



Outdoor unit Single phase 10 kW

Specifications

Model Name	Indoor unit	WGYA050ML3	WGYA080ML3	WGYA080ML3	WGYA100ML3
	Outdoor unit	WOYA060KLT	WOYA060KLT	WOYA080KLT	WOYA100KLT
Capacity range		5	6	8	10
7°C/35°C floor heating *1	Heating capacity	4.50	5.50	7.50	9.50
	Input power	0.949	1.18	1.69	2.11
	COP	4.74	4.65	4.43	4.50
2°C/35°C floor heating *1	Heating capacity	4.50	5.30	6.30	9.30
	Input power	1.33	1.65	1.96	3.08
	COP	3.39	3.22	3.21	3.02
-7°C/35°C floor heating*1	Heating capacity	4.40	5.00	5.70	8.90
	Input power	1.59	1.90	2.13	3.36
	COP	2.76	2.63	2.68	2.65
-7°C/55°C Radiator*1	Heating capacity	3.90	4.25	5.30	8.00
	Input power	2.11	2.25	2.79	4.10
	COP	1.85	1.89	1.90	1.95
Space heating characteristics*2					
Temperature application	°C	55	35	55	35
Energy efficiency class		A++	A+++	A++	A+++
Rated heat output (P _{rated})	kW	5	5	6	9
Seasonal space heating energy efficiency (η _s)	%	125	175	125	175
Annual energy consumption	kWh	3,035	2,322	3,411	2,594
Sound power level*3	Indoor unit	40	-	40	-
	Outdoor unit	57	-	60	-
Domestic hot water characteristics*2					
Load profile		L	L	L	L
Energy efficiency class		A+	A+	A+	A+
Energy efficiency (η _{wh})	%	130	130	130	130
Annual electricity consumption	kWh	793	793	793	793
Indoor unit specifications					
Power source		Single phase, ~230 V, 50 Hz			
Dimensions H × W × D	mm	1,863 × 648 × 700	1,863 × 648 × 700	1,863 × 648 × 700	1,863 × 648 × 700
Weight (Net)	kg	145	145	145	145
Water circulation	Min./Max.	L/min	7.6/22.0	8.5/22.0	10.0/30.0
DHW tank volume	L	190	190	190	190
Electrical heater capacity	Heating	3.0	3.0	3.0	3.0
	DHW	1.5	1.5	1.5	1.5
Buffer tank capacity	L	16	16	16	16
Expansion vessel capacity	L	8	8	8	8
Water flow temperature range	Max.	°C	55	55	55
Water pipe connection diameter	Flow/Return	mm	Ø25.4/Ø25.4	Ø25.4/Ø25.4	Ø25.4/Ø25.4
Hot water pipe connection diameter		mm	Ø19.05	Ø19.05	Ø19.05
Outdoor unit specifications					
Power source		Single phase, ~230 V, 50 Hz			
Current	Max.	A	13.0	13.0	18.0
Dimensions H × W × D	mm	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	998 × 940 × 320
Weight (Net)	kg	39	39	42	62
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)
	Charge	kg	0.97	0.97	1.63
Additional refrigerant charge		g/m	25	25	20
Connection pipe	Diameter	Liquid	6.35	6.35	6.35
		Gas	12.70	12.70	15.88
	Length	Min./Max.	3/30	3/30	3/30
	Length (Pre-charge)	m	15	15	20
Height difference	Max.	m	20	20	20
	Heating	°C	-20 to 35	-20 to 35	-20 to 35

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/


*3: The sound power level values are based on EN12102 standard measurements under EN14825 standard conditions.

Dimensions


(Unit: mm)

Outdoor Unit:

WOYA060KLT




WOYA100KLT

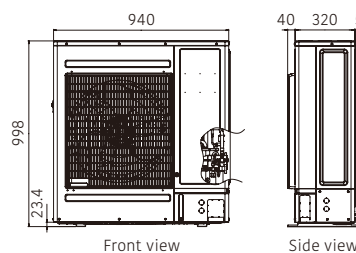


Indoor Unit:

WGYA050ML3/WGYA080ML3/WGYA100ML3

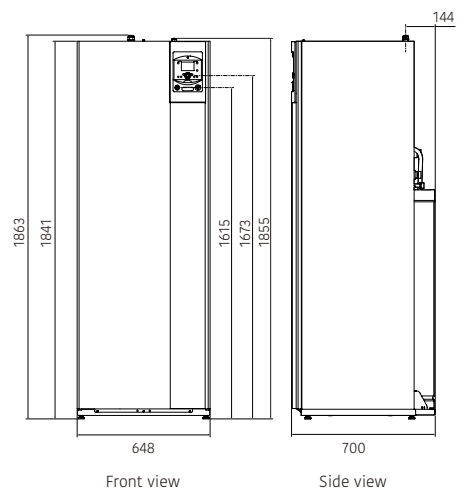

WOYA080KLT



AIR TO WATER

Split Type


Wall Mounted type
High Power series



High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

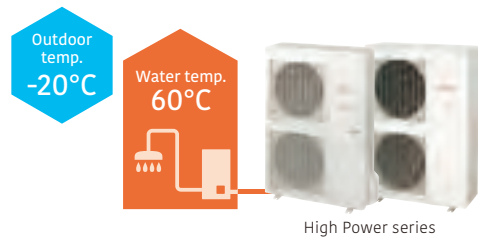

High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency class




*Temperature application: Heating temp. 35°C

Seasonal space heating energy efficiency (η_s)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C



Single phase
11 kW class



3-phase
11 kW class



Indoor unit:

WSYG140DG6/

[3-phase] WSYK160DG9

Outdoor unit:

WOYG112LHT / WOYG140LCTA

[3 phase] WOYK112LCTA /

WOYK140LCTA /WOYK160LCTA



Wall Mounted
Single phase/
3-phase



Outdoor unit
Single phase
11/14 kW



Outdoor unit
3-phase
11/14/16 kW

Specifications

Model Name	Indoor unit	WSYG140DG6	WSYG140DG6	WSYK160DG9	WSYK160DG9	WSYK160DG9
	Outdoor unit	WOYG112LHT	WOYG140LCTA	WOYK112LCTA	WOYK140LCTA	WOYK160LCTA
Capacity range		11	14	11	14	16
7°C/35°C floor heating *1	Heating capacity	10.80	13.50	10.80	13.50	15.17
	Input power	2.54	3.23	2.51	3.20	3.70
	COP	4.25	4.18	4.30	4.22	4.10
2°C/35°C floor heating *1	Heating capacity	10.77	12.00	10.77	13.00	13.50
	Input power	3.44	3.87	3.40	4.15	4.34
	COP	3.13	3.10	3.17	3.13	3.11
-7°C/35°C floor heating*1	Heating capacity	10.38	11.54	10.38	12.20	13.50
	Input power	4.32	5.08	4.28	5.13	5.40
	COP	2.40	2.27	2.43	2.38	2.50
-7°C/55°C Radiator*1	Heating capacity	7.57	9.20	9.27	10.10	11.00
	Input power	4.57	5.08	5.09	5.65	6.29
	COP	1.66	1.81	1.82	1.79	1.75

Space heating characteristics*2

Temperature application	°C	55	35	55	35	55	35	55	35	55	35
Energy efficiency class		A+	A++	A+	A+	A+	A++	A+	A++	A+	A+
Rated heat output (P _{rated})	kW	9	11	11	13	9	11	11	13	13	14
Seasonal space heating energy efficiency (η _s)	%	112	151	113	148	112	154	117	150	117	149
Annual energy consumption	kWh	6,704	6,062	8,041	6,824	6,669	5,930	7,803	6,738	9,062	7,408
Sound power level	Indoor unit	46		46		46		46		46	
	Outdoor unit	68		69		69		70		71	

Indoor unit specifications

Power source			Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz			
Dimensions H × W × D			mm	800 × 450 × 457			800 × 450 × 457		
Weight (Net)			kg	42			42		
Water circulation		Min./Max.	L/min	19.5/39.0	24.4/48.7	19.5/39.0	24.4/48.7	27.4/54.8	
Buffer tank capacity			L	16			16		
Expansion vessel capacity			L	8			8		
Water flow temperature range		Max.	°C	60			60		
Water pipe connection diameter			Flow/Return	mm			mm		
Electrical heater capacity			heating	kW			kW		

Outdoor unit specifications

Power source				Single phase, ~230 V, 50 Hz		3-phase, ~400 V, 50 Hz		
Current		Max.	A	22.0	25.0	9.0	9.5	10.5
Dimensions H × W × D			mm	1,290 × 900 × 330				
Weight (Net)			kg	92		99		
Refrigerant		Type (Global Warming Potential)	R410A (2,088)					
		Charge	kg	2.50				
Additional refrigerant charge			g/m	50				
Connection pipe	Diameter	Liquid	mm	Ø9.52				
		Gas		Ø15.88				
	Length	Min./Max.	m	5/20				
	Length (Pre-charge)		m	15				
Operating range	Height difference	Max.	m	15				
		Heating	°C	-25 to 35				

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

Dimensions

(Unit: mm)

Outdoor Unit:




Single phase: WOYG112LHT/WOYG140LCTA

3 phase: WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

Indoor Unit:

Single phase: WSYG140DG6

3-phase: WSYK160DG9

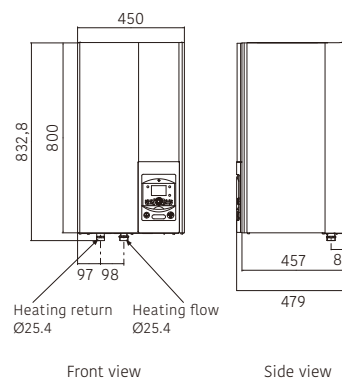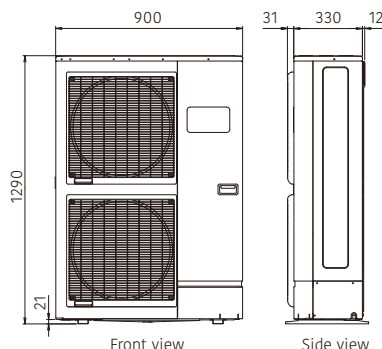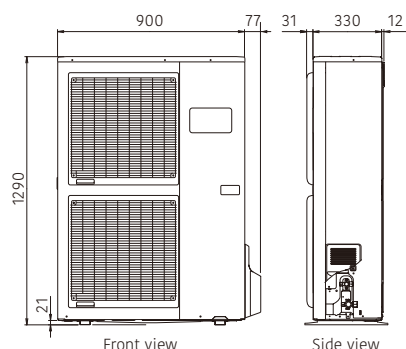

Split Type

DHW Integrated type
High Power series



A⁺




A⁺⁺

Max
60°C

High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

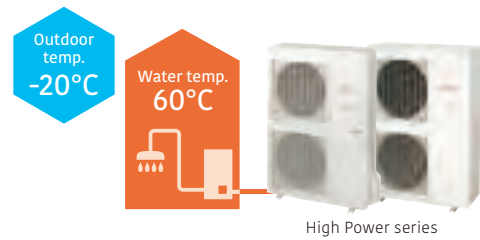

High COP

Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.


Energy efficiency
class



*Temperature application: Heating temp. 35°C


Seasonal space heating energy efficiency (η_s)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C

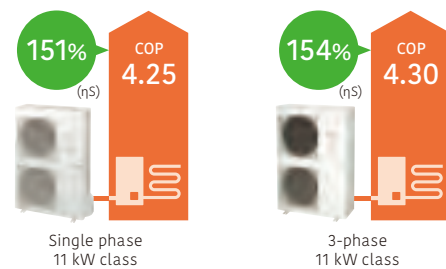

Optimized refrigerant cycle operation

The high power series deliver high performance and efficiency with twin sensors and hot water heating technology.

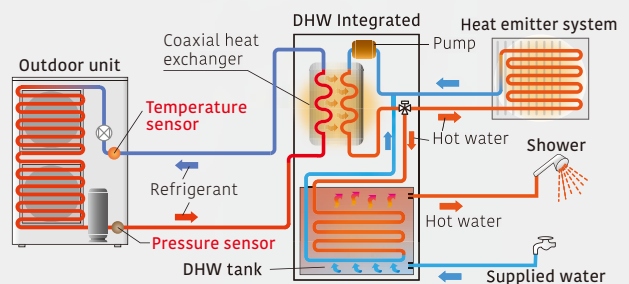

Indoor unit:

**WGYG140DG6/
[3-phase]WGYK160DG9**

Outdoor unit:

**WOYG112LHT / WOYG140LCTA
[3 phase] WOYK112LCTA / WOYK140LCTA /
WOYK160LCTA**



DHW Integrated
Single phase/
3-phase



Outdoor unit
Single phase
11/14 kW



Outdoor unit
3-phase
11/14/16 kW

Specifications

Model Name	Indoor unit		WGYG140DG6		WGYG140DG6		WGYK160DG9		WGYK160DG9		WGYK160DG9	
	Outdoor unit		WOYG112LHT		WOYG140LCTA		WOYK112LCTA		WOYK140LCTA		WOYK160LCTA	
Capacity range			11		14		11		14		16	
7°C/35°C floor heating * ¹	Heating capacity	kW	10.80		13.50		10.80		13.50		15.17	
	Input power		2.54		3.23		2.51		3.20		3.70	
	COP		4.25		4.18		4.30		4.22		4.10	
2°C/35°C floor heating * ¹	Heating capacity	kW	10.77		12.00		10.77		13.00		13.50	
	Input power		3.44		3.87		3.40		4.15		4.34	
	COP		3.13		3.10		3.17		3.13		3.11	
-7°C/35°C floor heating* ¹	Heating capacity	kW	10.38		11.54		10.38		12.20		13.50	
	Input power		4.32		5.08		4.28		5.13		5.40	
	COP		2.40		2.27		2.43		2.38		2.50	
-7°C/55°C Radiator* ¹	Heating capacity	kW	7.57		9.20		9.27		10.10		11.00	
	Input power		4.57		5.08		5.09		5.65		6.29	
	COP		1.66		1.81		1.82		1.79		1.75	
Space heating characteristics* ²												
Temperature application		°C	55	35	55	35	55	35	55	35	55	35
Energy efficiency class			A+	A++	A+	A+	A+	A++	A+	A++	A+	A+
Rated heat output (P _{rated})		kW	9	11	11	13	9	11	11	13	13	14
Seasonal space heating energy efficiency (η _s)		%	112	151	113	148	112	154	117	150	117	149
Annual energy consumption		kWh	6,704	6,062	8,041	6,824	6,669	5,930	7,803	6,738	9,062	7,408
Sound power level	Indoor unit	dB(A)	46		46		46		46		46	
	Outdoor unit		68		69		69		68		71	
Domestic hot water characteristics* ²												
Load profile			L									
Energy efficiency class			A									
Energy efficiency(η _{dw})		%	88									
Annual electricity consumption		kWh	1166									
Indoor unit specifications												
Power source			Single phase, ~230 V, 50 Hz				3-phase, ~400 V, 50 Hz					
Dimensions H × W × D		mm	1,840 × 648 × 698									
Weight (Net)		kg	152									
Water circulation		Min./Max.	19.5/39.0		24.4/28.7		19.5/39.0		24.4/48.7		27.4/54.8	
DHW tank volume		L	190									
Electrical heater capacity	Heating	kW	6				9					
	DHW		1.5									
Buffer tank capacity		L	16									
Expansion vessel capacity		L	12									
Water flow temperature range		Max.	60									
Water pipe connection diameter		Flow/Return	mm		Ø25.4/Ø25.4							
Hot water pipe connection diameter		mm	Ø19.05									
Outdoor unit specifications												
Power source			Single phase, ~230 V, 50 Hz				3-phase, ~400 V, 50 Hz					
Current		Max.	A		22.0		25.0		9.0		9.5	
Dimensions H × W × D		mm	1,290 × 900 × 330									
Weight (Net)		kg	92				99					
Refrigerant		Type (Global Warming Potential)	R410A (2,088)									
Charge		kg	2.50									
Additional refrigerant charge		g/m	50									
Connection pipe	Diameter	Liquid	mm		Ø9.52							
		Gas	mm		Ø15.88							
	Length	Min./Max.	m	5/20								
	Length (Pre-charge)	m	15									
Height difference	Max.	m	15									
	Heating	°C	-25 to 35									

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.

*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

Dimensions

(Unit: mm)




Outdoor Unit:

Single phase: WOYG112LHT/WOYG140LCTA

3 phase: WOYK112LCTA/WOYK140LCTA/WOYK160LCTA

Indoor Unit:

Single phase: WGYG140DG6
3-phase: WGYK160DG9

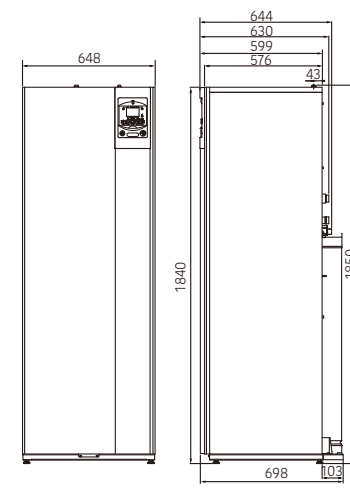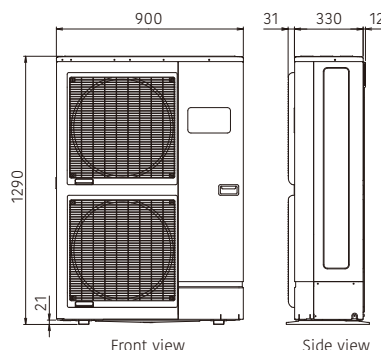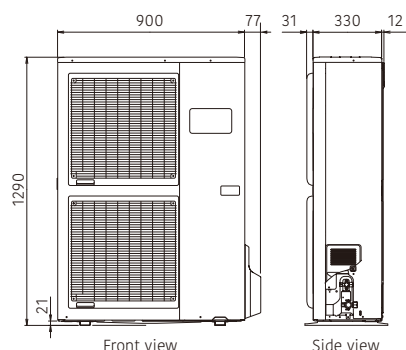

AIR TO WATER

Split Type

Wall Mounted type
Super High Power series



A++




A++

Max
60°C

High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C. The system can supply 55°C water without a backup heater at an outdoor temperature of -22°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

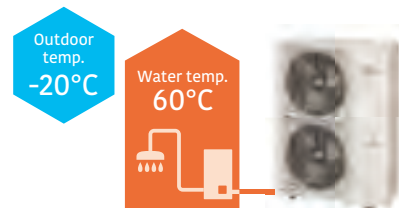

Super High Power series

High COP


Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency
class



Seasonal space heating energy efficiency (η_s)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C



Single phase
16 kW class

Operating range extended to -25°C

Operating range improved down to -25°C outdoor temperature



Indoor unit:
WSYG160DJ6 / [3-phase] WSYK170DJ9
Outdoor unit:
WOYG160LJL
[3-phase] WOYK150LJL / WOYK170LJL



Wall Mounted
Single phase/
3-phase



Outdoor unit
Single phase 16 kW
3-phase 15/17 kW

Specifications

Model Name		Indoor unit		WSYG160DJ6		WSYK170DJ9		WSYK170DJ9		
		Outdoor unit		WOYG160LJL		WOYK150LJL		WOYK170LJL		
Capacity range				16		15		17		
7°C/35°C floor heating * ¹	Heating capacity	kW	16.00		15.00		17.00			
	Input power		3.86		3.46		4.10			
	COP		4.15		4.33		4.15			
2°C/35°C floor heating * ¹	Heating capacity	kW	13.30		13.20		13.50			
	Input power		4.25		4.06		4.27			
	COP		3.13		3.25		3.16			
-7°C/35°C floor heating* ¹	Heating capacity	kW	14.50		13.20		15.00			
	Input power		5.27		4.55		5.32			
	COP		2.75		2.90		2.82			
-7°C/55°C Radiator* ¹	Heating capacity	kW	10.90		13.20		14.20			
	Input power		5.89		6.77		7.40			
	COP		1.85		1.95		1.92			
Space heating characteristics* ²										
Temperature application			°C	55	35	55	35	55	35	
Energy efficiency class				A++	A++	A++	A++	A++	A++	
Rated heat output (P _{rated})			kW	14	16	16	17	17	18	
Seasonal space heating energy efficiency (η _s)			%	125	163	130	164	130	161	
Annual energy consumption			kWh	8,757	8,014	9,915	8,606	10,232	9,059	
Sound power level	Indoor unit	dB(A)	45	45	45	45	45	45		
	Outdoor unit		67	66	67	66	67	68		
Indoor unit specifications										
Power source			Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz				
Dimensions H × W × D			mm	805 × 450 × 471			805 × 450 × 471			
Weight (Net)			kg	52.5			52.5			
Water circulation			Min./Max.	L/min	26.4/57.8			24.0/54.2		
Buffer tank capacity			L	22			22			
Expansion vessel capacity			L	10			10			
Water flow temperature range			Max.	°C	60			60		
Water pipe connection diameter			Flow/Return	mm	Ø25.4/Ø25.4			Ø25.4/Ø25.4		
Electrical heater capacity			Heating	kW	6.0 (3.0 kW × 2 pcs.)			9.0 (3.0 kW × 3 pcs.)		
Outdoor unit specifications										
Power source			Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz				
Current			Max.	A	28.0			14.0		
Dimensions H × W × D			mm	1,428 × 1,080 × 480			1,428 × 1,080 × 480			
Weight (Net)			kg	137			138			
Refrigerant			Type (Global Warming Potential)	R410A (2,088)						
			Charge	kg	3.80			3.80		
Additional refrigerant charge			g/m	50			50			
Connection pipe	Diameter	Liquid	mm	Ø9.52			Ø9.52			
		Gas	mm	Ø15.88			Ø15.88			
	Length	Min./Max.	m	5/30			5/30			
	Length (Pre-charge)		m	15			15			
Height difference			Max.	m	25/15 (Outdoor unit: Upper/Lower)					
Operating range			Heating	°C	-25 to 35		-25 to 35		-25 to 35	

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

Dimensions

(Unit: mm)


Outdoor Unit:

Single phase: WOYG160LJL
3-phase: WOYK150LJL/WOYK170LJL

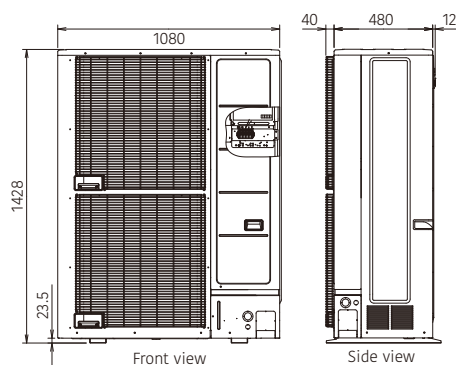

Indoor Unit:

Single phase: WSYG160DJ6
3-phase: WSYK170DJ9

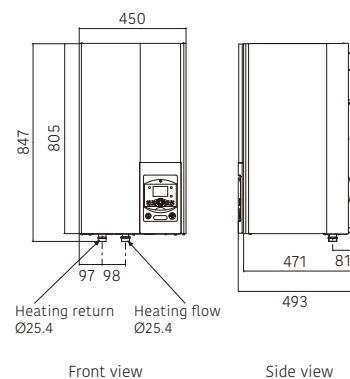

AIR TO WATER

Split Type

DHW Integrated type
Super High Power series



A++




A++

Max
60°C

High water flow temperature

The temperature of water flow can be maintained at 60°C without using a backup heater, even when the outdoor temperature drops to -20°C. The system can supply 55°C water without a backup heater at an outdoor temperature of -22°C.

* If you want to raise the temperature of the water supply to above the maximum temperature, use a backup heater to supplement the primary heater.

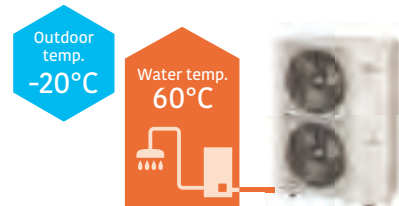

Super High Power series

High COP


Heat pumps of ATW Systems work more efficiently and consume less energy than conventional heating systems.

Energy efficiency
class



Seasonal space heating energy efficiency (η_s)

Conditions: Outdoor Temp. 7°C Heating Temp. 35°C



Single phase
16 kW class

Operating range extended to -25°C

Operating range improved down to -25°C outdoor temperature



Stylish space saving solution with
**Built-in High-performance
DHW tank 190 L**



- Coil heat exchanger optimizes DHW supply performance.
- Temperature rises quickly due to the large surface of the exchanger.

Indoor unit:
WGYG160DJ6 / [3-phase] WGYK170DJ9
Outdoor unit:
WOYG160LJL
[3-phase] WOYK150LJL / WOYK170LJL



DHW Integrated
Single phase/
3-phase



Outdoor unit
Single phase 16 kW
3-phase 15/17 kW

Specifications

Model Name		Indoor unit	WGYG160DJ6		WGYK170DJ9		WGYK170DJ9				
		Outdoor unit	WOYG160LJL		WOYK150LJL		WOYK170LJL				
Capacity range			16		15		17				
7°C/35°C floor heating * ¹	Heating capacity	kW	16.00		15.00		17.00				
	Input power		3.86		3.46		4.10				
	COP		4.15		4.33		4.15				
2°C/35°C floor heating * ¹	Heating capacity	kW	13.30		13.20		13.50				
	Input power		4.25		4.06		4.27				
	COP		3.13		3.25		3.16				
-7°C/35°C floor heating* ¹	Heating capacity	kW	14.50		13.20		15.00				
	Input power		5.27		4.55		5.32				
	COP		2.75		2.90		2.82				
-7°C/55°C Radiator* ¹	Heating capacity	kW	10.90		13.20		14.20				
	Input power		5.89		6.77		7.40				
	COP		1.85		1.85		1.92				
Space heating characteristics** ²											
Temperature application		°C	55		35		55		35		
Energy efficiency class			A++		A++		A++		A++		
Rated heat output (P _{rated})		kW	14		16		16		17		
Seasonal space heating energy efficiency (η _s)		%	125		163		130		164		
Annual energy consumption		kWh	8,757		8,014		9,915		8,606		
Sound power level	Indoor unit	dB(A)	45		45		45		45		
	Outdoor unit		67		66		67		66		
Domestic hot water characteristics** ²											
Load profile			L								
Energy efficiency class			A								
Energy efficiency (η _{wh})		%	109								
Annual electricity consumption		kWh	941								
Indoor unit specifications											
Power source			Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz					
Dimensions H × W × D		mm	1,841 × 648 × 698								
Weight (Net)		kg	166								
Water circulation		Min./Max.	L/min			26.4/57.8		24.0/54.2		27.3/61.4	
DHW tank volume		L	190								
Electrical heater capacity	Heating	kW	6.0 (3.0 kW × 2 pcs.)			9.0 (3.0 kW × 3 pcs.)					
	DHW		1.5			1.5					
Buffer tank capacity		L	22								
Expansion vessel capacity		L	12								
Water flow temperature range		Max.	°C								
Water pipe connection diameter		Flow/Return	mm			Ø25.4/Ø25.4					
Hot water pipe connection diameter		mm	Ø19.05								
Outdoor unit specifications											
Power source			Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz					
Current		Max.	A			28.0			14.0		
Dimensions H × W × D		mm	1,428 × 1,080 × 480			137			1,428 × 1,080 × 480		
Weight (Net)		kg	137			138			138		
Refrigerant	Type (Global Warming Potential)		R410A (2,088)			R410A (2,088)					
	Charge	kg	3.80			3.80					
Additional refrigerant charge		g/m	50			50					
Connection pipe	Diameter	Liquid	mm	Ø9.52			Ø9.52				
		Gas		Ø15.88			Ø15.88				
	Length	Min./Max.	m	5/30			5/30				
		Length (Pre-charge)	m	15			15				
Operating range	Height difference	Max.	m	25/15 (Outdoor unit: Upper/Lower)			25/15 (Outdoor unit: Upper/Lower)				
		Heating	°C	-25 to 35			-25 to 35				

*1: Heating capacity, input power, and COP are measured using the EN14511 standard. Actual usage environments, such as the operating modes of the heating equipment, room temperature, and controller settings, may cause differences in values between those listed in the catalog and the actual performance characteristics.


*2: Information about ErP can be downloaded from our website at www.fujitsu-general.com/global/support/downloads/search/

Dimensions

(Unit: mm)


Outdoor Unit:

Single phase: WOYG160LJL
 3-phase: WOYK150LJL/WOYK170LJL

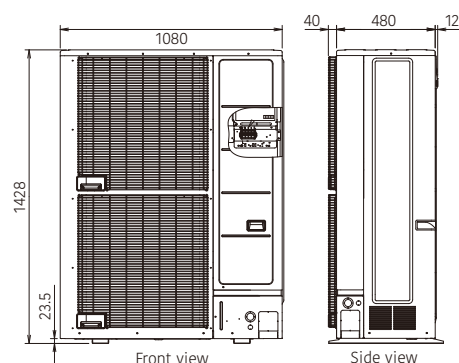

Indoor Unit:

Single phase: WGYG160DJ6
 3-phase: WGYK170DJ9

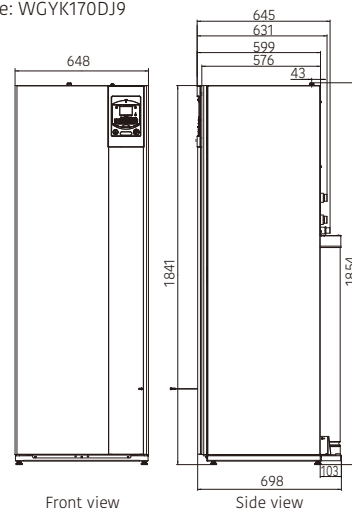

Indoor Units

Type-A

Type-B

Selecting the indoor units


- This is a device for storing hot water and circulating it to housing equipment.
- Selection criteria for the indoor unit is which housing equipment it will be connected to, such as a radiator or shower.
- Indoor unit you choose will also depend on whether you already own devices such as a pump or tank.



Radiator, Fan coil



Shower, Bath



Under floor heating



Domestic hot water



What Each Indoor Unit Can Do



Indoor unit control box*

If you want to update your system by reusing your existing pump and buffer tank, etc., you can do so by installing only the control box.



Indoor unit Wall mounted

Stands for preparation of heating water for under floor heating and radiators. It can optionally operate with domestic hot water tank.



Indoor unit Domestic Hot Water integrated

Can be used with a variety of heating systems, including under floor heating and radiators. Space saving heating and DHW supply in a single indoor unit.

*The control box can only be selected for Monobloc outdoor units.

Types of Indoor Units



Compatibility
for Monobloc type Comfort series



Indoor unit type	Control box	Wall mounted	DHW integrated
Housing Equipment			
Under floor heating	○	●	●
Radiator	○	●	●
Fan coil	○	●	●
Bath	○	○	●
Shower	○	○	●
Hot Water	○	○	●



Compatibility
for Split type
Comfort series, High power series
Super high power series



Indoor unit type	Wall mounted	DHW integrated
Housing Equipment		
Under floor heating	●	●
Radiator	●	●
Fan coil	●	●
Bath	○	●
Shower	○	●
Hot water	○	●

● : It can be used by constructing a system using options and carrying out water piping work.

○ : It can be used by constructing a system using options and carrying out water piping work, by reusing (or locally procuring) existing pumps and tanks, etc.

Housing Equipment requires the preparation of separately sold products.


Comfort Control

Useful Features

Flow temperature control with weather compensation

Automatic heating curve control

Automatic temperature regulation according to heating curve (depending on heating terminal and outdoor temperature)

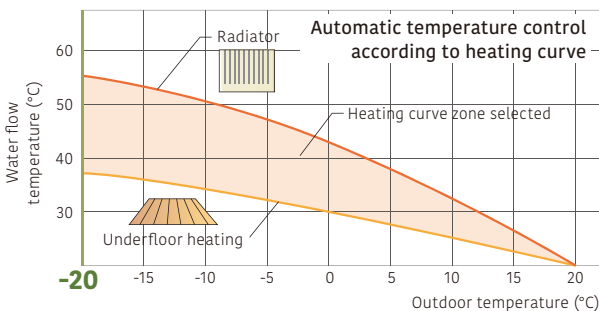

Auto changeover

When Auto mode is selected, the system automatically switches between cooling and heating modes depending on the outdoor temperature to serve as an all-season air conditioner.



Quick recovery from defrosting


Maintains room temperature by boost start operation during defrosting.

2-zone independent control

2-zone independent control (For example, the individual control of 2 underfloor heating zones or the combination of 1 underfloor heating zone and 1 radiator zone)^{*1*2}

^{*1}: Optional parts such as 2-zone kits, 3-zone kits, and thermostats are required

^{*2}: 3 Zones can be controlled in the Control Box



Backup heater operation

Backup heater maintains a comfortable room temperature even when the outside temperature is low. The backup heater is intelligently controlled as a safety backup for very cold days and nights, and only operates when really needed.

Controller with a clear color display and simple icons for easy function setting

Color display

Shows all the information items related to the operation mode:

Wi-Fi WLAN Connectivity / Operation / Pressure / Set temperature (DHW/Flow) Clock / Message / Service maintenance

Operation indicator
Fixed white: Normal operation
Flashing orange: Error


Menu access button

Navigation knob:
Rotation: Menu navigation
Press: Validation

Back button



Main operation flow and settings for installers and end users

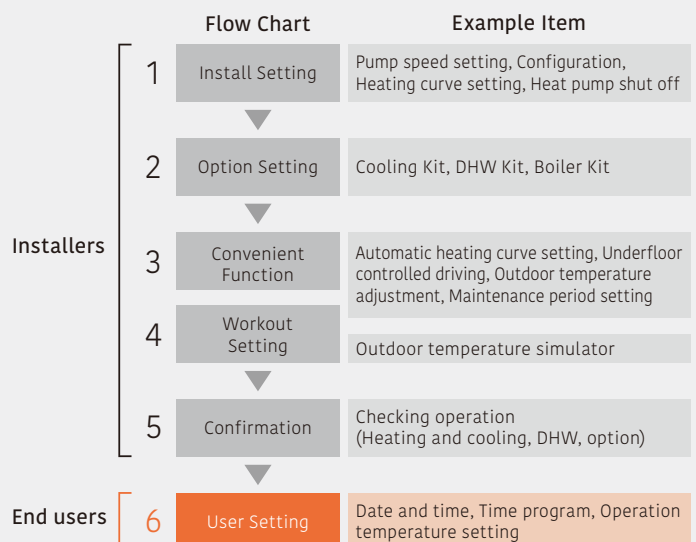

Energy Saving

Away mode

It will set heating and DHW mode to the frost protection* during the selected period:

-If you activate away mode on HMI: You can choose start and end time/date.

-If you activate away mode on Room thermostat (option): You can choose start and end time/date, as well as room setpoint during away period.

*: The protection mode automatically prevents an excessively sharp drop in room temperature.

Safety Features

Anti-freeze function

When the outside temperature drops below a specified level, the outdoor unit water pump will self-activate and water will also be automatically circulated to prevent freezing.

Easy Installation & Maintenance

- All hydraulic safety and control components are built in with no additional selection required.
- Easy access for maintenance
- Refrigerant pump down operation

Error and Maintenance Alarm

Enables quick error-handling services and maintenance



Error



Warning



Maintenance Support

Diagnostics functions for troubleshooting



Error display



In the event of an error, please note down the number and consult your heating engineer.

Easy to set up

Easy Start

Choose language, set date and time. Answer questions from Easy Start.



Remote connectivity and control

Via app "Cozytough", you can manage and control of electric heaters, electric water heaters, heat pump water heaters, heat pumps.

* Cozytough is a service of Group Atlantic



Type-A

Optional Parts & Control Overview

To meet the diverse needs of customers, we offer a variety of control options, such as individual control and remote control options.

for Locally units



UTW-KZSXQ

Second Circuit Kit

It can supply hot water at different temperatures to each two types of heating equipment, such as radiators and underfloor heating.



UTW-KZC2XQ



(x1)



UTW-KZDXQ

Boiler Connection Kit

It can build hybrid systems using both boilers and heat pumps. Boiler and heat pumps are switched according to outside air temperature.



UTW-KBCXQ

for DHW



UTW-KDWXQ



UTW-KDWCXQ

DHW Kit

Required to connect locally purchased DHW tanks to air to water.



DHW tank

200 Liters: UTW-T20AXH / UTW-T20BXH
300 Liters: UTW-T30AXH / UTW-T30BXH
The BXH series is a more efficient tank than the AXH series.



DHW Expansion Kit

UTW-KDEXQ


The expansion vessel(18L) for connection to DHW water piping.

Service & Maintenance Tool

Service Monitor Tool

UTY-ASSXZ1



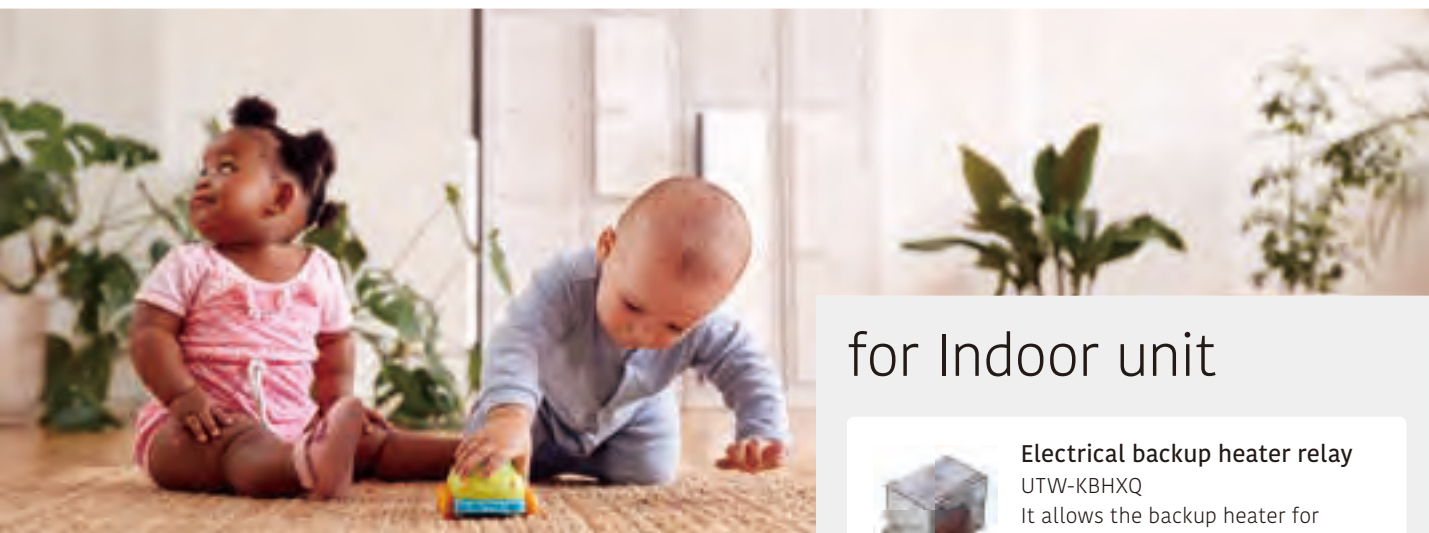

for Indoor unit



Electrical backup heater relay UTW-KBHXQ

It allows the backup heater for heating at 3 kW as standard can be used at 6 kW.



for Outdoor unit



Drain pan UTW-KDPXQ

It is used to collect and drain condensation water generated by outdoor units.



Antivibration Rubber feet UTW-KARXQ

It reduces vibration caused by the operation of compressors and other equipment, and suppresses the generation of noise.



Antifreezing valve for Monobloc UTW-KAVXQ

When water pipes freeze, the internal pressure increases and the pipes are purged to prevent parts from breaking.



Individual Control

Room thermostat

An optional wireless thermostat allows remote control of the ATW system away from the indoor units. Can also be operated from mobile apps.



Wired power supply
UTW-C225XQ



Battery power supply
UTW-C228XQ

Cozy tough (Application)

* Cozytouch is a service of Group Atlantic



Type-A Optional Parts List

Product Name		Model Name	Monobloc Type			
			Comfort series			
			1Ø			
			Contoll Box	Wall Mounted	DHW Integrated	Outdoor Unit
Second Circuit Kit		UTW-KZSXQ		● ^{*1}		
DHW Kit		UTW-KDWXQ		●		
Second Circuit Kit		UTW-KZDXQ			● ^{*1}	
DHW Loop Kit		UTW-KDLXQ			●	
DHW Expansion Kit		UTW-KDEXQ			●	
Outdoor temperature sensor		UTW-KESXQ	●	●	●	
Condensation detection sensor		UTW-KCDXQ	●	●	●	
Regulation Extension Kit		UTW-KREXQ	●	●	●	
Electrical Backup heater relay		UTW-KBHXQ		●	●	
Room thermostat	Wired power supply 	UTW-C225XQ	●	●	●	
	Battery power supply 	UTW-C228XQ	●	●	●	
	Cover Plate for thermostat 	UTW-KCPXQ	●	●	●	
Drain pan		UTW-KDPXQ				●
Antivibration Rubber feet		UTW-KARXQ				●
Antifreezing valve for Monobloc		UTW-KAVXQ				●

Product Name		Model Name	Monobloc Type			
			Comfort series			
			1Ø			
			Controll Box	Wall Mounted	DHW Integrated	Outdoor Unit
Single Circuit Kit	 (×1)	UTW-KZC1XQ	•			
Second Circuit Kit	 (×2)	UTW-KZC2XQ	•			
	 (×1)					
Third Circuit Kit	 (×3)	UTW-KZC3XQ	•			
	 (×2)					
	 (×1)					
Boiler Connection Kit		UTW-KBCXQ	•			
DHW Kit		UTW-KDWCXQ	•			
Backup Heater Kit		UTW-HB6CXQ	•			
DHW tank	200 Liters 300 Liters 	UTW-T20AXH UTW-T30AXH	•	•		
	200 Liters 300 Liters 	UTW-T20BXH UTW-T30BXH	•	•		

*1: Regulation extension kit (UTW-KREXQ) is not included but is required for connection.

Type-**B**

Comfort Control

The high-grade heating controller automatically adjusts the flow temperature according to the climate conditions to maintain the room and domestic hot water temperatures at the desired levels.

Indoor unit Controller

4 Heating modes

1. Automatic mode

Enables automatic switching between Comfort mode and Reduce mode according to time program

2. Reduce mode

Maintains water temperature at a lower level

3. Comfort mode

Maintains water temperature at a comfortable level

4. Protection mode


Activates frost protection in standby operation



Useful Features


Automatic heating curve control

Automatic temperature regulation according to heating curve (depending on heating terminal and outdoor temperature)

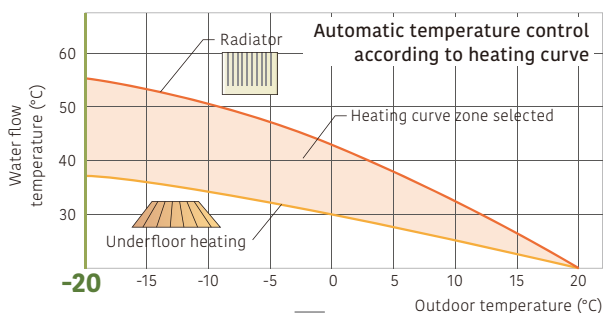

The heating curve will shift to adjust the room temperature setting.

Can be fine-adjusted when it is too warm or too cold.

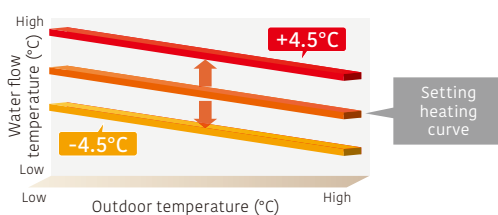

Quick recovery from defrosting

Maintains room temperature by boost start operation during defrosting.


Auto changeover

When cooling mode is selected, the system automatically switches between cooling and heating modes depending on the outdoor temperature to serve as an all-season air conditioner.

2-zone independent control

2-zone independent control (For example, the individual control of 2 underfloor heating zones or the combination of 1 underfloor heating zone and 1 radiator zone)*1


*1: Optional parts required



2-stage low-noise mode

The outdoor unit can be switched to quiet mode, depending on the installation environment.

*Effective only for high power series



Backup heater operation

Backup heater maintains a comfortable room temperature even when the outside temperature is low. The backup heater is intelligently controlled as a safety backup for very cold days and nights, and only operates when really needed.

* Optional parts is needed for high power series.

Energy Saving

Time program

- The timer is easy to set.
- You can select the heating mode in conjunction with various times of the day.

Day-weekly timer

- Allows up to 3 settings per day.
- Allows individual settings for each day of the week.

Holiday timer

- Allows up to 8 settings.
- While you are away from home for an extended period during winter, the system prevents your room or house from freezing.

Peak cut Function*2

Sets the peak current value to reduce power consumption.

Mode	Ratio to reduce power consumption
1	100%
2	75%
3	50%
4	Almost 0%


* Please refer to page W-054 and W-055 for optional parts information.



Safety Features


Anti-Legionella function

Prevents the growth of Legionella bacteria in the DHW tank to supply safe and clean hot water at all times.




Anti-freeze function

When the outside temperature drops below a specified level, the compressor will self-activate and water will also be automatically circulated to prevent freezing.

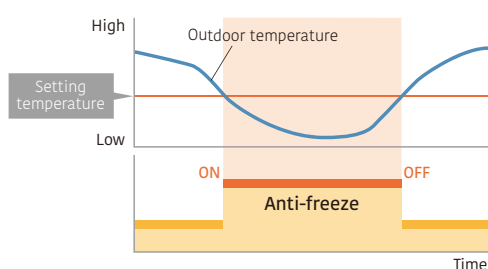

Emergency operation

If an outdoor unit fails to operate, a built-in backup heater or an external boiler is activated to supply an uninterrupted supply of hot water to the house.

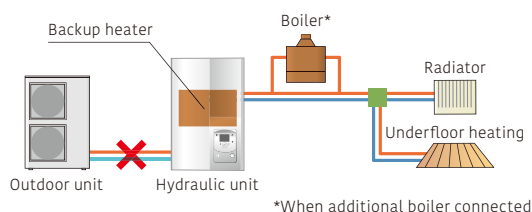

Error and Maintenance Alarm


Enables quick error-handling services and maintenance



Error



Maintenance




- Error history saves 10 errors in memory
- Display telephone number of service company

Type-B

Simple installation

Presetting configurations

A controller installed makes it easy to configure the system without having to set each component or unit individually.

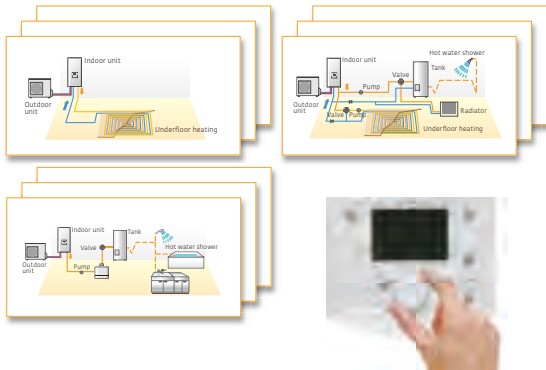


8 simple patterns for system presetting
(Pair of heating: 12 patterns)

Configuration (Parameter 5700)	Installation type
Presetting 1	1 heating circuit
Presetting 2	2 heating circuits
Presetting 3	1 heating circuit with boiler backup
Presetting 4	2 heating circuits with boiler backup
Presetting 5	1/2 heating circuit with buffer control
Presetting 6	1/2 heating circuit with buffer control and boiler backup
Presetting 7	Cascade connection Primary
Presetting 8	Cascade connection A
Presetting 9	Cascade connection B/C

- DHW & solar control auto detection
- Cascade connection only available in High Power models.

Outdoor temperature simulation


It verifies that each unit operates properly under the set conditions and expected outdoor air temperature when the system is actually assembled.

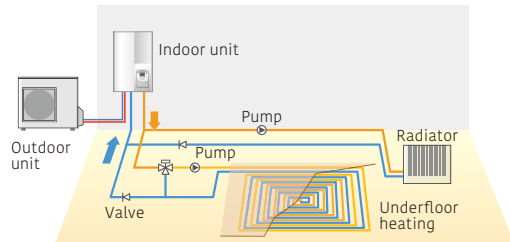


The outdoor temperatures can be simulated in the range of -50°C to +50°C.

Concrete floor drying


Allows the concrete surrounding the hot-water pipes to dry more quickly, shortening the construction period for underfloor heating installations.

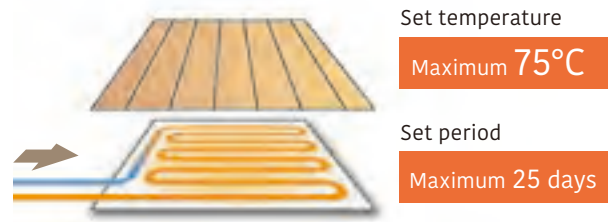

Controller with a large liquid crystal display and buttons for easy function setting

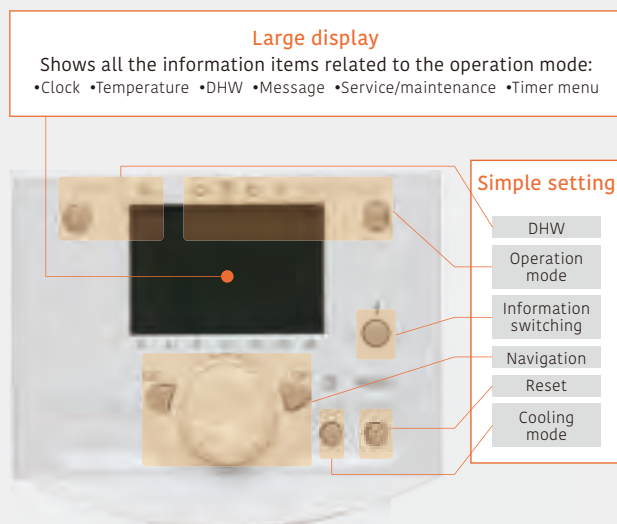

Main operation flow and settings for installers and end users

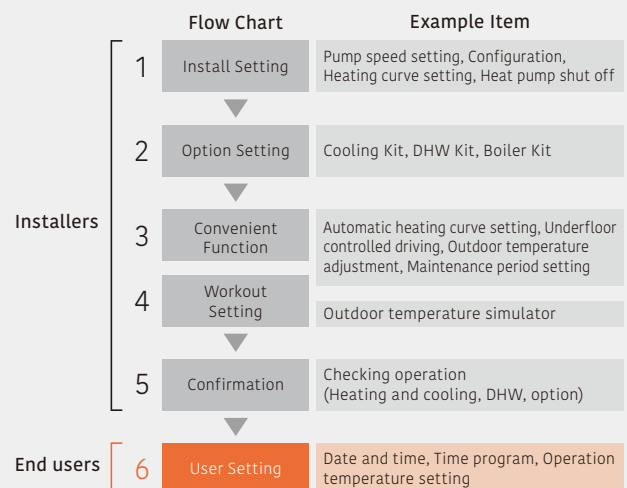


Easy Installation & Maintenance

- All hydraulic safety and control components are built in with no additional selection required.
- Lifting bars for installation free of difficulty or risk
- Easy access for maintenance
- Refrigerant pump down operation

Maintenance Support

Diagnostics functions for troubleshooting

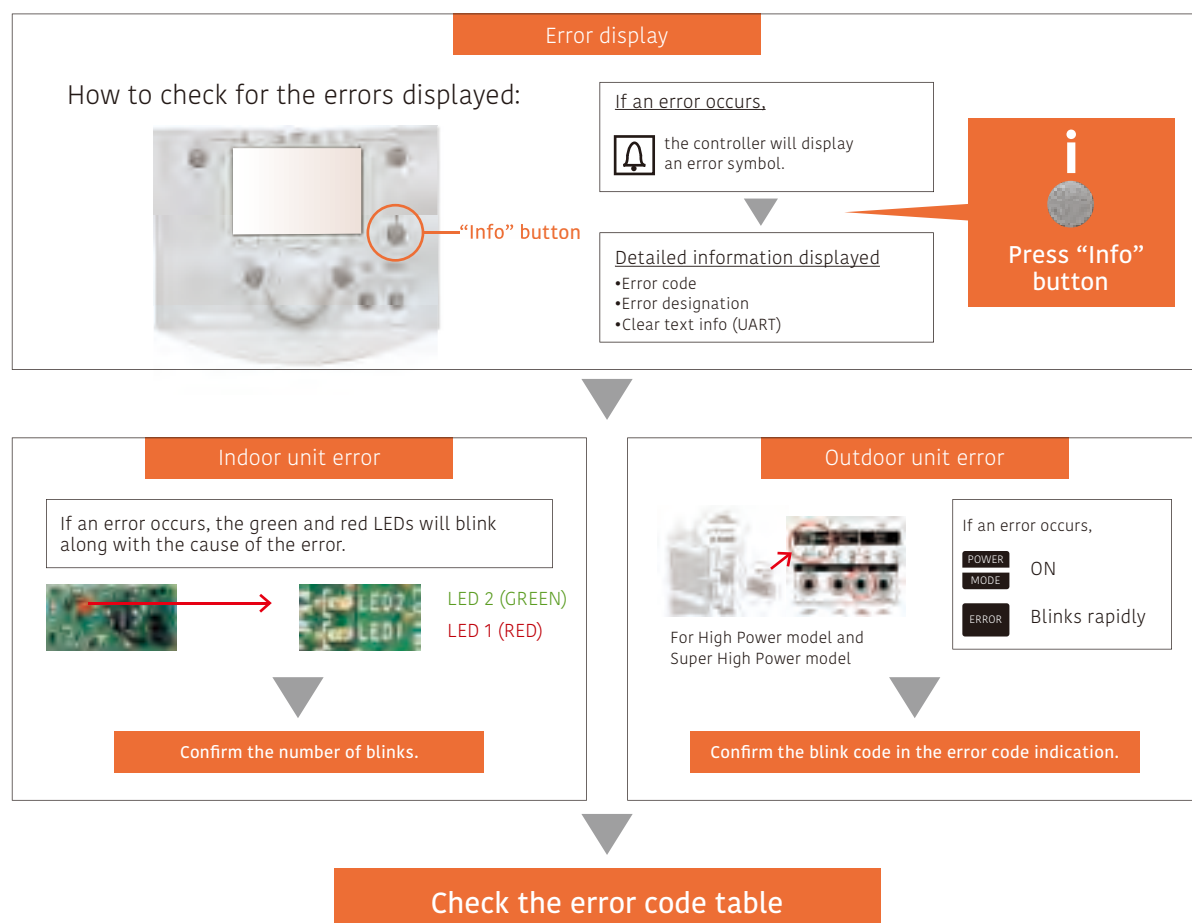

Type-**B**

Control Overview

To meet the diverse needs of customers, we offer a variety of control options, such as individual control and remote control options.

Individual Control



Wireless room thermostat (option)
UTW-C58XA



Wired room thermostat (option)
UTW-C55XA



Wired remote controller (option)
UTW-C74TXF*¹
UTW-C74HXF*¹

RF module



UTW-MRCXD



Adapters for external devices



Web server (option)
UTW-KW1XD
UTW-KW4XD



MODBUS[®] clip (option)
UTW-KMBXJ*²

Internet



Remote control system



Smart device control



Home automation system

* Please refer to page W-038 and W-039 for system compatibility information.





Super High Power series
Indoor unit

Service & Maintenance Tool



Web server (option)
UTW-KW1XD
UTW-KW4XD

or



LPB clip (option)
UTW-KL1XD

**Service tool
(option)**



UTW-KPSXD*³
software



UTW-KSTXD*⁴

*3: UTW-KW1XD or UTW-KW4XD is required for the connection.
*4: UTW-KL1XD is required for the connection.

Indoor unit Controller

Easy-to-set operation modes

- Selecting the heating mode and domestic hot water (DHW) operation

Large liquid crystal display

- Shows operation status
- Shows error messages
- Messages in plain text

Navigation and setting

- Select from heating menu
- Setting Time program



HMI Kit (option)
UTW-KHMXE
Supports
multiple languages

Type-**B**

Optional Parts Overview

Various optional parts are available to use ATW according to needs and environments.

for Locally units



UTW-KZSXE*1

Second Circuit Kit

It can supply hot water at different temperatures to each two types of heating equipment, such as radiators and underfloor heating.



UTW-KZDXE*1



UTW-KZSXJ



UTW-KZDXJ

Boiler Connection Kit

It can build hybrid systems using both boilers and heat pumps. Boiler and heat pumps are switched according to outside air temperature.



UTW-KBSXD



UTW-KBDXD



UTW-KBSXJ

*1: The UTW-KREXD (Regulation Extension Kit) is not included but is required for connection.



for DHW



DHW Kit

UTW-KDWXD (External)
Required to connect locally purchased DHW tanks to air to water.



DHW tank

200 Liters: UTW-T20AXH / UTW-T20BXH
300 Liters: UTW-T30AXH / UTW-T30BXH
The BXH series is a more efficient tank than the AXH series.



UTW-KDEXE



UTW-KDEXL

DHW Expansion Kit

The expansion vessel(18L) for connection to DHW water piping.





for Indoor unit



Circulating pump

UTW-PHFXG

The high-output pump for replacement of the standard pump in the hydraulic unit. It can be used in properties with longer and more complex water piping.

Cascade Master/Slave Kit

Up to 3 indoor units can be connected for large-capacity use. It is needed to install a primary kit in one unit and a secondary kit in one or two other units.



Cascade Master Kit
(incl. LPB clip)



Cascade Slave Kit
(incl. LPB clip)

Cooling Kit

Required when using ATW also for cooling operation. It is used to prevent condensation occurring in the indoor unit.



UTW-KCLXD



UTW-KCLXL

for Outdoor unit



Drain pan

UTW-KDPXB

It is used to collect and drain condensation water generated by outdoor units.



External Connection Kit

UTY-XWZXZ2 / UTY-XWZXZ3

The signal input (low noise mode, peak cut) and signal output (compressor operation, base pan heater control) for outdoor units are possible externally.



Electrical backup heater relay

UTW-KBHXL

It allows the backup heater for heating at 3 kW as standard can be used at 6 kW.

Type-B Optional Parts List

Product Name		Model Name	Split Type												Split DHW Integrated Type													
			Super High Power			High Power						R32 Comfort				Super High Power			High Power						R32 Comfort			
			1Ø		3Ø	1Ø		3Ø		1Ø		1Ø		3Ø	1Ø		3Ø	1Ø		3Ø		1Ø						
			16	15	17	11	14	11	14	16	5	6	8	10	16	15	17	11	14	11	14	16	5	6	8	10		
Second Circuit Kit		UTW-KZSXE	—	—	—	●*1	●*1	●*1	●*1	●*1	●*1	●*1	●*1	—	—	—	—	—	—	—	—	—	—	—	—			
		UTW-KZDXE	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●*1	●*1	●*1	●*1	●*1	●*1	●*1	●*1	●*1			
		UTW-KZSXJ	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			
		UTW-KZDXJ	—	—	—	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—			
Boiler Connection Kit		UTW-KBSXD	—	—	—	●	●	●	●	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—			
		UTW-KBDXD	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●	●	●	●	●	●			
		UTW-KBSXJ	●	●	●	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—			
Balancing vessel		UTW-TEVXA	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
DHW Kit		UTW-KDWXD (External)	●	●	●	●	●	●	●	●	●	●	●	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2			
DHW tank	200 Liters 300 Liters 	UTW-T20AXH UTW-T30AXH	●	●	●	●	●	●	●	●	●	●	●	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2			
	200 Liters 300 Liters 	UTW-T20BXH UTW-T30BXH	●	●	●	●	●	●	●	●	●	●	●	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2	__e2			
DHW Expansion Kit		UTW-KDEXE	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●	●	●	●	—	—	—	—				
		UTW-KDEXL	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●				
Circulating pump		UTW-PHFXG	●	●	●	●	●	●	●	—	—	—	—	●	●	●	●	●	●	●	—	—	—	—				
Cooling Kit		UTW-KCLXD	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	—				
		UTW-KCLXL	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	●	●				
Regulation Extension Kit		UTW-KREXD	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
Drain pan		UTW-KDPXB	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	●	●	●	—				
Cascade Master Kit (incl. LPB clip)		UTW-KCMXE	—	—	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				
Cascade Slave Kit (incl. LPB clip)		UTW-KCSXE	—	—	—	●	●	●	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—				

Product Name		Model Name	Split Type												Split DHW Integrated Type												
			Super High Power			High Power						R32 Comfort			Super High Power			High Power						R32 Comfort			
			1Ø		3Ø	1Ø		3Ø		1Ø		1Ø		3Ø	1Ø		3Ø		1Ø								
			16	15	17	11	14	11	14	16	5	6	8	10	16	15	17	11	14	11	14	16	5	6	8	10	
HMI Kit		UTW-KHMXE	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	
Remote controller	Wired 	UTW-C74TXF	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	
		UTW-C74HXF	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	
Room thermostat	Wired 	UTW-C55XA	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Wireless 	UTW-C58XA	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	
Outdoor sensor transmitter		UTW-MOSXD	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	●*4	
RF modules for BSB-Port		UTW-MRCXD	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Web server		UTW-KW1XD	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	●*5	
		UTW-KW4XD	—	—	—	●*5	●*5	●*5	●*5	●*5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
LPB clip		UTW-KL1XD	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
MODBUS® clip		UTW-KMBXJ	—	—	—	●*6	●*6	●*6	●*6	●*6	—	—	—	—	—	—	—	●*6	●*6	●*6	●*6	●*6	—	—	—	—	
Service tool (incl. OCI700 Adapter)		UTW-KSTXD	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	●*7	
Service tool software		UTW-KPSXD	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	●*8	
External Connect Kit		UTY-XWZXZ2	—	—	—	●	●	●	●	●	—	—	—	—	—	—	—	●	●	●	●	—	—	—	—	—	
		UTY-XWZXZ3	●	●	●	—	—	—	—	—	—	—	—	●	●	●	—	—	—	—	—	—	—	—	—	●	
Electrical backup heater relay		UTW-KBHXL	—	—	—	—	—	—	—	—	●	●	●	●	—	—	—	—	—	—	—	—	—	●	●	●	●

*1: The UTW-KREXD (Regulation Extension Kit) is not included but is required for connection.

●: Available —: Not Available

*2: Split DHW integrated type supplies DHW without the DHW Kit and DHW tank.

*3: Includes 21 languages with no need to prepare an RC for Eastern Europe separately.

C74TXF has a built-in room temperature sensor. C74HXF has a built-in room temperature and humidity sensor.

*4: UTW-MRCXD (RF modules) is required for the connection.

*5: The connection of UTW-KW4XD for simultaneous control of multiple ATW units is only possible for cascade systems.

*6: Additional Spare parts 9708302034 (Analogue interface PCB) and 109696 (connection wire) are required.

*7: UTW-KL1XD (LPB clip) is required for the connection.

*8: UTW-KW1XD or UTW-KW4XD (Web server) is required for the connection.

Light Commercial & Residential

SPLIT & MULTI-SPLIT

Energy saving design to provide a comfortable indoor environment while being environment-friendly.

These are air conditioners that are both user-friendly and environment-friendly. Fujitsu General air conditioners cater to a wide range of needs, from living rooms, bedrooms, stores, small offices, through to hotels.

SPLIT

- Refrigerant R32 models
 - Wall-mounted type
 - Cassette
 - Duct
 - Floor
 - Ceiling
- Refrigerant R410A models
 - Duct

MULTI-SPLIT

- Refrigerant R32 models
 - 2-unit to 5-unit Multi-split
 - Simultaneous Multi-split Twin/Triple
- Refrigerant R410A models
 - 6-unit Multi-split
 - Simultaneous Multi-split Twin/Triple/Double Twin



SPLIT & MULTI-SPLIT

Light Commercial &
Residential



Light Commercial & Residential

SPLIT

- S-004 Split Overview
- S-006 Indoor Units Lineup
- S-010 Features
- S-015 Features Explanation
- S-060 Wall-mounted Specifications
- S-063 ECO Series Lineup Specifications
- S-068 Feature Summary



Refrigerant R32 models

Wall-mounted type - Built in W-LAN adapter model

- S-016 Designer Range
 - High Spec & Design
 - Cool Beauty Design
- S-020 Standard Range - High-Efficiency & Comfort
- S-022 ECO Range - Compact Size

Wall-mounted type

- S-024 Standard Range
 - High-Efficiency & Large Rooms
- S-028 ECO Range
 - Compact Size
 - Comfort for Large Rooms
 - Cooling-enhanced type

Cassette

- S-034 Compact 4-way Flow Range - Compact Size
- S-036 Circular Flow Range - Comfort for Large Rooms

Duct

- S-038 Slim Duct - Slim Design
- S-040 Medium Static Pressure Duct
 - High-Efficiency & Comfort
 - Compact Size
 - Standard
- S-050 High Static Pressure Duct

Floor, Ceiling

- S-056 Floor - Compact Size
- S-058 Ceiling



Refrigerant R410A models

Duct

- S-052 High Static Pressure Duct
- S-054 Big Duct





SPLIT

Split Overview

Fujitsu General provides its customers with 5 types and 159 models of air conditioning systems perfect for various customer applications and layouts.



Existing pipes can be reused if they meet our guidelines

Please consult with our regional sales subsidiaries for details.

Cautions when reusing the existing pipes

- The thickness of the pipes must be 0.8 mm or thicker in accordance with the pipe diameter.
- Use flares that have been reworked to be compatible with the new refrigerant, and are compliant with ISO 14903.
- Select suitable wiring in accordance with the installation manual of the new air conditioning unit.
- When pump-down is not possible or when the inner pipe walls are dirty, make sure to clean the pipes before connecting new ones.
- When using different diameters pipes from the standard sizes,
 - The performance may not reach the published specification value.
 - Dedicated flare nuts compliant with ISO 14903 should be procured locally.
 - Restrictions apply to pipe lengths, refrigerant volumes, and room sizes.



Wall-mounted type

Simple and easy to install, all models, are expertly designed to control airflow and save energy. The design, with its flat and simple appeal, perfectly matches room interiors. Many of the models in the lineup adopt the new environmentally friendly R32 refrigerant.



Duct

The main unit is hidden in the wall, making the room look neat and tidy. The lineup also includes slim duct models that can be installed in narrow spaces such as between beams and under ceilings. Large models, suitable for air conditioning vast spaces, allow multiple outlets to be installed in just one unit, and are perfect for atypical room layouts.



Cassette

The Cassette type, which blends in perfectly with the interior design, blows air in all four directions to create an even air-conditioning for the entire space. We have a variety of series including Compact models with a uniquely designed panel to match grid ceilings, and Circular Flow models that send airflow in a 360° direction.



Floor

The compact and slim design makes this model suitable for installation in commercial as well as residential buildings. This model is also recommended as a heating device because it delivers a warm airflow from both the top and bottom outlets.



Ceiling

As with the wall-mounted unit, ceiling installation is very easy, and the unit's thin structure with a height of just 240 mm allows neat installation. The powerful airflow that can reach far away from the wide outlet is perfect for large meeting rooms, audiovisual rooms, and other rectangular spaces with a lot of depth.

Indoor Units Lineup

Type	Range	Refrigerant	Model	Class		
				7	9	12
Wall-mounted type Built in WLAN adapter model	Designer Range High Spec & Design	 Cooling & Heating	 	ASEH07KGTG	ASEH09KGTG	ASEH12KGTG
	Designer Range Cool Beauty Design	 Cooling & Heating	 	ASEG07KETF ASEG07KETF-B	ASEG09KETF ASEG09KETF-B	ASEG12KETF ASEG12KETF-B
	Standard Range High-Efficiency & Comfort	 Cooling & Heating	 	ASEH07KMCG ASEH07KMCG-B	ASEH09KMCG ASEH09KMCG-B	ASEH12KMCG ASEH12KMCG-B
	ECO Range Compact Size	 Cooling & Heating	 	ASEH07KNCA	ASEH09KNCA	ASEH12KNCA
Wall-mounted type	Standard Range High-Efficiency & Large Rooms	 Cooling & Heating	 			
	Standard Range High-Efficiency & Large Rooms	 Cooling & Heating	 			
	ECO Range Compact Size	 Cooling & Heating	 	ASEG07KPCE	ASEG09KPCE	ASEG12KPCE
	ECO Range Comfort for Large Rooms	 Cooling & Heating	 			
	ECO Range Cooling-enhanced	 Cooling & Heating	 	ASEH07KLTA	ASEH09KLTA	ASEH12KLTA



FUJITSU GENERAL (Euro) GmbH
participates in the ECP program for AC.
Check ongoing validity of certificate:
www.eurovent-certification.com

Class										
14	18	22	24	30	36	45	54	60	72	90
ASEH14KGTG										
ASEG14KETF ASEG14KETF-B										
ASEH14KMCG ASEH14KMCG-B										
	ASEG18KMTE		ASEG24KMTE							
				ASEH30KMTB	ASEH36KMTB					
	ASEG18KLCA		ASEG24KLCA							

Indoor Units Lineup

Type	Range	Refrigerant	Model	Class		
				7	9	12
Cassette	Compact 4-way Flow Range Compact Size	 Cooling & Heating			AUXG09KVLA	AUXG12KVLA
	Circular Flow Range Comfort for Large Rooms	 Cooling & Heating	 18/22/24 30/36/45/54			
Duct	Slim Duct	 Cooling & Heating	 09/12/14 18		ARXG09KLLAP	ARXG12KLLAP
	Medium Static Pressure Duct High-Efficiency & Comfort	 Cooling & Heating	 12/14/18 22/24 30/36/45/54			ARXH12KMTAP
	Medium Static Pressure Duct Compact Size	 Cooling & Heating	 12/14 18/22/24/30 36/45/54			ARXG12KHTAP
	Medium Static Pressure Duct Standard	 Cooling & Heating				
	High Static Pressure Duct	 Cooling & Heating				
		 Cooling & Heating				
	Big Duct	 Cooling & Heating				
Floor Compact & Comfort		 Cooling & Heating			AGEG09KVCA	AGEG12KVCA
Ceiling		 Cooling & Heating	 18/22 24/30 36/45/54			



FUJITSU GENERAL (Euro) GmbH
participates in the ECP program for AC.
Check ongoing validity of certificate:
www.eurovent-certification.com

Class										
14	18	22	24	30	36	45	54	60	72	90
AUXG14KVLA	AUXG18KVLA	AUXG22KVLA	AUXG24KVLA							
	AUXG18KRLB	AUXG22KRLB	AUXG24KRLB	AUXG30KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB			
ARXG14KLLAP	ARXG18KLLAP									
ARXH14KMTAP	ARXH18KMTAP	ARXH22KMTAP	ARXH24KMTAP	ARXH30KMTAP	ARXH36KMTAP	ARXH45KMTAP	ARXH54KMTAP			
ARXG14KHTAP	ARXG18KHTAP	ARXG22KHTAP	ARXG24KHTAP	ARXG30KHTAP	ARXG36KHTAP	ARXG45KHTAP	ARXG54KHTAP			
		ARXG22KMLB	ARXG24KMLA	ARXG30KMLA	ARXG36KMLA	ARXG45KMLA				
						ARXG45KHTB	ARXG54KHTB			
								ARYG60LHTA		
									ARYG72LHTA	ARYG90LHTA
AGEG14KVCA										
	ABEG18KRTA	ABEG22KRTA	ABEG24KRTA	ABEG30KRTA	ABEG36KRTA	ABEG45KRTA	ABEG54KRTA			

Features


High-Efficiency



All DC Inverter Technology

DC twin-rotary compressor


A high-efficiency 2-cylinder rotary compressor with a DC inverter optimizes the internal structure of the compressor to achieve higher energy efficiency compared to similar compressors.

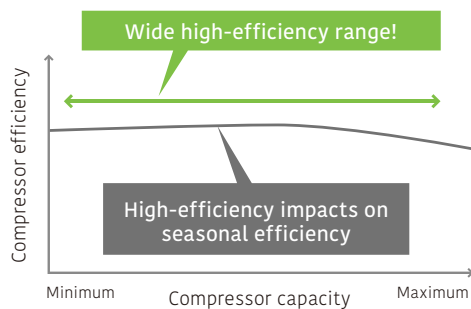

DC twin-rotary compressor

DC fan motor


The DC fan motor produces high power, a wide operating range, and high-efficiency.



DC fan motor

Sine-wave DC inverter control

High-efficiency operation is realized by using sine-wave DC inverter control.





Heat Exchanger for Wall-mounted type

High-density multipath heat exchanger

Thinner and denser heat exchangers and multipath efficiency technology have substantially improved heat exchange performance.

High-performance sub-cool heat exchanger

A counter-type bypass circuit has been incorporated to achieve a higher performance. (Large multi-split type, VRF)

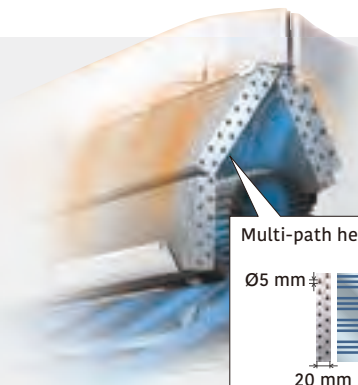


High Energy Saving




Human sensor control

The Human sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.

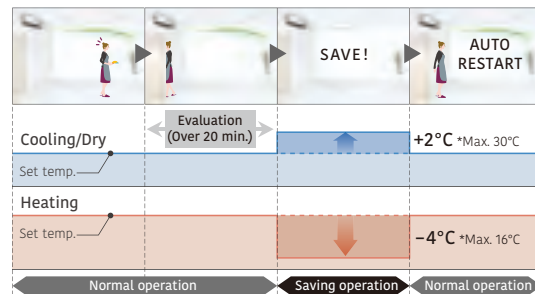


Economy operation

Limits maximum operation, reducing the power consumption, and thereby suppressing the maximum load.

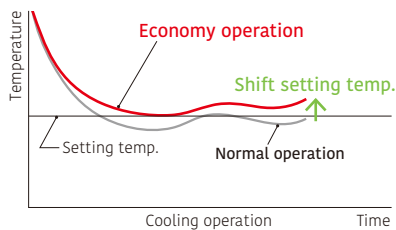


Setting temperature range limitation

The minimum and maximum temperature range can be set giving further energy savings while considering the comfort of the occupants.

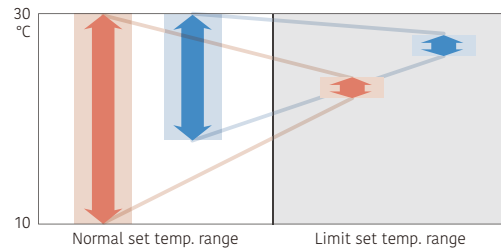


Set temperature auto return

- The set temperature automatically returns to the previously set temperature.
- The time range in which the set temperature can be changed is from 10 to 120 minutes.

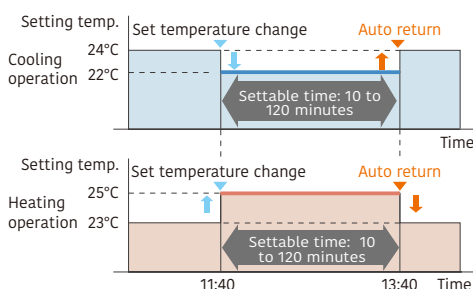

Auto-off timer

- The indoor unit is automatically turned off when it reaches a preset operating time frame.
- The time frame of the Auto-off timer can be flexibly scheduled.
- Auto-off times can be set from 30 to 240 minutes.


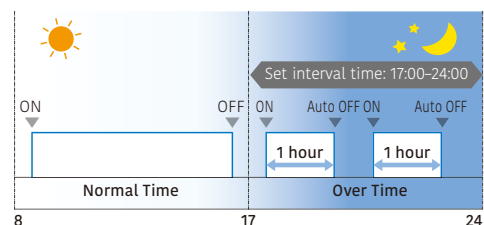


More Comfort




Power diffuser

These three technologies enable precise wind direction control and improve ventilation efficiency; our airflow control offers a more comfortable environment.

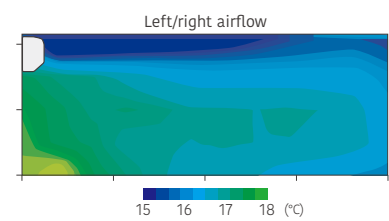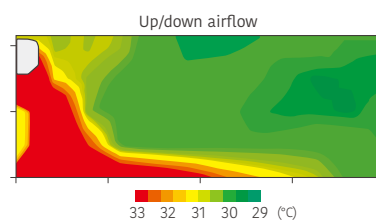

Wireless LAN control


Users can control their air conditioners from anywhere with their mobile devices while out or on the move.

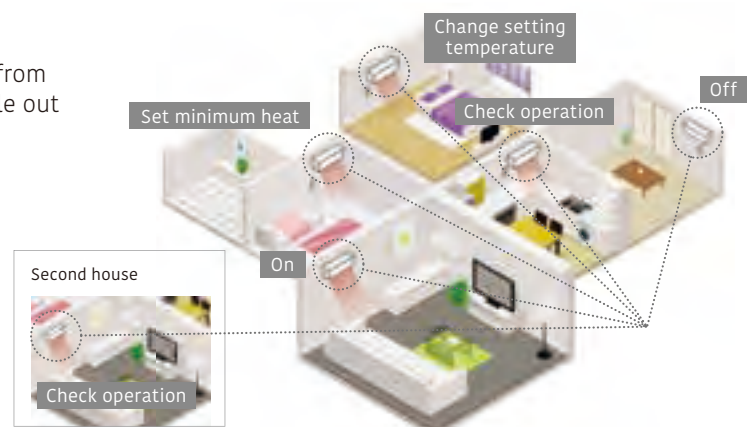




Powerful operation

Maximum airflow and maximum compressor speed are maintained for the period necessary to reach the set temperature quickly.

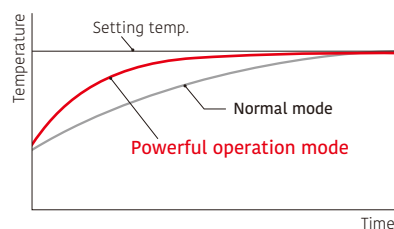

10°C heat

After a person has left the room, the system switches to minimum heating operation to maintain the room temperature. (Maintained at 10°C)

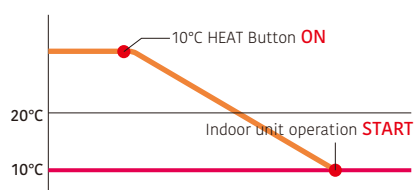

Uniform air conditioning

Circular airflow to achieve uniform air conditioning without temperature unevenness in workspaces




Quiet and Comfort Control



Low Noise Technology


Outdoor unit fan

Outdoor unit fan design with a small separation vortex, minimized air volume by fan control, and top-class low noise




Air stabilizer in Duct

Low-noise duct structure with a built-in air stabilizer

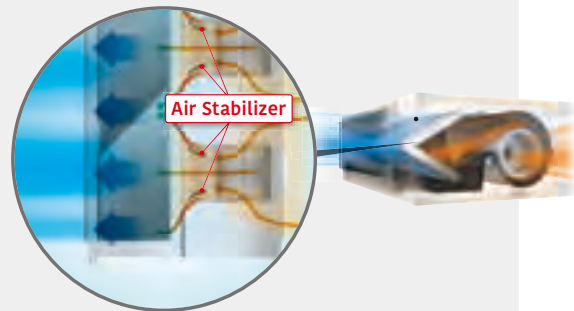

Outdoor unit low noise operation

Users can choose low noise levels, depending on the installation environment. Operation time can be set by timer.

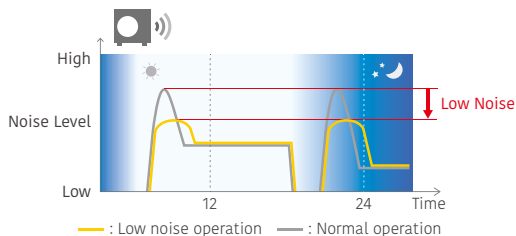


*During Outdoor unit low noise operation, the maximum capacity is reduced, so it may take longer for the room to warm up.

*Even if Outdoor unit low noise operation is set, the operating noise may not decrease if the room temperature is close to the set temperature.



Auto changeover

In an auto setting, the system automatically switches between cooling and heating modes according to the set temperature and room temperature.

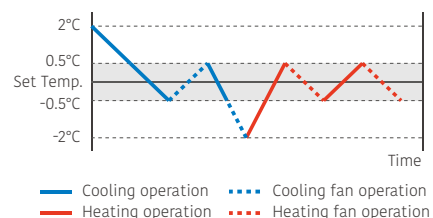

Fresh air intake for Cassette, Duct, Ceiling

Fresh air is taken in by a fan connected to an external control unit.



Fresh Air Intake Kit

Feature Explanation

Energy-Saving Features



Save Human sensor

The Human sensor detects the movement of people in the room and determines whether to switch to energy saving operation.



Setting temperature range limitation

Sets the minimum and maximum limits on room temperature to establish the right balance between energy saving and a comfortable environment.



Human sensor control

The Human sensor (option) detects movement of people in the room and decides whether to save energy or stop the unit.



Set temperature auto return

The setting temperature automatically returns to the previously set temperature.



Economy operation

The thermostat setting is adjusted automatically according to the room temperature to avoid unnecessary cooling or heating.

Features for Comfort



Power diffuser

An additional louver that opens based on input from monitoring sensors to quickly enhance immediate comfort needs.



Outdoor unit low noise operation

The noise level of the outdoor unit can be selected.



Double swing automatic

Complex swing action of the louver enables automatic swing in both the left/right and up/down directions.



Connectable fresh air duct

Outside air can be introduced by attaching a locally purchased duct to the fresh air knockout and an optional part.



Individual airflow direction control

Each louver of a 4-way Cassette type can be controlled individually to provide comfortable airflow.



Powerful operation

Operation at maximum air flow and compressor speed, that quickly makes the room comfortable.



Auto changeover

The unit automatically switches between heating and cooling modes based on the temperature setting and the room temperature.



Automatic fan speed

A micro-computer automatically adjusts the airflow to follow the changes in room temperature.



Fresh air intake

Fresh air can be taken in by a fan connected to an external control unit.



10°C Heat

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.



UP/DOWN swing louver

The vertical louver automatically swings up and down.



Auto restart

In the event of a temporary power failure, the air conditioner will automatically restart in the same operating mode as before, once the power supply is restored.



Connectable distributing duct

Locally purchased branch ducts can be attached to the systems to distribute the airflow.

Convenience Features



Auto-off timer

Automatically stops operation when a fixed time has elapsed from the start of operation.



Weekly timer

Different ON-OFF times can be set for each day.



External error output



Multi System Control

Operation using "Lead Lag Operation", "Back up operation", "Lag Operation" is possible. (Page C-011)



Sleep timer

A micro-computer gradually changes the room temperature automatically to promote a comfortable night's sleep.



Weekly & Temperature setback timer

Weekly & Temperature setback timer can set the temperature for 2-time spans and for each day of the week.



External ON/OFF input



Special Cooling

"Special Cooling" is a function that supports the operation of "Multi System Control".



Program timer

This digital timer allows selection of one of four options: ON, OFF, ON » OFF, or OFF » ON.



Filter sign

Indicates the filter cleaning period by blinking.



Wireless LAN control

The optional WLAN adapter enables the air conditioner to be operated by smartphone or tablet PC from outside the home.

Clean Features



Ion deodorization filter

The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by an ultra-fine-particle ceramic.



Washable panel

Since the front panel is easy to remove, maintenance is also easy.



Apple-catechin filter

The Apple-catechin filter uses static electricity to clean fine particles and dust from the air.



Silver Ion Filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.



Long-life filter

Installation / Support



Automatic airflow adjustment

Automatically detects required airflow in each application case and adjusts the volume.



Drain pump as standard



Blue fin



Refrigerant cycle monitor

The values of each sensor and actuator can be displayed, and the status of the refrigeration cycle can be checked.



ALL DC models

SPLIT

KG
Series

Wall-mounted type

Built-in WLAN adapter model
Designer Range
High Spec & Design



High energy saving

Top class high efficiency is achieved by high efficient lambda-shaped heat exchanger, large cross flow fan and new refrigerant.



*07/09/12 models

SEER


9.80*

*07 model

SCOP

5.20*


*07/09/12 models

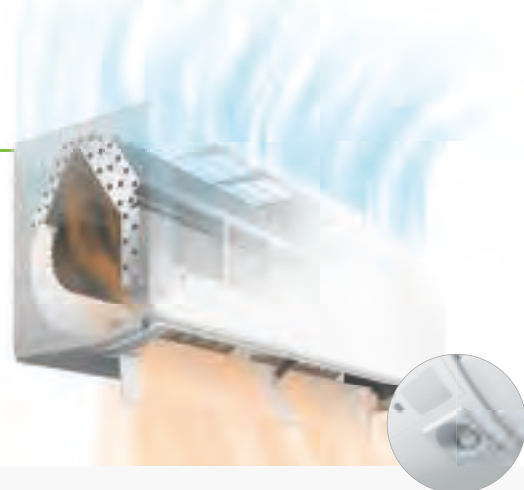

Hybrid-heat exchanger

The large hybrid heat exchanger has greatly improved the heat exchange efficiency to achieve top-level SEER and SCOP.

Ø5 mm
High-density
heat exchanger




Ø7 mm
Large heat
exchanger

Ø107 Large cross-flow fan

The large-diameter fan generates air volume efficiently even at reduced power.



Ø95



Ø107

Human sensor

The Human sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.



Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



Quiet & Comfort

19 dB(A)

(07/09/12 models)

Cooling only


Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.

* See page C-020 for details on smart device control.




AIRSTAGE
Mobile



Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

*Wired remote controller (UTY-RNRYZ5 or UTY-RVRY) is required.

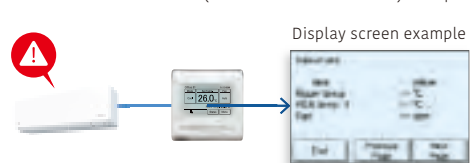



Model: ASEH07KGTG / ASEH09KGTG / ASEH12KGTG / ASEH14KGTG



WLAN adapter
(Built-in)



Wireless RC



Specifications

Model name	Indoor unit			ASEH07KGTG	ASEH09KGTG	ASEH12KGTG	ASEH14KGTG
	Outdoor unit			AOEH07KCGG	AOEH09KCGG	AOEH12KCGG	AOEH14KCGG
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.0	2.5	3.4	4.2
		Min.-Max.		0.9-3.3	0.9-3.6	0.9-4.1	0.9-4.5
	Heating	Rated		2.5	2.8	4.0	5.4
		Min.-Max.		0.9-5.2	0.9-5.4	0.9-6.1	0.9-6.4
Input Power	Cooling/Heating		kW	0.400 / 0.500	0.550 / 0.600	0.870 / 0.910	1.220 / 1.450
EER	Cooling		W/W	5.00	4.55	3.91	3.44
COP	Heating			5.00	4.67	4.40	3.72
Pdesign	Cooling/Heating (-10°C)		kW	2.0 / 2.3	2.5 / 2.4	3.4 / 2.5	4.2 / 4.0
SEER	Cooling		W/W	9.80	9.40	8.80	8.00
SCOP	Heating (Average)			5.20	5.20	5.20	4.60
Energy Efficiency Class	Cooling			A+++	A+++	A+++	A++
	Heating (Average)			A+++	A+++	A+++	A++
Max. Operating Current	Cooling/Heating		A	6.5 / 9.0	6.5 / 9.0	6.5 / 9.0	9.0 / 10.5
Annual Energy Consumption	Cooling		kWh/a	71	93	135	184
	Heating			618	646	673	1,217
Moisture Removal			l/h	1.1	1.3	1.6	1.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	36 / 32 / 29 / 19	38 / 34 / 29 / 19	40 / 35 / 30 / 19	43 / 36 / 30 / 20
	Indoor (Heating)	H/M/L/Q		38 / 34 / 31 / 20	39 / 34 / 31 / 20	42 / 38 / 33 / 21	44 / 39 / 33 / 24
Sound Power Level	Outdoor (Cooling/Heating)	High		42 / 43	44 / 45	50 / 50	50 / 50
	Indoor (Cooling/Heating)	High		49 / 51	52 / 52	56 / 58	57 / 59
Airflow Rate	Outdoor (Cooling/Heating)	High	m³/h	56 / 56	58 / 58	65 / 66	65 / 66
	Indoor/Outdoor (Cooling)	High		570 / 1,390	640 / 1,480	680 / 1,800	750 / 1,800
Net Dimensions H x W x D	Indoor/Outdoor (Heating)	High		610 / 1,350	630 / 1,420	750 / 1,690	780 / 1,690
	Indoor	mm		mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
Weight	Outdoor	mm	mm	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290
	Indoor	kg	kg	10	10	10	10
Connection Pipe Diameter (Liquid/Gas)	Outdoor		kg	30	30	31	32
	Indoor		mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
Drain Hose Diameter (I.D./O.D.)			mm	13.8 / 15 to 16.8	13.8 / 15 to 16.8	13.8 / 15 to 16.8	13.8 / 15 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference			°CDB	15	15	15	15
Operating Range	Cooling		°CDB	-10 to 50	-10 to 50	-10 to 50	-10 to 50
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		kg (CO2eq-T)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge			0.75 (0.506)	0.75 (0.506)	0.85 (0.574)	0.85 (0.574)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

Simple remote controller (without operation mode):

UTY-RHRY

Simple remote controller: UTY-RSRY

Wireless remote controller: UTY-LNWX

Communication Kit: UTY-TWRXZ2

External Connect Kit:

UTY-XWZX2
UTY-XWZX25

Network Converter for single split (DC power supply type): UTY-VTGX

Network Converter for single split (AC power supply type): UTY-VTGXV

Silver Ion filter:

UTR-FA16-5

External input and output PCB*1:

UTY-XCSXZ2



External switch controller:

UTY-TERX

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

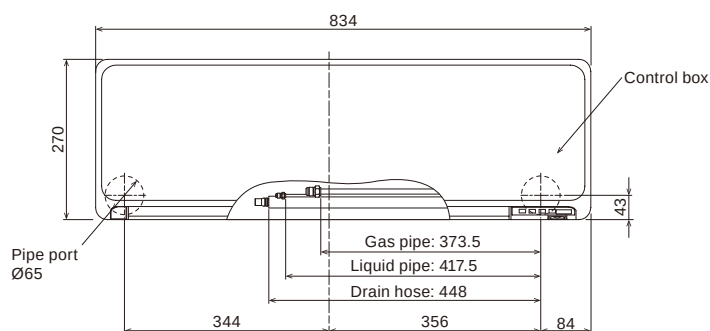

SPLIT

KE
Series

Wall-mounted type

Built-in WLAN adapter model
Designer Range
Cool Beauty Design



Cool beauty design

We have designed this series exclusively for the European market. The exterior design harmonizes beautifully with any decor and adds comfortable elegance to the room. The light, elegant and three-dimensional expression achieved by the curved surface is beautiful from any angle.




CMF: COLOR MATERIAL FINISH

The texture of the front panel expresses the craftsmanship of Europe, and changes its expression with the changing light of the day.


High energy saving

Top class high efficiency is achieved by high efficient lambda-shaped heat exchanger, large cross flow fan and new refrigerant.




SEER ^{*1} 7.4 SCOP ^{*2} 4.4
*1: 07/09 models *2: 12 model

Hybrid-heat exchanger



Ø107 Large cross-flow fan




Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.

* See page C-020 for details on smart device control.



AIRSTAGE
Mobile



Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



20 dB(A)
Cooling only



Model: ASEG07KETF / ASEG09KETF / ASEG12KETF / ASEG14KETF (Peal white X White)
ASEG07KETF-B / ASEG09KETF-B / ASEG12KETF-B / ASEG14KETF-B (Silver X Dark gray)



Peal white X White



Silver X Dark gray




WLAN adapter
(Built-in)



Wireless RC



For ASEG07/09/12KETF
ASEG07/09/12KETF-B



For ASEG14KETF
ASEG14KETF-B

Specifications

Model name	Indoor unit			ASEG07KETF ASEG07KETF-B	ASEG09KETF ASEG09KETF-B	ASEG12KETF ASEG12KETF-B	ASEG14KETF ASEG14KETF-B
	Outdoor unit			AOEG07KETA	AOEG09KETA	AOEG12KETA	AOEG14KETA
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.0	2.5	3.4	4.2
		Min.-Max.		0.9 - 3.0	0.9 - 3.2	0.9 - 3.9	0.9 - 4.4
	Heating	Rated		2.5	2.8	4.0	5.4
		Min.-Max.		0.9 - 3.4	0.9 - 4.0	0.9 - 5.3	0.9 - 6.0
Input Power	Cooling/Heating		kW	0.450/0.555	0.630/0.620	0.935/0.960	1.220/1.410
EER	Cooling		W/W	4.43	3.97	3.65	3.44
COP	Heating		W/W	4.52	4.52	4.17	3.83
Pdesign	Cooling/Heating (-10°C)		kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		W/W	7.40	7.40	7.30	6.90
SCOP	Heating (Average)		W/W	4.10	4.10	4.40	4.10
Energy Efficiency Class	Cooling			A++	A++	A++	A++
	Heating (Average)			A+	A+	A+	A+
Max. Operating Current	Cooling/Heating		A	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling		kWh/a	95	118	163	213
	Heating			785	819	795	1,367
Moisture Removal			l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/33/29/20	40/34/29/20	40/35/30/20	43/36/30/20
	Indoor (Heating)	H/M/L/Q		41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Outdoor (Cooling/Heating)	High	46/46		46/46	50/50	50/50	
Sound Power Level	Indoor (Cooling/Heating)	High		54/56	55/57	55/58	57/59
	Outdoor (Cooling/Heating)	High		61/61	61/62	65/65	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	High		m³/h	650/1,650	700/1,650	700/1,700
	Indoor/Outdoor (Heating)	High	720/1,450	750/1,450	770/1,470	800/1,580	
Net Dimensions	Indoor		mm	295 × 950 (wall side: 840) × 230			
H x W x D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290
	Indoor		kg	11	11	11	11.5
Weight	Outdoor		kg	23	23	25	31
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)				13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15	15
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	0.6 (0.405)	0.6 (0.405)	0.7 (0.473)	0.85 (0.574)	

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

Simple remote controller (without operation mode): UTY-RHRY

Simple remote controller: UTY-RSRY

Communication Kit: UTY-TWRXZ2

External Connect Kit: UTY-XWZX

External switch controller: UTY-TERX

Network Convertor for single split (DC power supply type): UTY-VTGX

Network Convertor for single split (AC power supply type): UTY-VTGXV

Silver Ion filter: UTR-FA16-5



External input and output PCB^{*1}:

UTY-XCSXZ2

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

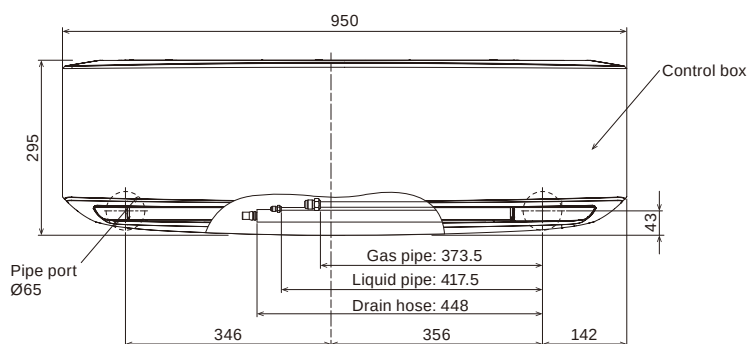

SPLIT

KM
Series

Wall-mounted type

Built-in WLAN adapter model
Standard Range
High-Efficiency & Comfort



Slim & stylish square design

The slim and stylish square design of this indoor unit is realized by using a high-density, multipath heat exchanger and a high-efficiency wind blower.

Warm & gentle color option

Both white and soft black color are relatively gentle tones and no strong contrast, each color harmonize with the environment and create a warm atmosphere.



High energy saving

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.



*07/09/12 models

SEER
8.40*

*07/09 models

SCOP
4.60*

*07/09/12 models

Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



Quiet & Comfort
20 dB(A)
Cooling only


Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.

* See page C-020 for details on smart device control.



AIRSTAGE
Mobile




Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

*Wired remote controller (UTY-RNRYZ5 or UTY-RVRY) is required.

Display screen example

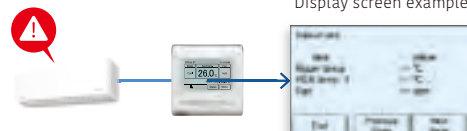



**Model: ASEH07KMCG / ASEH09KMCG / ASEH12KMCG / ASEH14KMCG
ASEH07KMCG-B / ASEH09KMCG-B / ASEH12KMCG-B / ASEH14KMCG-B**



WLAN adapter
(Built-in)



Wireless RC



For ASEH07/09/12KMCG
ASEH07/09/12KMCG-B



For ASEH14KMCG
ASEH14KMCG-B

Specifications

Model name	Indoor unit			ASEH07KMCG ASEH07KMCG-B	ASEH09KMCG ASEH09KMCG-B	ASEH12KMCG ASEH12KMCG-B	ASEH14KMCG ASEH14KMCG-B
	Outdoor unit			AOEH07KMCG	AOEH09KMCG	AOEH12KMCG	AOEH14KMCG
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.0	2.5	3.4	4.2
		Min.-Max.		0.9-3.0	0.9-3.2	0.9-3.9	0.9-4.4
	Heating	Rated		2.5	2.8	4.0	5.4
		Min.-Max.		0.9-3.4	0.9-4.0	0.9-5.3	0.9-6.0
Input Power	Cooling/Heating		kW	0.450 / 0.555	0.650 / 0.620	0.960 / 1.020	1.220 / 1.410
EER	Cooling		W/W	4.43	3.85	3.54	3.44
COP	Heating		W/W	4.52	4.52	3.92	3.83
Pdesign	Cooling/Heating (-10°C)		kW	2.0 / 2.3	2.5 / 2.4	3.4 / 2.5	4.2 / 4.0
SEER	Cooling		W/W	8.40	8.40	7.70	7.10
SCOP	Heating (Average)		W/W	4.60	4.60	4.60	4.10
Energy Efficiency Class	Cooling			A++	A++	A++	A++
	Heating (Average)			A++	A++	A++	A+
Max. Operating Current	Cooling/Heating		A	6.5 / 9.0	6.5 / 9.0	6.5 / 9.0	6.5 / 9.0
Annual Energy Consumption	Cooling		kWh/a	83	104	155	207
	Heating		kWh/a	700	730	761	1,366
Moisture Removal			l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38 / 33 / 29 / 20	40 / 34 / 29 / 20	40 / 35 / 30 / 20	43 / 36 / 30 / 20
	Indoor (Heating)	H/M/L/Q		41 / 35 / 31 / 22	42 / 36 / 31 / 22	42 / 38 / 33 / 22	44 / 39 / 33 / 24
Sound Power Level	Outdoor (Cooling/Heating)	High		46 / 46	46 / 46	50 / 50	50 / 50
	Indoor (Cooling/Heating)	High		54 / 56	55 / 57	55 / 58	57 / 59
	Outdoor (Cooling/Heating)	High		61 / 61	61 / 62	65 / 65	65 / 66
	Indoor/Outdoor (Cooling)	High		650 / 1,650	700 / 1,650	700 / 1,700	770 / 1,680
Airflow Rate	Indoor/Outdoor (Heating)	High	m³/h	720 / 1,450	750 / 1,450	780 / 1,470	820 / 1,580
	Indoor/Outdoor (Cooling)	High	m³/h	720 / 1,450	750 / 1,450	780 / 1,470	820 / 1,580
Net Dimensions	Indoor		mm	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222
H x W x D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290
Weight	Indoor		kg	10	10	10	10
	Outdoor		kg	22	22	24	31
Connection Pipe Diameter (Liquid/Gas)			mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
Drain Hose Diameter (I.D./O.D.)			mm	13.8 / 15 to 16.8	13.8 / 15 to 16.8	13.8 / 15 to 16.8	13.8 / 15 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference			m	15	15	15	15
Operating Range	Cooling		°CDB	-10 to 50	-10 to 50	-10 to 50	-10 to 50
	Heating		°CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge		kg (CO2eq-T)	0.60 (0.405)	0.60 (0.405)	0.70 (0.473)	0.85 (0.574)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

Simple remote controller (without operation mode):

UTY-RHRY

Simple remote controller:

UTY-RSRY

Wireless remote controller:

UTY-LNWX

Communication Kit:

UTY-TWRXZ2

External Connect Kit:

UTY-XWZX

UTY-XWZXZ5

Network Converter for single split (DC power supply type):

UTY-VTGX

Network Converter for single split (AC power supply type):

UTY-VTGXV

Silver Ion filter:

UTR-FA16-5

External input and output PCB*1:

UTY-XCSXZ2



External switch controller:

UTY-TERX

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

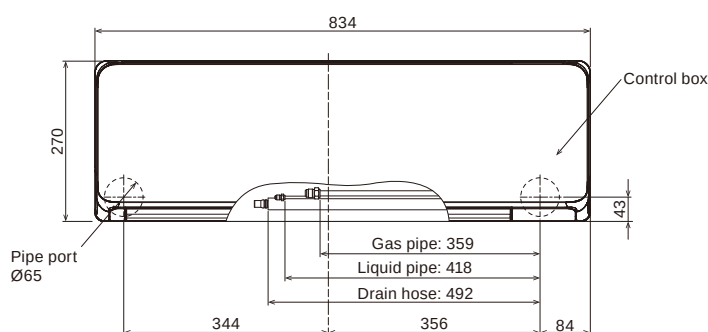

SPLIT

KN
Series

Wall-mounted type

Built-in WLAN adapter model
ECO Range
Compact Size



Elegant & smart square design

An elegant and smart type in the eco range.
The delicate shading of the ridge line makes the unit an accessory for the room.



High energy saving

The size of the heat exchanger has increased to improve performance, making it more powerful despite its compact size.



SEER 7.8* SCOP 4.4

* 07 model

Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



Quiet & Comfort
20 dB(A)
Cooling only


Smart device control

A WLAN adapter is included as standard equipment. By installing the AIRSTAGE mobile app on your smart device, you can check and control the operating status of the air conditioner from anywhere indoors or outdoors.

* See page C-020 for details on smart device control.



AIRSTAGE
Mobile



Highly efficient operation even at high outdoor temperatures

Operation Range
MAX 50°C
(Cooling operation)

Even when installed in areas with high outdoor air temperatures (Max. 50°C*), it is comfortable because it can cool the interior well.

* suction temperature of the outdoor unit





Model: ASEH07KNCA / ASEH09KNCA / ASEH12KNCA



WLAN adapter
(Built-in)



Wireless RC



Specifications

Model name	Indoor unit			ASEH07KNCA	ASEH09KNCA	ASEH12KNCA
	Outdoor unit			AOEH07KNCA	AOEH09KNCA	AOEH12KNCA
Power Source				Single phase, ~230 V, 50 Hz		
Capacity	Cooling	Rated	kW	2.0	2.5	3.4
		Min.-Max.		0.9-2.9	0.9-3.1	0.9-3.8
	Heating	Rated		2.5	2.8	3.8
		Min.-Max.		0.9-3.4	0.9-4.0	0.9-4.8
Input Power	Cooling/Heating		kW	0.50 / 0.58	0.74 / 0.70	1.05 / 1.02
EER	Cooling		W/W	4.00	3.38	3.24
COP	Heating			4.31	4.00	3.73
Pdesign	Cooling/Heating (-10°C)		kW	2.0 / 2.3	2.5 / 2.4	3.4 / 2.5
SEER	Cooling		W/W	7.8	7.4	7.0
SCOP	Heating (Average)			4.4	4.4	4.4
Energy Efficiency Class	Cooling			A++	A++	A++
	Heating (Average)			A+	A+	A+
Max. Operating Current	Cooling/Heating		A	6.5 / 9.0	6.5 / 9.0	6.5 / 9.0
Annual Energy Consumption	Cooling		kWh/a	90	118	170
	Heating			731	763	795
Moisture Removal			l/h	1.0	1.0	1.4
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	36 / 33 / 29 / 20	38 / 35 / 29 / 20	40 / 36 / 32 / 20
	Indoor (Heating)	H/M/L/Q		38 / 33 / 30 / 22	38 / 33 / 30 / 22	39 / 35 / 31 / 22
Sound Power Level	Outdoor (Cooling/Heating)	High		43 / 44	44 / 45	49 / 49
	Indoor (Cooling/Heating)	High		51 / 52	53 / 52	55 / 53
	Outdoor (Cooling/Heating)	High		53 / 54	56 / 56	60 / 61
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	530 / 1,430	580 / 1,430	600 / 1,460
	Indoor/Outdoor (Heating)	High		580 / 1,390	580 / 1,390	600 / 1,360
Net Dimensions	Indoor		mm	270 × 784 × 222	270 × 784 × 222	270 × 784 × 222
H x W x D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290
	Indoor		kg	9	9	9
Weight	Outdoor		kg	22	22	24
	Connection Pipe Diameter (Liquid/Gas)			mm	6.35 / 9.52	6.35 / 9.52
Drain Hose Diameter (I.D./O.D.)				13.8 / 15 to 16.8	13.8 / 15 to 16.8	13.8 / 15 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15
Operating Range	Cooling		°CDB	-10 to 50	-10 to 50	-10 to 50
	Heating			-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)
	Charge		kg (CO2eq-T)	0.57 (0.385)	0.57 (0.385)	0.65 (0.439)

Optional parts



* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wireless remote controller: UTY-LNWX

Silver Ion Filter: UTR-FA16-5

Dimensions

(Unit: mm)

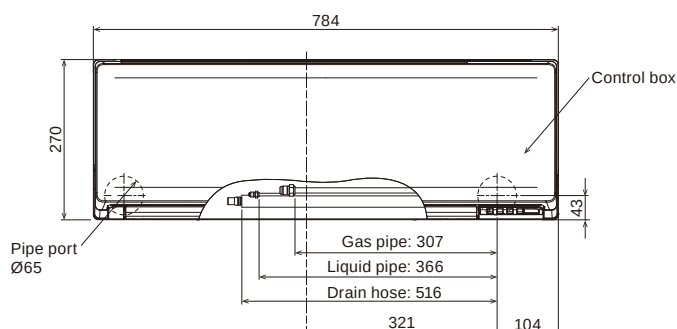

SPLIT

KM
Series

Wall-mounted type

Standard Range

High-Efficiency & Large Rooms



High energy saving

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.



SEER ^{*1}
7.8

SCOP ^{*1}
4.6

^{*1}18 model

Hybrid-heat exchanger

The large hybrid heat exchanger has greatly improved the heat exchange efficiency to achieve top-level SEER and SCOP.




Ø5 mm
High-density
heat exchanger

Ø7 mm
Large heat
exchanger

Ø107 Large cross-flow fan

The large-diameter fan generates air volume efficiently even at reduced power.



Ø107



Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

^{*} For more information about smart device control, please refer to the page C-020.



AIRSTAGE
Mobile

You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.





WLAN
adapter (USB)



Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.



Wide Installation space
Easy Installation



Model: ASEG18KMTE / ASEG24KMTE



Wireless RC



For ASEG18KMTE



For ASEG24KMTE

Specifications

Model name				Indoor unit		ASEG18KMTE		ASEG24KMTE	
				Outdoor unit		AOEG18KMTA		AOEG24KMTA	
Power Source						Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	5.2		7.1			
		Min.-Max.		0.9-6.0		0.9-8.3			
	Heating	Rated		6.3		8.0			
		Min.-Max.		0.9-8.7		0.9-10.1			
Input Power	Cooling/Heating		kW	1.39/1.56		2.08/1.91			
EER	Cooling		W/W	3.74		3.41			
COP	Heating		W/W	4.04		4.19			
Pdesign	Cooling/Heating (-10°C)		kW	5.2/4.8		7.1/7.1			
SEER	Cooling		W/W	7.77		7.30			
SCOP	Heating (Average)			4.60		4.20			
Energy Efficiency Class	Cooling			A++		A++			
	Heating (Average)			A++		A+			
Max. Operating Current	Cooling/Heating		A	9.5/13.5		13.5/16.0			
Annual Energy Consumption	Cooling		kWh/a	234		340			
	Heating			1,460		2,362			
Moisture Removal			l/h	1.7		2.7			
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	45/40/35/29		49/40/35/29			
	Indoor (Heating)	H/M/L/Q		46/40/35/29		49/40/35/29			
Sound Power Level	Outdoor (Cooling/Heating)	High		50/50		54/52			
	Indoor (Cooling/Heating)	High		60/61		65/65			
	Outdoor (Cooling/Heating)	High		65/65		67/66			
	Indoor/Outdoor (Cooling)	High		980/2,350		1,170/3,240			
Airflow Rate	Indoor/Outdoor (Heating)	High	m³/h	1,020/2,100		1,170/2,820			
Net Dimensions	Indoor		mm	280 × 980 × 240		280 × 980 × 240			
H x W x D	Outdoor		mm	632 × 799 × 290		716 × 820 × 315			
Weight	Indoor		kg	12.5		12.5			
	Outdoor		kg	36		42			
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/12.70		6.35/12.70			
Drain Hose Diameter (I.D./O.D.)				13.8/15.8 to 16.7		13.8/15.8 to 16.7			
Max. Pipe Length (Pre-Charge)			m	25 (15)		30 (15)			
Max. Height Difference				20		25			
Operating Range	Cooling		°CDB	-10 to 46		-10 to 46			
	Heating			-15 to 24		-15 to 24			
Refrigerant	Type (Global Warming Potential)		kg (CO2eq-T)	R32 (675)		R32 (675)			
	Charge			1.02 (0.689)		1.32 (0.891)			

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

Simple remote controller (without operation mode):

UTY-RHRY

Simple remote controller:

UTY-RSRY

Wireless remote controller:

UTY-LNWX

Communication Kit:

UTY-TWRXZ2

External input and output PCB*1:

UTY-XCSXZ2

WLAN adapter:

UTY-TFSXF2

UTY-TFSXH3

FG-AC-WIF1Z1

Network Converter for single split (DC power supply type):

UTY-VTGX

Network Converter for single split (AC power supply type):

UTY-VTGXV

Silver Ion filter:

UTR-FA16-5

External switch controller:

UTY-TERX



External Connect Kit:

UTY-XWZXZ5

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

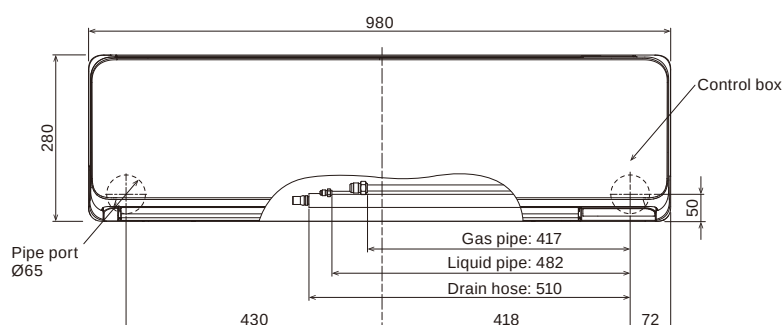

SPLIT

KM
Series

Wall-mounted type

Standard Range

High-Efficiency & Large Rooms



Special Cooling

When it is necessary to be constantly cooled such as rooms with a high heat load, it is possible to operate the cooling with keeping performance even when the outside temperature is low.

* Wired remote controller (UTY-RNRYZ5) is required.

* Please note that we will not provide compensation for any damages suffered to your appliances or data as a result of using this function.

* Please use it in low-humidity environments.
Condensation and other problems may be caused when used in high-humidity environments.



Human sensor


The Human sensor monitors the movements of people in a room and operates the air conditioner at a lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.



Refrigerant cycle monitor (Option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.

*Wired remote controller (UTY-RNRYZ5 or UTY-RVRY) is required.

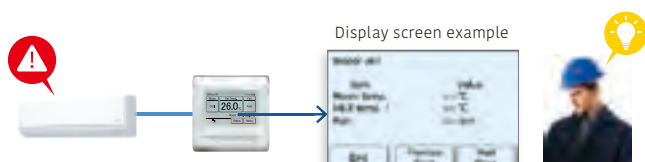

Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

* For more information about smart device control, please refer to the page C-020.



Model: ASEH30KMTB / ASEH36KMTB



Wireless RC



Specifications

Model name	Indoor unit			ASEH30KMTB		ASEH36KMTB	
	Outdoor unit			AOEH30KMTB		AOEH36KMTB	
Power Source				Single phase, ~230V, 50Hz			
Capacity	Cooling	Rated	kW	8.0		9.4	
		Min.-Max.		2.9-9.0		2.9-10.0	
	Heating	Rated		8.8		10.1	
		Min.-Max.		2.2-11.8		2.7-12.6	
Input Power	Cooling/Heating		kW	2.33/2.20		3.16/2.73	
EER	Cooling		W/W	3.43		2.97	
COP	Heating			4.00		3.70	
Pdesign	Cooling/Heating (-10°C)		kW	8.0/6.5		9.4/7.1	
SEER	Cooling		W/W	6.68		6.10	
SCOP	Heating (Average)			4.50		4.50	
Energy Efficiency Class	Cooling			A++		A++	
	Heating (Average)			A+		A+	
Max. Operating Current	Cooling/Heating		A	21.0/21.0		21.5/21.5	
Annual Energy Consumption	Cooling		kWh/a	419		534	
	Heating			1,994		2,189	
Moisture Removal			l/h	2.6		3.8	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	50/44/40/33		50/44/40/33	
	Indoor (Heating)	H/M/L/Q		49/44/39/33		49/44/39/33	
	Outdoor (Cooling/Heating)	High		53/55		55/55	
Sound Power Level	Indoor (Cooling/Heating)	High		65/65		65/65	
	Outdoor (Cooling/Heating)	High		68/69		70/70	
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	1,330/3,750		1,330/3,750	
	Indoor/Outdoor (Heating)	High		1,330/3,750		1,330/3,750	
Net Dimensions	Indoor		mm	340 × 1,150 × 280		340 × 1,150 × 280	
H x W x D	Outdoor		mm	788 × 940 × 320		788 × 940 × 320	
Weight	Indoor		kg	18.5		18.5	
	Outdoor		kg	52.0		52.0	
Connection Pipe Diameter (Liquid/Gas)			mm	9.52/15.88		9.52/15.88	
Drain Hose Diameter (I.D./O.D.)				13.8/15.8 to 16.7		13.8/15.8 to 16.7	
Max. Pipe Length (Pre-Charge)			m	50(30)		50(30)	
Max. Height Difference				30		30	
Operating Range	Cooling		°CDB	-15to46		-15to46	
	Heating			-15to24		-15to24	
Refrigerant	Type (Global Warming Potential)			R32(675)		R32(675)	
	Charge	kg (CO2eq-T)		1.90(1.283)		1.90(1.283)	

Optional parts


* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):	UTY-RVRY	Wireless remote controller:	UTY-LNWX	Network Converter for single split (DC power supply type):	UTY-VTGX
Compact wired remote controller:	UTY-RCRYZ1	Communication Kit:	UTY-TWRXZ2	Network Converter for single split (AC power supply type):	UTY-VTGXV
Wired remote controller (touch panel):	UTY-RNRYZ5	External input and output PCB*1:	UTY-XCSXZ2	Silver Ion filter:	UTR-FA13-3
Wired remote controller:	UTY-RLRY	WLAN adapter:	UTY-TFSXF2	External switch controller:	UTY-TERX
Simple remote controller (without operation mode):	UTY-RHRY		UTY-TFSXH3	External Connect Kit:	UTY-XWZXZ5
Simple remote controller:	UTY-RSRY		FG-AC-WIF1Z1		

*1 It is required when 2 or more external input and output ports are used.

Dimensions

(Unit: mm)

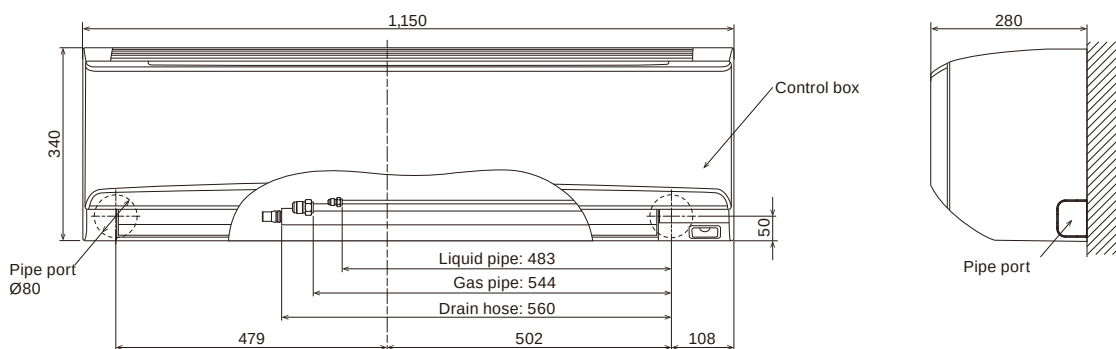

SPLIT

KP
Series

Wall-mounted type

ECO Range
Compact Size



reddot award 2019
winner




Slim & stylish square design

The slim and stylish square design of this indoor unit is realized by using a high-density, multipath heat exchanger and a high-efficiency wind blower.



High energy saving

High-efficiency has been achieved by the lambda-shaped heat exchanger, large cross-flow fan, and the new refrigerant.



SEER
6.7^{*1}
*1: 07/09 models

SCOP
4.1^{*2}
*2: 12 model

Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



22 dB(A)
Cooling only

Smart device control (Option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

* For more information about smart device control, please refer to the page C-020.



AIRSTAGE
Mobile

You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.




WLAN
adapter (USB)



Easy access to the flare pipe connection

Installation when left outlet piping is easier by removable under cover of the indoor unit chassis. Installation when center outlet piping is easier by design change of wall hook bracket.

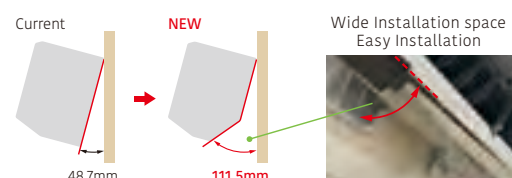



Model: ASEG07KPCE / ASEG09KPCE / ASEG12KPCE



Wireless RC



Specifications

Model name	Indoor unit			ASEG07KPCE	ASEG09KPCE	ASEG12KPCE
	Outdoor unit			AOEG07KPCA	AOEG09KPCA	AOEG12KPCA
Power Source				Single phase, ~230 V, 50 Hz		
Capacity	Cooling	Rated	kW	2.0	2.5	3.4
		Min.-Max.		0.9-2.8	0.9-3.0	0.9-3.7
	Heating	Rated		2.5	2.8	3.8
		Min.-Max.		0.9-3.4	0.9-3.8	0.9-4.8
Input Power	Cooling/Heating		kW	0.48/0.63	0.71/0.79	1.00/1.14
EER	Cooling		W/W	4.17	3.52	3.40
COP	Heating		W/W	3.97	3.54	3.33
Pdesign	Cooling/Heating (-10°C)		kW	2.0/2.2	2.5/2.4	3.4/2.5
SEER	Cooling		W/W	6.70	6.70	6.30
SCOP	Heating (Average)		W/W	4.00	4.00	4.10
Energy Efficiency Class	Cooling			A++	A++	A++
	Heating (Average)			A+	A+	A+
Max. Operating Current	Cooling/Heating		A	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling		kWh/a	104	131	189
	Heating			769	840	853
Moisture Removal			l/h	1.0	1.3	1.8
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	45/38/31/22	45/38/31/22	46/40/33/22
	Indoor (Heating)	H/M/L/Q		45/40/36/26	45/40/36/26	46/40/35/27
Sound Power Level	Outdoor (Cooling/Heating)	High		45/46	47/47	49/51
	Indoor (Cooling/Heating)	High		57/58	58/58	59/59
Airflow Rate	Outdoor (Cooling/Heating)	High	m³/h	57/58	59/59	62/62
	Indoor/Outdoor (Cooling)	High		580/1,650	580/1,650	630/1,700
Net Dimensions	Indoor/Outdoor (Heating)	High		580/1,450	580/1,450	630/1,470
H x W x D	Indoor	mm	270 × 784 × 224	270 × 784 × 224	270 × 784 × 224	
	Outdoor	mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290	
Weight	Indoor	kg	8	8	8	
	Outdoor	kg	23	23	25	
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)			mm	11.8/15.0 to 16.8	11.8/15.0 to 16.8	11.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	
	Heating		-15 to 24	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	0.55 (0.371)	0.55 (0.371)	0.59 (0.398)	

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.



Wireless remote controller: UTY-LNWX

WLAN adapter: UTY-TFSXF2
UTY-TFSXH3

Silver Ion Filter: UTR-FA16-5

Dimensions

(Unit: mm)

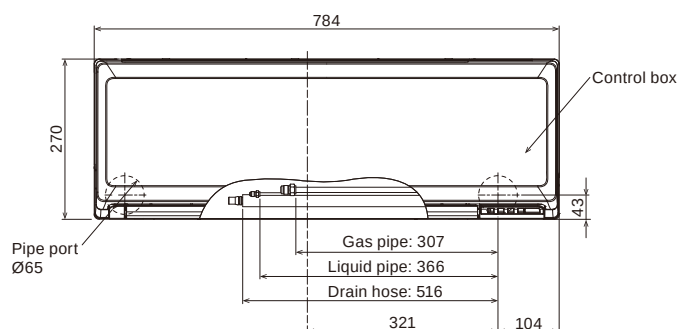

SPLIT

KL
Series

Wall-mounted type

ECO Range

Comfort for Large Rooms




Narrow width & Compact design

Compact and versatile. Powerful airflow is realized despite the 790-mm width compact design for small spaces such as bedrooms or home offices.




Economy operation

Set temperature automatically increases or decreases by 1°C. The thermostat setting is adjusted automatically according to the room temperature to avoid unnecessary cooling or heating.

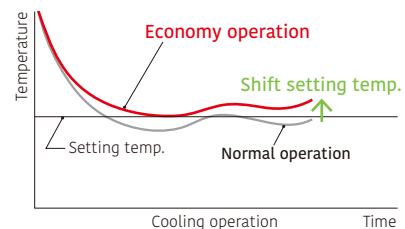

Powerful operation


In powerful operation mode, the compressor operates at maximum speed for 20 minutes to provide a powerful airflow. Rapid cooling and heating makes the room comfortable quickly.

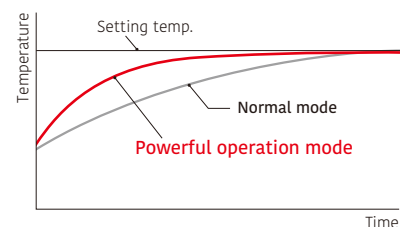

ON-OFF programmable timer

You can set ON/OFF or OFF/ON times depending on your lifestyle needs. (Setting time: 0.5, 1, 1.5, 2, 2.5, -----9.5, 10, 11, 12 hours)

Low ambient operation

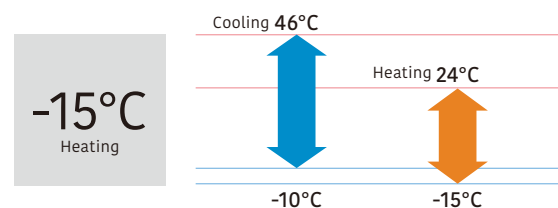



Model: ASEG18KLCA / ASEG24KLCA



Wireless RC



For ASEG18KLCA



For ASEG24KLCA

Specifications

Model name	Indoor unit			ASEG18KLCA		ASEG24KLCA	
	Outdoor unit			AOEG18KLCA		AOEG24KLCA	
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	5.2		7.1	
		Min.-Max.		0.9-5.5		0.9-7.7	
	Heating	Rated		6.3		8.0	
		Min.-Max.		0.6-7.6		0.9-9.0	
Input Power	Cooling/Heating		kW	1.685/1.80		2.42/2.225	
EER	Cooling		W/W	3.09		2.93	
COP	Heating			3.50		3.60	
Pdesign	Cooling/Heating (-10°C)		kW	5.20/4.80		7.10/7.10	
SEER	Cooling		W/W	7.20		7.10	
SCOP	Heating (Average)			4.30		4.00	
Energy Efficiency Class	Cooling			A++		A++	
	Heating (Average)			A+		A+	
Max. Operating Current	Cooling/Heating		A	9.5/13.5		13.5/17.5	
Annual Energy Consumption	Cooling		kWh/a	253		350	
	Heating			1563		2485	
Moisture Removal			l/h	1.9		3.1	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	47/44/40/35		51/45/38/33	
	Indoor (Heating)	H/M/L/Q		50/45/41/37		52/45/41/37	
Sound Power Level	Outdoor (Cooling/Heating)	High		50/56		55/57	
	Indoor (Cooling/Heating)	High		60/65		64/65	
Sound Power Level	Outdoor (Cooling/Heating)	High	61/66		65/67		
	Indoor/Outdoor (Cooling)	High	m³/h	865/1,830		1,040/2,885	
Airflow Rate	Indoor/Outdoor (Heating)	High		995/2,265		1,040/3,030	
Net Dimensions	Indoor		mm	293 × 790 × 249		293 × 790 × 249	
H x W x D	Outdoor		mm	542 × 799 × 290		632 × 799 × 290	
Weight	Indoor		kg	9.5		10.0	
	Outdoor		kg	33		38	
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52		6.35/12.70	
Drain Hose Diameter (I.D./O.D.)				13.8/15.8 to 16.7		13.8/15.8 to 16.7	
Max. Pipe Length (Pre-Charge)			m	25 (15)		30 (15)	
Max. Height Difference				20		25	
Operating Range	Cooling		°CDB	-10 to 46		-10 to 46	
	Heating			-15 to 24		-15 to 24	
Refrigerant	Type (Global Warming Potential)		kg (CO2eq-T)	R32 (675)		R32 (675)	
	Charge			0.85 (0.574)		1.10 (0.743)	

Optional parts



* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wireless remote controller: UTY-LNWX

Silver Ion Filter: UTR-FA16-5

Dimensions

(Unit: mm)

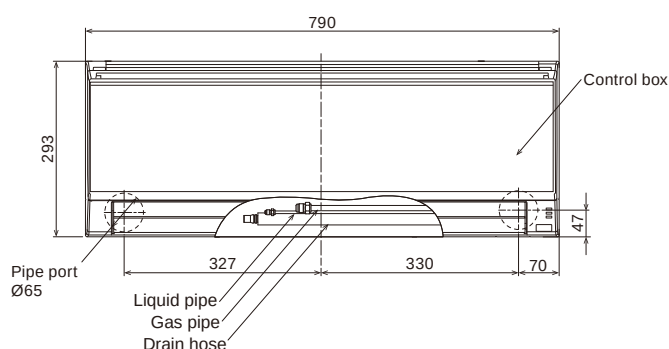

SPLIT

KL
Series

Wall-mounted type

ECO Range

Cooling-enhanced type



Highly efficient operation even at high outdoor temperatures

Even when installed in areas with high outdoor air temperatures (Max. 52°C*), it is comfortable because it can cool the interior well.

*suction temperature of the outdoor unit



SEER
7.1*
*07 model

Operation Range
MAX 52°C
(Cooling operation)



MINIMAL SMART design

The new smart design eliminates mechanical elements and offers a sophisticated, premium impression. Its compact size, with a width of 770 mm, allows for flexible installation in limited room space.



Comfortable airflow & Quiet operation

The large louver and the new air-blowing structure create a comfortable air flow that spreads all the way down to the user's feet with quiet operation.



Quiet & Comfort
21 dB(A)
Cooling only

Smart device control (option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

* For more information about smart device control, please refer to the page C-020.



AIRSTAGE
Mobile

You need to install the AIRSTAGE Mobile app on your smart device in order to control the air conditioner.




WLAN
adapter (USB)





Model: ASEH07KLTA / ASEH09KLTA / ASEH12KLTA

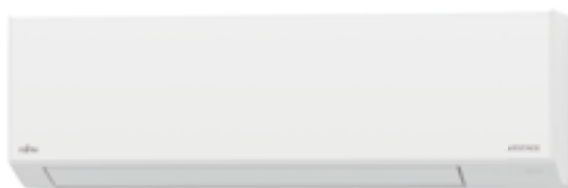

Wireless RC



Specifications

Model name	Indoor unit			ASEH07KLTA	ASEH09KLTA	ASEH12KLTA
	Outdoor unit			AOEH07KLTA	AOEH09KLTA	AOEH12KLTA
Power Source				Single phase, ~230 V, 50 Hz		
Capacity	Cooling	Rated	kW	2.0	2.5	3.4
		Min.-Max.		0.9-2.8	0.9-3.0	0.9-3.7
	Heating	Rated		2.4	2.5	3.4
		Min.-Max.		0.9-3.3	0.9-3.5	0.9-3.7
Input Power	Cooling/Heating		kW	0.54 / 0.64	0.76 / 0.67	1.05 / 0.915
EER	Cooling		W/W	3.70	3.29	3.24
COP	Heating			3.75	3.73	3.72
Pdesign	Cooling/Heating (-10°C)		kW	2.0 / 2.2	2.5 / 2.3	3.4 / 2.5
SEER	Cooling		W/W	7.10	6.80	6.70
SCOP	Heating (Average)			4.10	4.10	4.10
Energy Efficiency Class	Cooling			A++	A++	A++
	Heating (Average)			A+	A+	A+
Max. Operating Current	Cooling/Heating		A	6.0 / 6.0	6.0 / 6.0	7.0 / 7.0
Annual Energy Consumption	Cooling		kWh/a	99	129	178
	Heating			752	786	854
Moisture Removal			l/h	0.18	0.55	1.26
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	41 / 36 / 29 / 21	43 / 36 / 29 / 21	43 / 37 / 30 / 21
	Indoor (Heating)	H/M/L/Q		41 / 37 / 32 / 23	43 / 37 / 32 / 23	43 / 37 / 32 / 23
Outdoor (Cooling/Heating)	High	47 / 47		47 / 47	50 / 50	
Sound Power Level	Indoor (Cooling/Heating)	High		54 / 55	55 / 55	55 / 56
	Outdoor (Cooling/Heating)	High		56 / 57	58 / 57	60 / 61
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	600 / 1,650	620 / 1,650	620 / 1,700
	Indoor/Outdoor (Heating)	High		600 / 1,450	620 / 1,450	640 / 1,470
Net Dimensions	Indoor		mm	250 × 770 × 218	250 × 770 × 218	250 × 770 × 218
H x W x D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290
	Indoor		kg	7.0	7.0	7.5
Weight	Outdoor		kg	19	19	22
	Connection Pipe Diameter (Liquid/Gas)			mm	6.35 / 9.52	6.35 / 9.52
Drain Hose Diameter (I.D./O.D.)			mm	13.8 / 15 to 16.8	13.8 / 15 to 16.8	13.8 / 15 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15
Operating Range	Cooling		°CDB	10 to 52	10 to 52	10 to 52
	Heating			-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)
	Charge			kg (CO2eq-T)	0.53(0.358)	0.60(0.405)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wireless remote controller: UTY-LNWX



WLAN adapter: UTY-TFSXF2

UTY-TFSXH3

Silver Ion Filter: UTR-FA16-5

Dimensions

(Unit: mm)

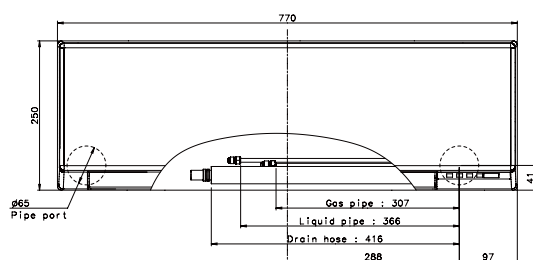

SPLIT

Compact Cassette

Compact 4-way
Flow Range
Compact Size




Compact and stylish panel design

The compact and stylish panel fits nicely into a grid-type ceiling. Its linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.



Easy maintenance

You can access the unit for maintenance simply by removing a ceiling panel next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.

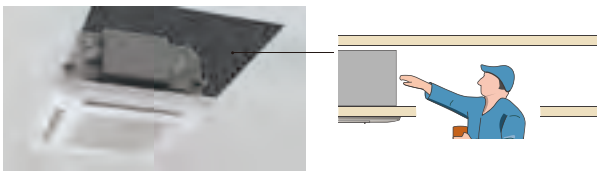

The air inlet grille can be installed to open in any direction for easy maintenance.



Flexible installation

The unit fits nicely into the decor of a grid-type ceiling and can be installed near the lighting or a ventilation opening.



Link up with a variety of central control system (option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.





Model: AUXG09KVLA / AUXG12KVLA / AUXG14KVLA / AUXG18KVLA / AUXG22KVLA / AUXG24KVLA



For AUXG9/12/14KVLA

For AUXG18/22KVLA

For AUXG24KVLA

Specifications

Model name	Indoor unit			AUXG09KVLA	AUXG12KVLA	AUXG14KVLA	AUXG18KVLA	AUXG22KVLA	AUXG24KVLA
	Outdoor unit			AOEG09KBTB	AOEG12KBTB	AOEG14KBTB	AOEG18KBTB	AOEG22KBTB	AOEG24KBTB
Power Source				Single phase, ~230 V, 50 Hz					
Capacity	Cooling	Rated	kW	2.5	3.5	4.3	5.2	6.0	6.8
		Min.-Max.		0.9-3.2	0.9-4.4	0.9-5.4	0.9-5.9	0.9-6.7	0.9-8.0
	Heating	Rated		3.2	4.1	5.0	6.0	7.0	7.5
		Min.-Max.		0.9-4.7	0.9-5.7	0.9-6.5	0.9-7.5	0.9-8.0	0.9-9.1
Input Power	Cooling/Heating		kW	0.55/0.79	0.93/1.08	1.28/1.32	1.60/1.66	1.82/1.87	2.21/2.03
EER	Cooling		W/W	4.57	3.76	3.36	3.25	3.30	3.08
COP	Heating			4.05	3.80	3.79	3.61	3.74	3.69
Pdesign	Cooling/Heating (-10°C)		kW	2.5/2.6	3.5/3.4	4.3/3.8	5.2/4.4	6.0/4.8	6.8/6.0
SEER	Cooling		W/W	6.70	6.60	6.50	6.60	6.60	6.10
SCOP	Heating (Average)			4.40	4.30	4.40	4.20	4.30	4.00
Energy Efficiency Class	Cooling			A++	A++	A++	A++	A++	A++
	Heating (Average)			A+	A+	A+	A+	A+	A+
Max. Operating Current	Cooling/Heating		A	7.9/7.9	9.7/9.7	10.2/10.2	12.1/12.1	12.6/12.6	13.6/13.6
Annual Energy Consumption	Cooling		kWh/a	131	186	231	275	318	390
	Heating			826	1,106	1,208	1,466	1,562	2,097
Moisture Removal			l/h	0.6	1.2	1.5	2.2	2.6	2.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	33/31/29/27	37/34/30/27	38/34/30/27	38/34/30/26	44/42/36/30	49/44/36/30
	Indoor (Heating)	H/M/L/Q		34/32/29/27	37/34/31/29	43/38/34/30	43/38/34/30	45/43/40/33	49/45/40/33
	Outdoor (Cooling/Heating)	High		46/46	47/47	49/49	50/50	51/51	53/54
Sound Power Level	Indoor (Cooling/Heating)	High	dB(A)	46/47	49/49	50/55	50/55	56/57	59/61
	Outdoor (Cooling/Heating)	High		59/59	61/61	62/62	62/62	63/63	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	540/1,480	600/1,580	680/1,670	680/2,160	830/2,240	930/2,700
	Indoor/Outdoor (Heating)	High		540/1,410	600/1,520	800/1,580	800/1,830	860/1,960	930/2,700
Net Dimensions	Indoor	mm		245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
H × W × D	Outdoor	mm		542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315
Weight	Indoor	kg		15	15	15	15	16	16
	Outdoor	kg		32	33	33	36	38	42
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	6.35/12.70
Drain Hose Diameter (I.D./O.D.)				25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)			m	20 (15)	25 (15)	25 (15)	30 (20)	30 (20)	30 (20)
Max. Height Difference				15	20	20	20	25	25
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge			kg (CO2eq-T)	0.85 (0.574)	0.85 (0.574)	0.85 (0.574)	1.02 (0.689)	1.25 (0.844)
Cassette Grille	Model name			UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W
	Dimensions (H × W × D)			mm	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620
	Weight			kg	2.3	2.3	2.3	2.3	2.3

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

UTY-RNNYM

UTY-RVNYM

Simple remote controller (without operation mode):

UTY-RHRY

Simple remote controller:

UTY-RSRY

Wireless remote controller: UTY-LNTY

External switch controller: UTY-TERX

WLAN adapter:

UTY-TFSXZ1

FG-RC-WIF1Z2

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

UTG-UFYF-W

Network Converter for single split (DC power supply type): UTY-VTGX

Network Converter for single split (AC power supply type): UTY-VTGV

Insulation Kit for high humidity:

UTZ-KXGC

External input and output PCB:

UTY-XCSX

External input and output PCB box:

UTZ-GXRA

Silver Ion Filter:

UTD-HFAA

Fresh Air Intake Kit:






UTZ-VXAA

External Connect Kit:

UTY-XWZXZG

Dimensions

(Unit: mm)

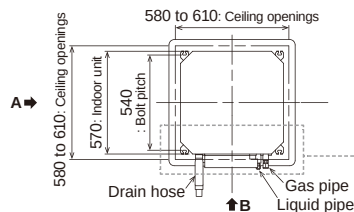

SPLIT

UTG-UKGA-B
Black Grille

Cassette

Circular Flow Range
Comfort for Large Rooms



(30/36/
45/54)


Unique circular flow design

The Cassette model realizes a Circular Flow to blow a large airflow in a 360° direction by using a high-performance DC fan motor, turbo fan, and a unique seamless airflow louver design.


Individual louver control

Each louver can be controlled individually with a wired remote controller equipped with a touch panel to provide different directional airflows according to the room layout.

*Wired remote controller (touch panel) (UTY-RNRYZ3) only



Airflows avoid blowing cool air directly at the occupants in the room, providing more comfortable air conditioning.




Provides efficient air conditioning based on the room layout

The Human sensor yields more energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

Compact and lightweight outdoor unit

The outdoor units for the 45,000 BTU and 54,000 BTU models have been completely redesigned. Easier installation is achieved for this compact and lightweight outdoor unit.

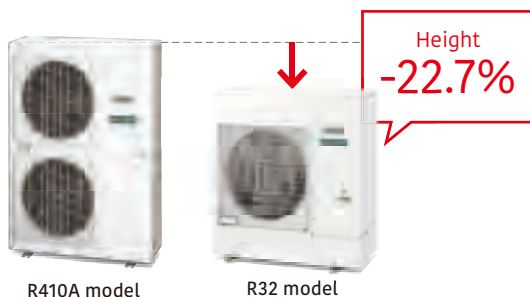

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.




Various cassette grilles

Both black and white grilles are available. Three types of grilles are available: a white grille with a remote controller; a white grille without a remote controller; and a black grille without a remote controller. Select to match the atmosphere and/or usage of the room.





**Model: AUXG18KRLB / AUXG22KRLB / AUXG24KRLB / AUXG30KRLB / AUXG36KRLB / AUXG45KRLB / AUXG54KRLB
AUXG36KRLB [3-phase] / AUXG45KRLB [3-phase] / AUXG54KRLB [3-phase]**

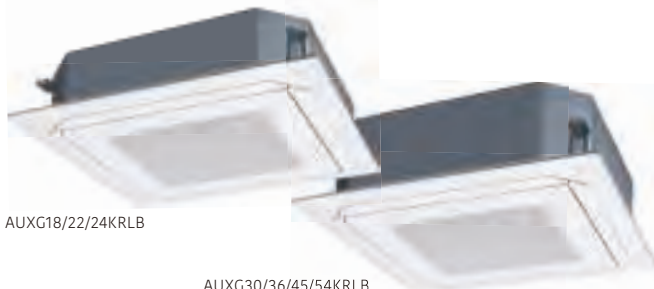

AUXG18/22/24KRLB

AUXG30/36/45/54KRLB



For AUXG18/22KRLB

For AUXG24KRLB

For AUXG30/36KRLB

For AUXG45/54KRLB

Specifications

Model name	Indoor unit			AUXG18KRLB	AUXG22KRLB	AUXG24KRLB	AUXG30KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB	
	Outdoor unit			AOEG18KBTB	AOEG22KBTB	AOEG24KBTB	AOEG30KBTB	AOEG36KBTB	AOEG45KBTB	AOEG54KBTB	AOEG36KRTA	AOEG45KRTA	AOEG54KRTA	
Power Source				Single phase, ~230 V, 50 Hz							3-phase, ~400 V, 50 Hz			
Capacity	Cooling	Rated	kW	5.2	6.0	6.8	8.5	9.5	12.1	13.4	9.5	12.1	13.4	
		Min.-Max.		0.9-5.9	0.9-6.7	0.9-8.0	2.8-10.0	2.8-11.2	4.0-14.0	4.5-14.5	2.8-11.2	4.0-14.0	4.5-14.5	
	Heating	Rated		6.0	7.0	7.5	10.0	10.8	13.5	13.7	10.8	13.5	15.5	
		Min.-Max.		0.9-7.5	0.9-8.0	0.9-9.1	2.7-11.2	2.7-12.7	4.2-16.2	4.7-16.5	2.7-12.7	4.2-16.2	4.7-16.5	
Input Power		Cooling/Heating	kW	1.36/1.58	1.71/1.82	1.89/1.90	2.44/2.51	2.91/2.45	3.61/3.21	4.41/4.16	2.91/2.45	3.61/3.21	4.41/4.16	
EER		Cooling	W/W	3.82	3.51	3.60	3.49	3.26	3.35	3.04	3.26	3.35	3.04	
COP		Heating		3.80	3.85	3.95	3.98	4.40	4.20	3.73	4.40	4.20	3.73	
Pdesign		Cooling/Heating (-10°C)	kW	5.2/4.4	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	12.1/9.2	13.4/9.5	9.5/8.7	12.1/9.2	13.4/9.5	
SEER		Cooling	W/W	7.00	7.00	6.60	6.70	6.55	6.65	6.53	6.55	6.65	6.53	
SCOP		Heating (Average)		4.30	4.40	4.20	4.30	4.30	4.33	4.31	4.30	4.33	4.31	
Energy Efficiency Class		Cooling		A++	A++	A++	A++	A++	-	-	A++	-	-	
Class		Heating (Average)		A+	A+	A+	A+	A+	-	-	A+	-	-	
nc			%	-	-	-	-	-	263.0	258.2	-	263.0	258.2	
nh				-	-	-	-	-	170.2	169.4	-	170.2	169.4	
Max. Operating Current		Cooling/Heating	A	12.1/12.1	12.6/12.6	13.6/13.6	22.6/22.6	22.6/22.6	28.5/28.5	28.5/28.5	10.5/10.5	14.0/14.0	14.0/14.0	
Annual Energy Consumption		Cooling	kWh/a	260	300	360	444	507	-	-	507	-	-	
		Heating		1,431	1,527	1,999	2,601	2,828	-	-	2,828	-	-	
Moisture Removal				I/h	1.5	2.2	2.7	2.5	3.3	4.5	5.0	3.3	4.5	5.0
Sound Pressure Level		Indoor (Cooling)	H/M/L/Q	33/32/31/28	33/32/31/28	35/33/32/29	40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36	
		Indoor (Heating)	H/M/L/Q	33/32/31/28	33/32/31/28	35/33/32/29	40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36	
Sound Power Level		Outdoor (Cooling/Heating)	High	50/50	51/51	53/54	53/55	55/55	57/57	57/59	55/55	57/57	57/59	
		Indoor (Cooling/Heating)	High	47/47	49/49	49/49	54/54	58/58	60/60	61/61	58/58	60/60	61/61	
		Outdoor (Cooling/Heating)	High	62/62	63/63	65/66	68/69	70/70	71/71	73/73	70/70	71/71	73/73	
Airflow Rate		Indoor/Outdoor (Cooling)	High	1,050/2,160	1,050/2,240	1,150/2,700	1,600/3,750	1,870/3,750	2,000/4,450	2,100/4,450	1,870/3,750	2,000/4,450	2,100/4,450	
		Indoor/Outdoor (Heating)	High	1,050/1,830	1,050/1,960	1,150/2,700	1,600/3,750	1,870/3,750	2,000/4,450	2,100/4,450	1,870/3,750	2,000/4,450	2,100/4,450	
Net Dimensions		Indoor	mm	246 × 840 × 840	246 × 840 × 840	246 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	
H x W x D		Outdoor	mm	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	
Weight		Indoor	kg	23	23	24	26	29	29	29	29	29	29	
		Outdoor	kg	36	38	42	52	52	67	67	53	67	67	
Connection Pipe Diameter (Liquid/Gas)				mm	6.35/12.70	6.35/12.70	6.35/12.70	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	
Drain Hose Diameter (I.D./O.D.)				mm	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	
Max. Pipe Length (Pre-Charge)				m	30 (20)	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	
Max. Height Difference					20	25	25	30	30	30	30	30	30	
Operating Range		Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	
		Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24		
Refrigerant		Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	
		Charge	kg (CO2eq-T)	1.02 (0.689)	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)	
Cassette Grille		Variation	UTG-UKYA-W: White wired remote controller (touch panel) UTG-UKYC-W: White/UTG-UKYA-B*: Black									UTG-UKYA-W: White wired remote controller (touch panel) UTG-UKYC-W: White/UTG-UKYA-B*: Black		
		Dimensions (H × W × D)	mm	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	
		Weight	kg	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	

*1: IR Receiver Kit and Human Sensor Kit cannot be connected.






Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):	UTY-RVRY	WLAN adapter:	UTY-TFSXZ1	Cassette Grille:	UTG-UKYA-B
Compact wired remote controller:	UTY-RCRYZ1		FG-RC-WIF1J2		UTG-UKYA-W
Wired remote controller (touch panel):	UTY-RNRYZ5		UTY-TFSXJ3		UTG-UKYC-W
Wired remote controller:	UTY-RLRY		FG-AC-WIF1Z1	Network Converter for single split (DC power supply type):	UTY-VTGX
	UTY-RNNYM	External input and output PCB:	UTY-XCSX	Network Converter for single split (AC power supply type):	UTY-VTGXV
	UTY-RVNYM	External input and output PCB box:	UTZ-GXRA	Silver Ion Filter:	UTD-HFRA
Simple remote controller (without operation mode):	UTY-RHRY	Insulation Kit for high humidity:	UTZ-KXRA	External Connect Kit:	UTY-XWZXZG
Simple remote controller:	UTY-RSRY	Fresh Air Intake Kit:	UTZ-VXRA		
Human Sensor Kit:	UTY-SHZXC	Wide Panel:	UTG-AKXA-W	(Outdoor unit 30/36/45/54)	
External switch controller:	UTY-TERX	Panel Spacer:	UTG-BKXA-W	External Connect Kit:	UTY-XWZXZ3
IR receiver unit	UTY-LBTYC	Air Outlet Shutter Plate:	UTR-YDZK		

Dimensions

(Unit: mm)



	AUXG 18/22/24KRLB	AUXG 30/36/45/54KRLB
a	256	298
b	56	98

SPLIT

Slim Duct

Slim Design



Slim design

The slim design fits nicely into narrow spaces under the ceiling. Drain hose as standard accessory



Height
198 mm
Built-in drain pump

Compact and lightweight outdoor unit

The compact and lightweight outdoor unit offers greater flexibility in the choice of installation location. This makes it easier to use this outdoor unit.



Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa. The static pressure range can be changed by a remote controller.



Static pressure range
0 to 90 Pa

Auto Louver Grille Kit (Option)

The optional clean-looking flat Auto louver blends into any interior and provides a comfortable airflow.



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.





Model: ARXG09KLLAP / ARXG12KLLAP / ARXG14KLLAP / ARXG18KLLAP



ARXG09/12/14KLLAP



ARXG18KLLAP



For ARXG09/12/14KLLAP For ARXG18KLLAP

Specifications

Model name	Indoor unit			ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP
	Outdoor unit			AOEG09KBTB	AOEG12KBTB	AOEG14KBTB	AOEG18KBTB
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.5	3.5	4.3	5.2
		Min.-Max.		0.9-3.2	0.9-4.4	0.9-5.4	0.9-5.9
	Heating	Rated		3.2	4.1	5.0	6.0
		Min.-Max.		0.9-4.7	0.9-5.7	0.9-6.5	0.9-7.5
Input Power	Cooling/Heating		kW	0.60/0.79	0.93/1.08	1.28/1.32	1.55/1.62
EER	Cooling		W/W	4.17	3.76	3.36	3.35
COP	Heating			4.05	3.80	3.79	3.70
Pdesign	Cooling/Heating (-10°C)		kW	2.5/2.6	3.5/3.4	4.3/3.8	5.2/4.4
SEER	Cooling		W/W	6.20	6.10	5.80	6.20
SCOP	Heating			4.30	4.00	3.90	4.10
Energy Efficiency Class	Cooling			A++	A++	A+	A++
	Heating			A+	A+	A	A+
Max. Operating Current	Cooling/Heating		A	7.9/7.9	9.7/9.7	10.2/10.2	12.1/12.1
Annual Energy Consumption	Cooling		kWh/a	141	201	259	293
	Heating			845	1,189	1,362	1,501
Moisture Removal			l/h	0.7	1.3	1.5	2.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	28/27/26/25	29/28/26/25	32/30/28/26	32/30/29/27
	Indoor (Heating)	H/M/L/Q		28/26/25/24	29/28/26/24	32/30/28/25	32/30/29/27
	Outdoor (Cooling/Heating)	High		46/46	47/47	49/49	50/50
Sound Power Level	Indoor (Cooling/Heating)	High		57/57	58/58	60/60	58/58
	Outdoor (Cooling/Heating)	High		59/59	61/61	62/62	62/62
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	600/1,480	650/1,580	800/1,670	940/2,160
	Indoor/Outdoor (Heating)	High		600/1,410	650/1,520	800/1,580	940/1,830
Static pressure range (Standard)			Pa	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)
Net Dimensions	Indoor		mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620
H x W x D	Outdoor		mm	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290
Weight	Indoor		kg	17	17	17	20
	Outdoor		kg	32	33	33	36
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70
Drain Hose Diameter (I.D./O.D.)				25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)			m	20 (15)	25 (15)	25 (15)	30 (20)
Max. Height Difference				15	20	20	20
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	0.85 (0.574)	0.85 (0.574)	0.85 (0.574)	1.02 (0.689)	

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

Compact wired remote controller:

Wired remote controller (touch panel):

Wired remote controller:

UTY-RVRY

UTY-RCRYZ1

UTY-RNRYZ5

UTY-RLRY

UTY-RNNYM

UTY-RVNYM

UTY-RHRY

UTY-RSRY

WLAN adapter:

UTY-TFSXZ1

FG-RC-WIF122

UTY-TFSXJ3

FG-AC-WIF121

UTD-HFTA (09-14)

UTD-HFTB (18)

UTY-TERX

IR receiver unit:

UTY-TFSXZ1

FG-RC-WIF122

UTY-TFSXJ3

FG-AC-WIF121

UTD-HFTA (09-14)

UTD-HFTB (18)

UTY-TERX

UTY-LBTYM

Network Converter for single split (DC power supply type): UTY-VTGX

Network Converter for single split (AC power supply type): UTY-VTGXV

External connect Kit:

Remote sensor unit:

Auto Louver Grille Kit:

UTY-VTGX

UTY-VTGXV

UTY-XWZXZG


UTY-XSXXZ1

UTD-GXTA-W (09-14)

UTD-GXTB-W (18)


Dimensions

(Unit: mm)

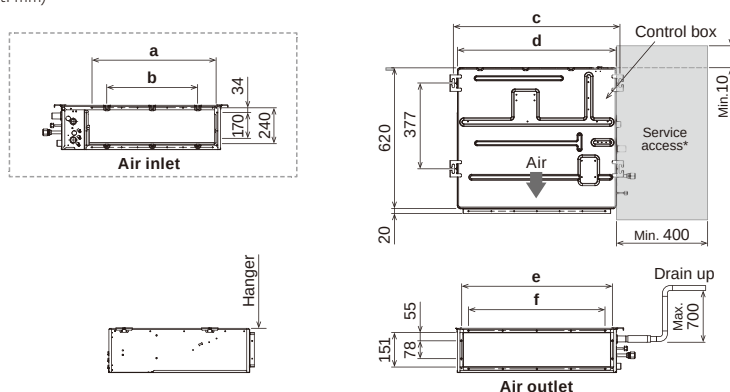

	ARXG 09 / 12 / 14KLLAP	ARXG18KLLAP
a	574	774
b	P200×2=400	P200×3=600
c	734	934
d	700	900
e	650	850
f	P100×6=600	P100×8=800

*The design of the service access depends on the installation method. Refer to the installation manual for more information.



SPLIT


Medium Static Pressure Duct

High-Efficiency & Comfort




Slim & Compact design

The new product has reduced the height to 240 mm, making it more compact. The slim design fits nicely into narrow spaces under the ceiling.

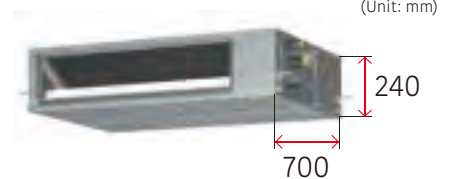

High energy saving

The new model has achieved high energy efficiency rank with a compact design.



SEER
6.50^{*1}
*1: 12/22 models

SCOP
4.20^{*2}
*2: 12/22/24 models

Easy maintenance


The indoor units have large panels on both sides providing easy maintenance in narrow spaces.



Easy inspection of drain hose
The whole drain hose can be removed for easy replacement and cleaning.



Easy cleaning of the heat exchanger



Filter change
Filter can be installed and removed easily.
* Long life filter is available as optional parts.

Drain hose as standard

A drain hose is a standard accessory, making it easy to design drainage even in narrow spaces under the ceiling.



Wide range of static pressures

Static pressures can be changed in the range of 30 to 150 Pa.

Static pressure range
30 to 150 Pa



Model: ARXH12KMTAP / ARXH14KMTAP / ARXH18KMTAP / ARXH22KMTAP / ARXH24KMTAP



ARXH12/14/18KMTAP



ARXH22/24KMTAP



for ARXH12/14KMTAP For ARXH18/22KMTAP For ARXH24KMTAP

Specifications

Model name	Indoor unit			ARXH12KMTAP	ARXH14KMTAP	ARXH18KMTAP	ARXH22KMTAP	ARXH24KMTAP
	Outdoor unit			AOEG12KBTB	AOEG14KBTB	AOEG18KBTB	AOEG22KBTB	AOEG24KBTB
Power Source				Single phase, ~230 V, 50 Hz				
Capacity	Cooling	Rated	kW	3.5	4.3	5.2	6.0	6.8
		Min.-Max.		0.9-4.4	0.9-5.4	0.9-5.9	0.9-6.7	0.9-8.0
	Heating	Rated		4.1	5.0	6.0	7.0	7.5
		Min.-Max.		0.9-5.7	0.9-6.5	0.9-7.5	0.9-8.0	0.9-9.1
Input Power	Cooling/Heating		kW	0.930 / 1.080	1.260 / 1.320	1.580 / 1.740	1.67 / 1.84	1.89 / 1.87
EER	Cooling		W/W	3.76	3.40	3.30	3.60	3.60
COP	Heating			3.80	3.79	3.45	3.80	4.01
Pdesign	Cooling/Heating (-10°C)		kW	3.5 / 3.4	4.3 / 3.8	5.2 / 4.4	6.0 / 4.8	6.8 / 6.0
SEER	Cooling		W/W	6.50	6.10	6.20	6.50	6.40
SCOP	Heating (Average)			4.20	4.00	4.10	4.20	4.20
Energy Efficiency Class	Cooling			A++	A++	A++	A++	A++
	Heating (Average)			A+	A+	A+	A+	A+
Max. Operating Current	Cooling/Heating		A	9.7 / 9.7	10.2 / 10.2	12.1 / 12.1	12.6 / 12.6	13.6 / 13.6
Annual Energy Consumption	Cooling		kWh/a	196	255	301	331	380
	Heating			1,133	1,330	1,501	1,598	1,999
Moisture Removal			l/h	1.3	1.3	2.0	1.5	2.2
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	29 / 27 / 25 / 23	32 / 29 / 27 / 25	33 / 30 / 28 / 26	32 / 28 / 25 / 24	34 / 30 / 28 / 26
	Indoor (Heating)	H/M/L/Q		29 / 27 / 25 / 23	32 / 29 / 27 / 25	33 / 30 / 28 / 26	32 / 28 / 25 / 24	34 / 30 / 28 / 26
	Outdoor (Cooling/Heating)	High		47 / 47	49 / 49	50 / 50	51 / 51	53 / 54
Sound Power Level	Indoor (Cooling/Heating)	High		58 / 58	59 / 59	60 / 60	58 / 58	60 / 60
	Outdoor (Cooling/Heating)	High		61 / 61	62 / 62	62 / 62	63 / 63	65 / 66
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	650 / 1,580	800 / 1,670	840 / 2,160	1,150 / 2,240	1,230 / 2,700
	Indoor/Outdoor (Heating)	High		650 / 1,520	800 / 1,580	840 / 1,830	1,150 / 1,960	1,230 / 2,700
Static pressure range (Standard)			Pa	30 to 150 (40)	30 to 150 (40)	30 to 150 (40)	30 to 150 (40)	30 to 150 (50)
Net Dimensions	Indoor		mm	240 × 700 × 700	240 × 700 × 700	240 × 700 × 700	240 × 1,000 × 700	240 × 1,000 × 700
H x W x D	Outdoor		mm	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315
Weight	Indoor		kg	24	24	24	31	31
	Outdoor		kg	33	33	36	38	42
Connection Pipe Diameter (Liquid/Gas)			mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.70	6.35 / 12.70
Drain Hose Diameter (I.D./O.D.)				25 / 32	25 / 32	25 / 32	25 / 32	25 / 32
Max. Pipe Length (Pre-Charge)			m	25 (15)	25 (15)	30 (20)	30 (20)	30 (20)
Max. Height Difference				20	20	20	25	25
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	0.85 (0.574)	0.85 (0.574)	1.02 (0.689)	1.25 (0.844)	1.25 (0.844)	

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Silver ion filter:

UTD-HFNC (12/14/18)

External input and output PCB:

UTY-XCSX

Compact wired remote controller:

UTY-RCRYZ1

Long-life filter:

UTD-HFNB (22/24)

External input and output PCB bracket:

UTZ-GXDA

Wired remote controller (touch panel):

UTY-RNRYZ5

MODBUS converter:

UTD-LFDC (12/14/18)

Network Converter for single split (DC power supply type):

UTY-VTGX

Wired remote controller:

UTY-RLRY

UTD-LFDB (22/24)

Network Converter for single split (AC power supply type):

UTY-VTGXV

Simple remote controller (without operation mode):

UTY-RHRY

KNX converter:

UTY-VMSX

External Connect Kit:

UTY-XWZXZG

Simple remote controller:

UTY-RSRY

WLAN adapter:

UTY-VKSX

IR receiver unit:

UTY-LBTYM

Remote sensor unit:

UTY-XSZX

UTY-TFSXZ1


UTY-TFSXJ3

External switch controller:

UTY-TERX

Dimensions

(Unit: mm)

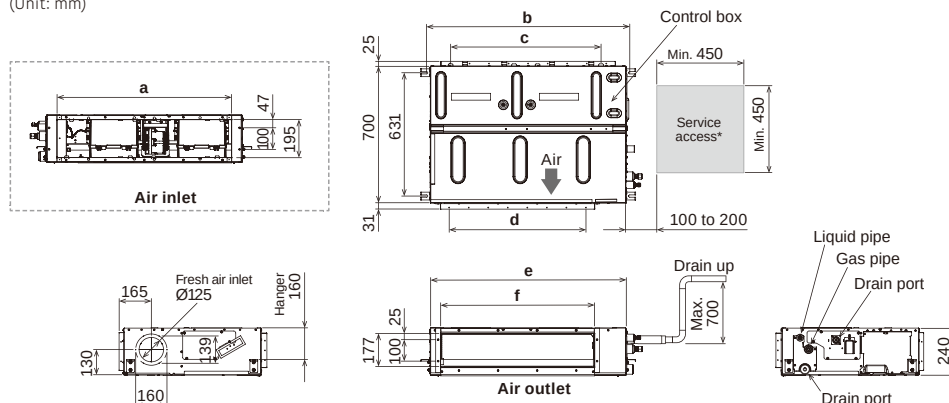

	ARXH 12 / 14 / 18 KMTAP	ARXH 22 / 24 KMTAP
a	650	895
b	740	1,040
c	P100 × 5 = 500	P100 × 8 = 800
d	P100 × 5 = 500	P100 × 7 = 700
e	700	1,000
f	490	790

*The design of the service access depends on the installation method. Refer to the installation manual for more information.

SPLIT

Medium Static Pressure Duct

High-Efficiency & Comfort



Slim & Compact design


The new product has reduced the height to 240 mm, making it more compact. The slim design fits nicely into narrow spaces under the ceiling.



(Unit: mm)

High energy saving

The new model has achieved high energy efficiency rank with a compact design.



SEER
6.23^{*1}
*1: 30 model

SCOP
4.10^{*2}
*2: 36 model

Easy maintenance


The indoor units have large panels on both sides providing easy maintenance in narrow spaces.



Easy inspection of drain hose
The whole drain hose can be removed for easy replacement and cleaning.



Easy cleaning of the heat exchanger



Filter change
Filter can be installed and removed easily.

* Long life filter is available as optional parts.

Drain hose as standard

A drain hose is a standard accessory, making it easy to design drainage even in narrow spaces under the ceiling.



Wide range of static pressures

Static pressures can be changed in the range of 30 to 150 Pa.

Static pressure range
30 to 150 Pa



Model: ARXH30KMTAP / ARXH36KMTAP / ARXH45KMTAP / ARXH54KMTAP
ARXH36KMTAP [3-phase] / ARXH45KMTAP [3-phase] / ARXH54KMTAP [3-phase]



For ARXH30/36KMTAP For ARXH45/54KMTAP

Specifications

Model name	Indoor unit			ARXH30KMTAP	ARXH36KMTAP	ARXH45KMTAP	ARXH36KMTAP	ARXH45KMTAP	ARXH54KMTAP
	Outdoor unit			AOEG30KBTB	AOEG36KBTB	AOEG45KBTB	AOEG36KRTA	AOEG45KRTA	AOEG54KRTA
Power Source				Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz		
Capacity	Cooling	Rated	kW	8.5	9.5	12.1	9.5	12.1	13.4
		Min.-Max.		2.8-10.0	2.8-11.2	4.0-13.5	2.8-11.2	4.0-13.5	4.5-14.5
	Heating	Rated		10.0	10.8	13.5	10.8	13.5	15.5
		Min.-Max.		2.7-11.2	2.7-12.7	4.2-16.2	2.7-12.7	4.2-16.2	4.7-16.5
Input Power	Cooling/Heating		kW	2.57 / 2.50	2.97 / 2.70	3.87 / 3.73	2.97 / 2.70	3.87 / 3.73	4.62 / 4.65
EER	Cooling		W/W	3.31	3.20	3.13	3.20	3.13	2.90
COP	Heating			4.00	4.00	3.62	4.00	3.62	3.33
Pdesign	Cooling/Heating (-10°C)		kW	8.5 / 8.0	9.5 / 8.7	12.1 / 9.2	9.5 / 8.7	12.1 / 9.2	13.4 / 9.5
SEER	Cooling		W/W	6.23	6.10	5.60	6.10	5.60	5.41
SCOP	Heating (Average)			4.00	4.10	4.10	4.10	4.10	4.10
Energy Efficiency Class	Cooling			A++	A++	-	A++	-	-
	Heating (Average)			A+	A+	-	A+	-	-
η _c			%	-	-	221.0	-	221.0	213.4
η _h				-	-	161.0	-	161.0	161.0
Max. Operating Current	Cooling/Heating		A	22.6 / 22.6	22.6 / 22.6	28.5 / 28.5	10.5 / 10.5	14.0 / 14.0	14.0 / 14.0
Annual Energy Consumption	Cooling		kWh/a	485	553	-	553	-	-
	Heating			2,795	2,970	-	2,970	-	-
Moisture Removal			l/h	1.8	2.0	4.0	2.0	4.0	5.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38 / 34 / 31 / 28	38 / 34 / 31 / 28	40 / 36 / 32 / 29	38 / 34 / 31 / 28	40 / 36 / 32 / 29	40 / 36 / 32 / 29
	Indoor (Heating)	H/M/L/Q		38 / 34 / 31 / 28	38 / 34 / 31 / 28	40 / 36 / 32 / 29	38 / 34 / 31 / 28	40 / 36 / 32 / 29	40 / 36 / 32 / 29
Sound Power Level	Outdoor (Cooling/Heating)	High		53 / 55	55 / 55	57 / 57	55 / 55	57 / 57	57 / 59
	Indoor (Cooling/Heating)	High		64 / 64	65 / 65	67 / 67	65 / 65	67 / 67	67 / 67
Airflow Rate	Outdoor (Cooling/Heating)	High	68 / 69	70 / 70	71 / 71	70 / 70	71 / 71	73 / 73	
	Indoor/Outdoor (Cooling)	High	m³/h	1,950 / 3,750	2,070 / 3,750	2,160 / 4,450	2,070 / 3,750	2,160 / 4,450	2,160 / 4,450
Static pressure range (Standard)	Indoor/Outdoor (Heating)	High		1,950 / 3,750	2,070 / 3,750	2,160 / 4,450	2,070 / 3,750	2,160 / 4,450	2,160 / 4,450
				Pa	30 to 150 (50)	30 to 150 (50)	30 to 150 (60)	30 to 150 (50)	30 to 150 (60)
Net Dimensions	Indoor		mm	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700
H x W x D	Outdoor		mm	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320
	Indoor		kg	42	42	42	42	42	42
Weight	Outdoor		kg	52	52	67	53	67	67
Connection Pipe Diameter (Liquid/Gas)			mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)				25 / 32	25 / 32	25 / 32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)			m	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference				30	30	30	30	30	30
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge		kg (CO2eq-T)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

Compact wired remote controller:

Wired remote controller (touch panel):

Wired remote controller:

Simple remote controller (without operation mode):

Simple remote controller:

Remote sensor unit:

UTY-RVRY

UTY-RCRYZ1

UTY-RNRYZ5

UTY-RLRY

UTY-RHRY

UTY-RSRY

UTY-XSZX

UTY-XSZXZ1

IR receiver unit:

Silver ion filter:

Long-life filter:

MODBUS converter:

KNX converter:

WLAN adapter:

External switch controller: UTY-TERX

UTY-LBTYM

UTD-HFNA

UTD-LFDA

UTY-VMSX

UTY-VKX

UTY-TFSXZ1

UTY-TFSXJ3

External input and output PCB:

External input and output PCB bracket:

Network Converter for single split (DC power supply type):

Network Converter for single split (AC power supply type):

External Connect Kit:

(Outdoor unit)

External Connect Kit:

UTY-XCSX

UTZ-GXDA

UTY-VTGX


UTY-VTGXV

UTY-XWZXZG

UTY-XWZXZ3

Dimensions

(Unit: mm)

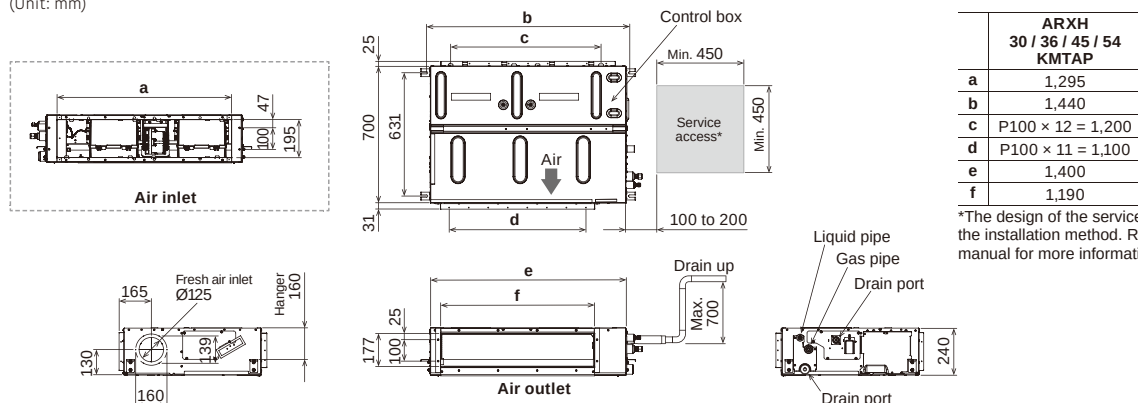

SPLIT

Medium Static Pressure Duct


Compact Size



(30)


High-efficiency & Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high-efficiency DC fan motor enable high-efficiency and quiet operation.

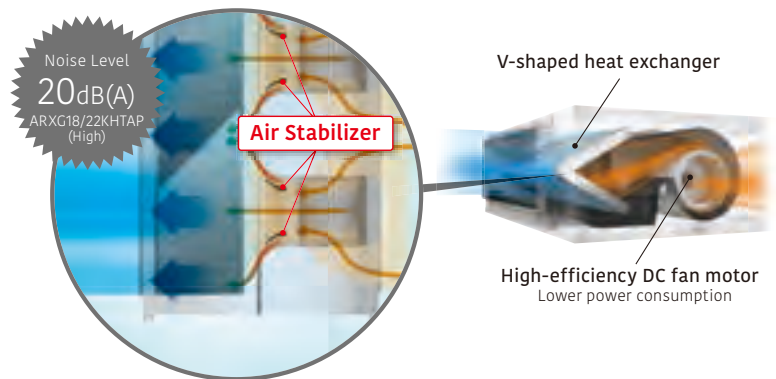

Small, lightweight outdoor unit

The outdoor unit in this series is smaller and lighter than previous-generation outdoor units. It can be installed in a narrow space.

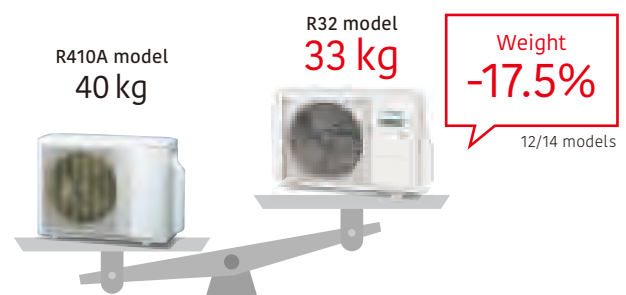

Automatic airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.

Automatically adjust !



Static pressure
??? Pa
It was necessary to calculate

Link up with a variety of central control system (option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.





Model: ARXG12KHTAP / ARXG14KHTAP / ARXG18KHTAP / ARXG22KHTAP / ARXG24KHTAP / ARXG30KHTAP



ARXG12/14KHTAP



ARXG18/22/24/30KHTAP



For ARXG12/14KHTAP



For ARXG18/22KHTAP



For ARXG24KHTAP



For ARXG30KHTAP

Specifications

Model name	Indoor unit			ARXG12KHTAP	ARXG14KHTAP	ARXG18KHTAP	ARXG22KHTAP	ARXG24KHTAP	ARXG30KHTAP
	Outdoor unit			AOEG12KBTB	AOEG14KBTB	AOEG18KBTB	AOEG22KBTB	AOEG24KBTB	AOEG30KBTB
Power Source				Single phase, ~230 V, 50 Hz					
Capacity	Cooling	Rated	kW	3.5	4.3	5.2	6.0	6.8	8.5
		Min.-Max.		0.9-4.4	0.9-5.4	0.9-5.9	0.9-6.7	0.9-8.0	2.8-10.0
	Heating	Rated		4.1	5.0	6.0	7.0	7.5	10.0
		Min.-Max.		0.9-5.7	0.9-6.5	0.9-7.5	0.9-8.0	0.9-9.1	2.7-11.2
Input Power	Cooling/Heating		kW	0.87/1.00	1.17/1.25	1.36/1.56	1.71/1.81	1.89/1.85	2.65/2.63
EER	Cooling		W/W	4.02	3.68	3.82	3.51	3.60	3.21
COP	Heating			4.10	4.00	3.85	3.87	4.06	3.80
Pdesign	Cooling/Heating (-10°C)		kW	3.5/3.4	4.3/3.8	5.2/4.4	6.0/4.8	6.8/6.0	8.5/8.0
SEER	Cooling		W/W	6.30	6.20	6.50	6.50	6.50	6.23
SCOP	Heating (Average)			4.10	4.00	4.10	4.20	4.10	4.00
Energy Efficiency Class	Cooling			A++	A++	A++	A++	A++	A++
	Heating (Average)			A+	A+	A+	A+	A+	A+
Max. Operating Current	Cooling/Heating		A	9.7/9.7	10.2/10.2	12.1/12.1	12.6/12.6	13.6/13.6	22.6/22.6
Annual Energy Consumption	Cooling		kWh/a	194	243	280	323	366	477
	Heating			1,159	1,328	1,501	1,597	2,048	2,796
Moisture Removal			l/h	0.7	0.9	1.2	1.5	1.8	2.3
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	32/27/26/24	33/28/27/25	28/25/22/20	28/25/22/20	32/28/24/21	36/33/30/29
	Indoor (Heating)	H/M/L/Q		32/27/26/24	33/28/27/25	28/25/22/20	28/25/22/20	32/28/24/21	36/33/30/29
	Outdoor (Cooling/Heating)	High		47/47	49/49	50/50	51/51	53/54	53/55
Sound Power Level	Indoor (Cooling/Heating)	High	dB(A)	57/58	59/60	54/54	57/57	57/57	63/65
	Outdoor (Cooling/Heating)	High		61/61	62/62	62/62	63/63	65/66	68/69
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	850/1,580	950/1,670	1,050/2,160	1,050/2,240	1,360/2,700	1,700/3,750
	Indoor/Outdoor (Heating)	High		850/1,520	950/1,580	1,050/1,830	1,050/1,960	1,360/2,700	1,700/3,750
Static pressure range (Standard)			Pa	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (35)	30 to 200 (47)
Net Dimensions	Indoor		mm	300 × 700 × 700	300 × 700 × 700	300 × 1,000 × 700	300 × 1,000 × 700	300 × 1,000 × 700	300 × 1,000 × 700
H × W × D	Outdoor		mm	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320
Weight	Indoor		kg	27	27	35	35	36	36
	Outdoor		kg	33	33	36	38	42	52
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	6.35/12.70	9.52/15.88
Drain Hose Diameter (I.D./O.D.)				25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)			m	25 (15)	25 (15)	30 (20)	30 (20)	30 (20)	50 (30)
Max. Height Difference				20	20	20	25	25	30
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	ka (CO2eq-T)	0.85 (0.574)	0.85 (0.574)	1.02 (0.689)	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Long-life filter: UTD-LFNB (18-30)

External input and output PCB:

UTY-XCSX

Compact wired remote controller:

UTY-RCRYZ1

UTD-LFNC (12-14)

External Connect Kit:

UTY-XWZXZG

Wired remote controller (touch panel):

UTY-RNRYZ5

Silver Ion Filter: UTD-HFNB (18-30)

External input and output PCB bracket:

UTZ-GXNA

Wired remote controller:

UTY-RLRY

UTD-HFNC (12/14)

Network Converter for single split (DC power supply type): UTY-VTGX

UTY-RNNYM

WLAN adapter: UTY-TFSXZ1

Network Converter for single split (AC power supply type): UTY-VTGXV

UTY-RVNYM

FG-RC-WIFI22

External switch controller:

UTY-TERX

UTY-RHRY

UTY-TFSXJ3

(Outdoor unit 30)

Simple remote controller (without operation mode):

UTY-RSRY

FG-AC-WIFI21

External Connect Kit:

UTY-XWZXZ3




Remote sensor unit:

UTY-XSZXZ1

IR receiver unit: UTY-LBTYM


Dimensions

(Unit: mm)

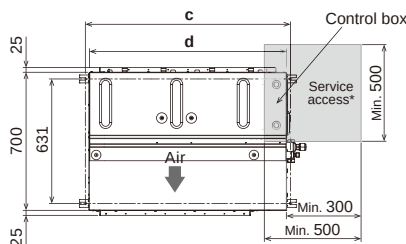

	ARXG 12 / 14 KHTAP	ARXG 18 / 22 / 24 / 30 KHTAP
a	650	895
b	P100×5=500	P100×8=800
c	740	1,040
d	700	1,000
e	462	762
f	P100×4=400	P100×7=700

*The design of the service access depends on the installation method. Refer to the installation manual for more information.



SPLIT

Medium Static Pressure Duct


Compact Size



(36/45/54)


High-efficiency & Quiet operation

The combination of the V-shaped heat exchanger, air stabilizer, and the high-efficiency DC fan motor enable high-efficiency and quiet operation.

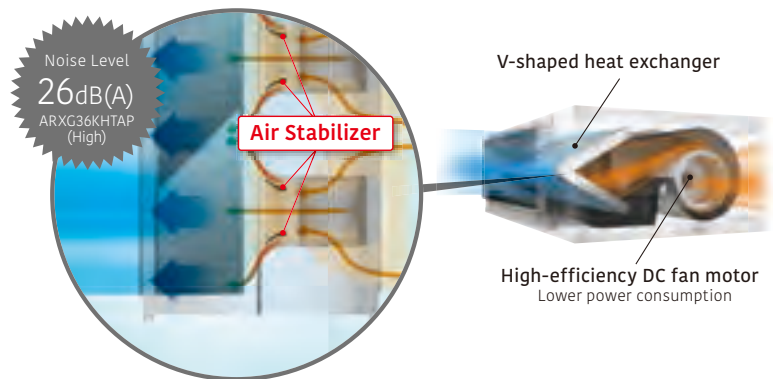

Small, lightweight outdoor unit

The outdoor unit in this series is smaller and lighter than previous-generation outdoor units. It can be installed in a narrow space.

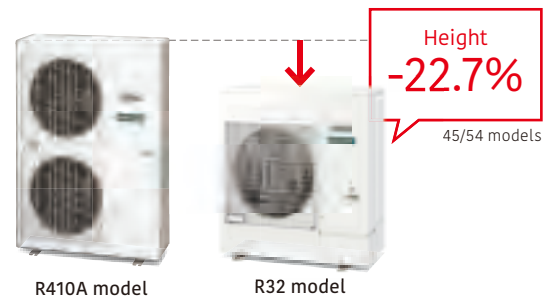

Automatic airflow adjustment function

This unique and innovative function detects required air flow in each application case and automatically adjust the volume.

Automatically adjust !



Static pressure
??? Pa
It was necessary to calculate

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.





Model: ARXG36KHTAP / ARXG45KHTAP / ARXG54KHTAP
ARXG36KHTAP [3-phase] / ARXG45KHTAP [3-phase] / ARXG54KHTAP [3-phase]



For ARXG36KHTAP



For ARXG45/54KHTAP

Specifications

Model name	Indoor unit			ARXG36KHTAP	ARXG45KHTAP	ARXG54KHTAP	ARXG36KHTAP	ARXG45KHTAP	ARXG54KHTAP	
	Outdoor unit			AOEG36KBTB	AOEG45KBTB	AOEG54KBTB	AOEG36KRTA	AOEG45KRTA	AOEG54KRTA	
Power Source				Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz			
Capacity	Cooling	Rated	kW	9.5	12.1	13.4	9.5	12.1	13.4	
		Min.-Max.		2.8-11.2	4.0-14.0	4.5-14.5	2.8-11.2	4.0-14.0	4.5-14.5	
	Heating	Rated		10.8	13.5	15.5	10.8	13.5	15.5	
		Min.-Max.		2.7-12.7	4.2-16.2	4.7-16.5	2.7-12.7	4.2-16.2	4.7-16.5	
Input Power	Cooling/Heating		kW	2.86/2.48	3.53/3.37	4.42/3.89	2.86/2.48	3.53/3.37	4.42/3.89	
EER	Cooling		W/W	3.32	3.43	3.03	3.32	3.43	3.03	
COP	Heating			4.35	4.01	3.98	4.35	4.01	3.98	
Pdesign	Cooling/Heating (-10°C)		kW	9.5 / 8.7	12.1 / 9.2	13.4 / 9.5	9.5 / 8.7	12.1 / 9.2	13.4 / 9.5	
SEER	Cooling		W/W	6.10	5.83	5.81	6.10	5.83	5.81	
SCOP	Heating (Average)			4.20	3.87	3.85	4.20	3.87	3.85	
Energy Efficiency Class	Cooling			A++	-	-	A++	-	-	
	Heating (Average)			A+	-	-	A+	-	-	
nc				%	-	230.2	229.4	-	230.2	229.4
nh					-	151.8	151.0	-	151.8	151.0
Max. Operating Current	Cooling/Heating			A	22.6/22.6	28.5/28.5	28.5/28.5	10.5/10.5	14.0/14.0	14.0/14.0
Annual Energy Consumption	Cooling			kWh/a	544	-	-	544	-	-
	Heating				2,898	-	-	2,898	-	-
Moisture Removal				l/h	2.0	2.6	3.7	2.0	2.6	3.7
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	36/31/28/26	39/35/31/29	39/35/31/29	36/31/28/26	39/35/31/29	39/35/31/29	
	Indoor (Heating)	H/M/L/Q		33/31/28/26	39/35/31/29	39/35/31/29	33/31/28/26	39/35/31/29	39/35/31/29	
Sound Power Level	Outdoor (Cooling/Heating)	High		55/55	57/57	57/59	55/55	57/57	57/59	
	Indoor (Cooling/Heating)	High		64/63	67/69	67/69	64/63	67/69	67/69	
Airflow Rate	Outdoor (Cooling/Heating)	High	m³/h	70/70	71/71	73/73	70/70	71/71	73/73	
	Indoor/Outdoor (Cooling)	High		2,050/3,750	2,550/4,450	2,550/4,450	2,050/3,750	2,550/4,450	2,550/4,450	
Static pressure range (Standard)				Pa	1,850/3,750	2,550/4,450	2,550/4,450	1,850/3,750	2,550/4,450	2,550/4,450
					30-200 (47)	30-200 (60)	30-200 (60)	30-200 (47)	30-200 (60)	30-200 (60)
Net Dimensions H x W x D	Indoor			mm	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700	300 × 1,400 × 700
	Outdoor			mm	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320
Weight	Indoor			kg	46	46	46	46	46	46
	Outdoor			kg	52	67	67	53	67	67
Connection Pipe Diameter (Liquid/Gas)				mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)					25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)				m	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference					30	30	30	30	30	30
Operating Range	Cooling			°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating				-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge				kg (CO2eq-T)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Long-life filter:

UTD-LFNA

External input and output PCB:

UTY-XCSX

Compact wired remote controller:

UTY-RCRYZ1

Silver Ion Filter:

UTD-HFNA

External input and output PCB bracket:

UTZ-GXNA

Wired remote controller (touch panel):

UTY-RNRYZ5

WLAN adapter:

UTY-TFSXZ1

Network Converter for single split (DC power supply type): UTU-VTGX

Wired remote controller:

UTY-RLRY

FG-RC-WIF1Z2

UTY-TFSXJ3

Network Converter for single split (AC power supply type): UTU-VTGXV

UTY-RNNYM

FG-AC-WIF1Z1

Simple remote controller (without operation mode): UTY-RHRY

External switch controller: UTY-TERX

(Outdoor unit 36/45/54)

External connect kit: UTY-XWZXZ3

Simple remote controller:

UTY-RSRY

IR receiver unit:

UTY-LBTYM

Remote sensor unit:



UTY-XSZXZ1

External Connect Kit:

UTY-XWZXZG




Dimensions

(Unit: mm)

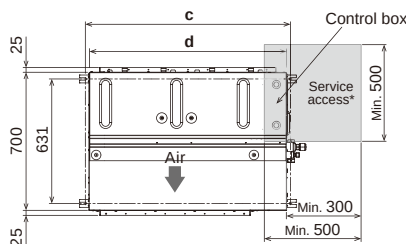

ARXG 36 / 45 / 54 KHTAP	
a	1,295
b	P100×12=1,200
c	1,440
d	1,400
e	1,162
f	P100×11=1,100

*The design of the service access depends on the installation method. Refer to the installation manual for more information.

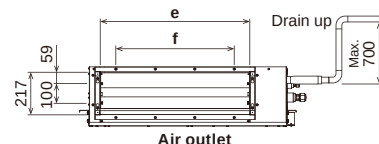

SPLIT


Medium Static Pressure Duct Standard



(30/36/45)

Easy maintenance

Structural improvement is attained by making the bottom panel in two pieces—front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. As a result, the motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing while leaving the main chassis in place.

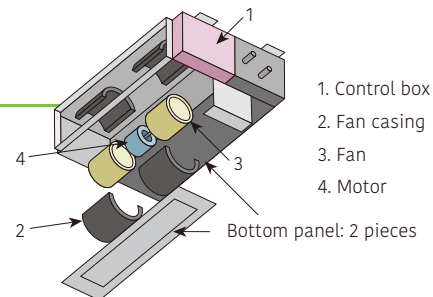


See below for case of rear-suction type

Slim & Compact design


Indoor Unit

The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

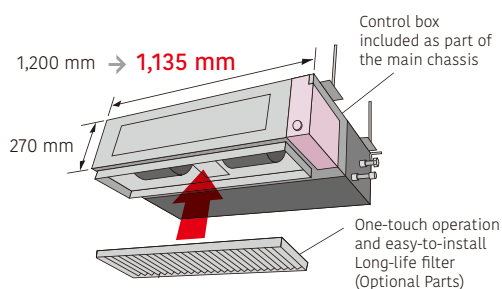


Outdoor Unit

The outdoor units for the 45,000 BTU and 54,000 BTU models have been completely redesigned. Easier installation is achieved for this compact and lightweight outdoor unit.

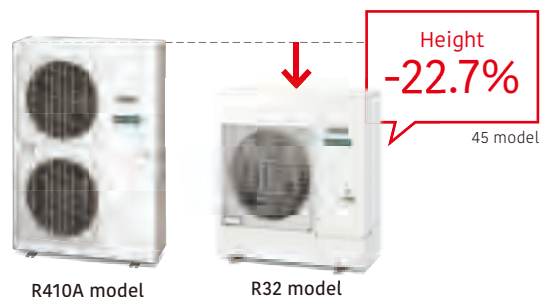

Two-direction drain piping



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.





**Model: ARXG22KMLB / ARXG24KMLA / ARXG30KMLA / ARXG36KMLA / ARXG45KMLA
ARXG36KMLA [3-phase] / ARXG45KMLA [3-phase]**



For ARXG22KMLB For ARXG24KMLA For ARXG30/36KMLA For ARXG45KMLA

Specifications

Model name	Indoor unit			ARXG22KMLB	ARXG24KMLA	ARXG30KMLA	ARXG36KMLA	ARXG45KMLA	ARXG36KMLA	ARXG45KMLA		
	Outdoor unit			AOEG22KBTB	AOEG24KBTB	AOEG30KBTB	AOEG36KBTB	AOEG45KBTB	AOEG36KRTA	AOEG45KRTA		
Power Source				Single phase, ~230 V, 50 Hz					3-phase, ~400 V, 50 Hz			
Capacity	Cooling	Rated	kW	6.0	6.8	8.5	9.5	12.1	9.5	12.1		
		Min.-Max.		0.9-6.7	0.9-8.0	2.8-10.0	2.8-11.2	4.0-13.0	2.8-11.2	4.0-13.0		
	Heating	Rated		7.0	7.5	10.0	10.8	13.5	10.8	13.5		
		Min.-Max.		0.9-8.0	0.9-9.1	2.7-11.2	2.7-12.7	4.2-15.2	2.7-12.7	4.2-15.2		
Input Power	Cooling/Heating		kW	1.78/1.87	2.14/1.97	2.65/2.63	2.97/2.88	4.22/3.84	2.97/2.88	4.22/3.84		
EER	Cooling		W/W	3.37	3.18	3.21	3.20	2.87	3.20	2.87		
COP	Heating			3.74	3.80	3.80	3.75	3.52	3.75	3.52		
Pdesign	Cooling/Heating (-10°C)		kW	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	12.1/9.2	9.5/8.7	12.1/9.2		
SEER	Cooling		W/W	6.10	6.20	6.23	6.10	5.25	6.10	5.25		
SCOP	Heating			4.10	4.10	4.00	4.00	3.63	4.00	3.63		
Energy Efficiency Class	Cooling			A++	A++	A++	A++	-	A++	-		
	Heating			A+	A+	A+	A+	-	A+	-		
η _c				%	-	-	-	207.0	-	207.0		
η _h				%	-	-	-	142.2	-	142.2		
Max. Operating Current	Cooling/Heating			A	12.6/12.6	13.6/13.6	22.6/22.6	22.6/22.6	28.5/28.5	10.5/10.5	14.0/14.0	
Annual Energy Consumption	Cooling			kWh/a	344	384	477	545	-	545	-	
	Heating				1,637	2,045	2,797	3,044	-	3,044	-	
Moisture Removal				l/h	2.1	2.5	2.5	3.0	4.0	3.0	4.0	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	31/29/27/25	31/29/27/25	39/35/30/26	39/35/30/26	42/38/32/28	39/35/30/26	42/38/32/28		
	Indoor (Heating)	H/M/L/Q		31/29/27/25	31/29/27/25	42/35/30/26	42/35/30/26	42/38/32/28	42/35/30/26	42/38/32/28		
Outdoor (Cooling/Heating)	High	51/51		53/54	53/55	55/55	57/57	55/55	57/57			
Sound Power Level	Indoor (Cooling/Heating)	High		60/62	60/62	65/69	65/70	68/70	65/70	68/70		
	Outdoor (Cooling/Heating)	High		63/63	65/66	68/69	70/70	71/71	70/70	71/71		
Airflow Rate	Indoor/Outdoor (Cooling)	High		1,100/2,240	1,100/2,700	1,900/3,750	1,900/3,750	2,100/4,450	1,900/3,750	2,100/4,450		
	Indoor/Outdoor (Heating)	High		1,100/1,960	1,100/2,700	2,100/3,750	2,100/3,750	2,100/4,450	2,100/3,750	2,100/4,450		
Static pressure range (Standard)				Pa	30 to 150 (35)	30 to 150 (35)	30 to 150 (47)	30 to 150 (47)	30 to 150 (60)	30-150 (47)	30-150 (60)	
Net Dimensions				mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	
H × W × D	Outdoor			mm	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	
	Indoor			kg	35	35	38	38	39	38	39	
	Outdoor			kg	38	42	52	52	67	53	67	
Connection Pipe Diameter (Liquid/Gas)				mm	6.35/12.70	6.35/12.70	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	
Drain Hose Diameter (I.D./O.D.)				mm	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	35.7/38.1	
Max. Pipe Length (Pre-Charge)				m	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	
Max. Height Difference					25	25	30	30	30	30	30	
Operating Range	Cooling			°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	
	Heating				-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)				R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	
	Charge			kg (CO2eq-T)	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)	

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

UTY-RNNYM

UTY-RVNYM

Simple remote controller (without operation mode):

UTY-RHRY

Simple remote controller:

UTY-RSRY

External switch controller:

UTY-TERX

WLAN adapter:

UTY-TFSXZ1

FG-RC-WIF122

UTY-TFSXJ3

FG-AC-WIF121

Flange (Round):

UTD-RF204

Flange (Square):

UTD-SF045T

IR receiver unit:

UTY-LBTMY

Remote sensor unit:

UTY-XSXZ1

Drain pump unit:

UTZ-PX1NBA

Network Converter for single split (DC power supply type):

UTY-VTGX

Network Converter for single split (AC power supply type):

UTY-VTGXV

Long-life filter:

UTD-LF25NA

Silver Ion Filter:

UTD-HFND

External Connect Kit:

UTY-XWZXZG


(Outdoor unit 30/36/45)

External Connect Kit:

UTY-XWZXZ3

Dimensions

(Unit: mm)

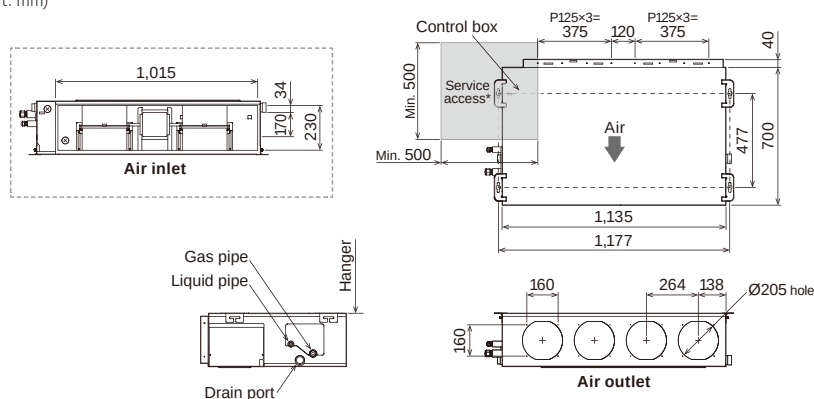

*The design of the service access depends on the installation method. Refer to the installation manual for more information.


SPLIT

High Static Pressure Duct




Easy installation (Compact & Lightweight)

The indoor and outdoor units are designed to be compact and light by reducing the basic chassis size and the overall material weight.


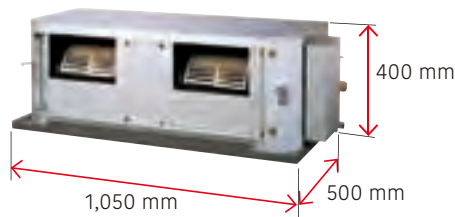


R410A model




R32 model

Design also suits high static pressure

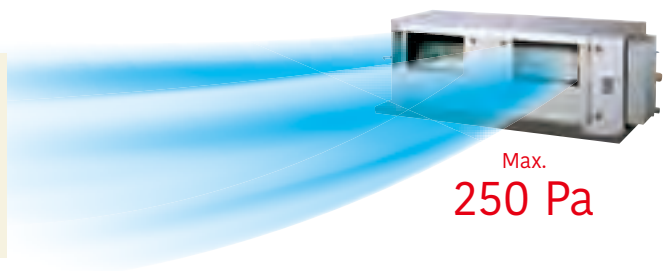

Low noise

Slanted corners at the top help reduce turbulent airflow. Low noise is realized by adopting a plastic case and a plastic fan.

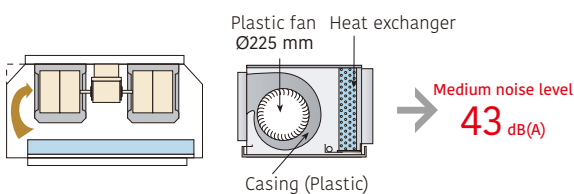

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.





Model: ARXG45KHTB / ARXG54KHTB
ARXG45KHTB [3-phase] / ARXG54KHTB [3-phase]



Specifications

Model name	Indoor unit			ARXG45KHTB	ARXG54KHTB	ARXG45KHTB	ARXG54KHTB
	Outdoor unit			AOEG45KBTB	AOEG54KBTB	AOEG45KRTA	AOEG54KRTA
Power Source				Single phase, ~230 V, 50 Hz		3-phase, ~400 V, 50 Hz	
Capacity	Cooling	Rated	kW	12.1	13.4	12.1	13.4
		Min.-Max.		4.0-14.0	5.0-14.5	4.0-14.0	5.0-14.5
	Heating	Rated		13.5	15.5	13.5	15.5
		Min.-Max.		5.0-16.2	5.5-18.0	5.0-16.2	5.5-18.0
Input Power	Cooling/Heating		kW	4.16/3.61	4.77/4.18	4.16/3.61	4.77/4.18
EER	Cooling		W/W	2.91	2.81	2.91	2.81
COP	Heating			3.74	3.71	3.74	3.71
Pdesign	Cooling/Heating (-10°C)		kW	12.1 / 9.2	13.4 / 9.5	12.1 / 9.2	13.4 / 9.5
SEER	Cooling		W/W	5.14	5.10	5.14	5.10
SCOP	Heating			4.00	3.96	4.00	3.96
Energy Efficiency Class	Cooling			-	-	-	-
	Heating			-	-	-	-
η _c			%	202.6	201.0	202.6	201.0
η _h				157.0	155.4	157.0	155.4
Max. Operating Current	Cooling/Heating		A	28.5/28.5	28.5/28.5	14.0/14.0	14.0/14.0
Annual Energy Consumption	Cooling		kWh/a	-	-	-	-
	Heating			-	-	-	-
Moisture Removal			l/h	1.5	2.0	1.5	2.0
Sound Pressure Level	Indoor (Cooling)	H/M/L	dB(A)	47/43/40	47/43/40	47/43/40	47/43/40
	Indoor (Heating)	H/M/L		47/43/40	47/43/40	47/43/40	47/43/40
	Outdoor (Cooling/Heating)	High		57/57	57/59	57/57	57/59
Sound Power Level	Indoor (Cooling/Heating)	High		75/74	75/74	75/74	75/74
	Outdoor (Cooling/Heating)	High		71/71	73/73	71/71	73/73
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	3,350/4,450	3,350/4,450	3,350/4,450	3,350/4,450
	Indoor/Outdoor (Heating)	High		3,350/4,450	3,350/4,450	3,350/4,450	3,350/4,450
Static pressure range (Standard)			Pa	100 to 250 (100)	100 to 250 (100)	100to250 (100)	100to250 (100)
Net Dimensions	Indoor		mm	400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500
H x W x D	Outdoor		mm	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320	998 × 940 × 320
	Indoor		kg	46	46	46	46
Weight	Outdoor		kg	67	67	67	67
	Connection Pipe Diameter (Liquid/Gas)			mm	9.52/15.88	9.52/15.88	9.52/15.88
Drain port Diameter (I.D./O.D.)				23.4/25.4	23.4/25.4	23.4/25.4	23.4/25.4
Max. Pipe Length (Pre-Charge)			m	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference				30	30	30	30
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge			kg (CO ₂ eq-T)	2.70 (1.823)	2.70 (1.823)	2.70 (1.823)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type): UTY-RVRY
 Compact wired remote controller: UTY-RCRYZ1
 Wired remote controller (touch panel): UTY-RNRYZ5
 Wired remote controller: UTY-RLRY
 Simple remote controller: UTY-RSRY
 UTY-RHRY
 UTY-LBTYM

IR Receiver unit:

Remote sensor unit: UTY-XSZXZ1
 Long-life filter: UTD-LF60KA
 External switch controller: UTY-TERX
 WLAN adapter: UTY-TFSXZ1
 UTY-TFSXJ3
 FG-AC-WIF1Z1
 External input and output PCB: UTY-XCSX+UTZ-GXEA


Network Converter for single split (DC power supply type): UTY-VTGX
 Network Converter for single split (AC power supply type): UTY-VTGXV
 Silver Ion Filter: UTD-HFKB
 External Connect Kit: UTY-XWZXZG

(Outdoor unit)

External Connect Kit: UTY-XWZXZ3

Dimensions

(Unit: mm)

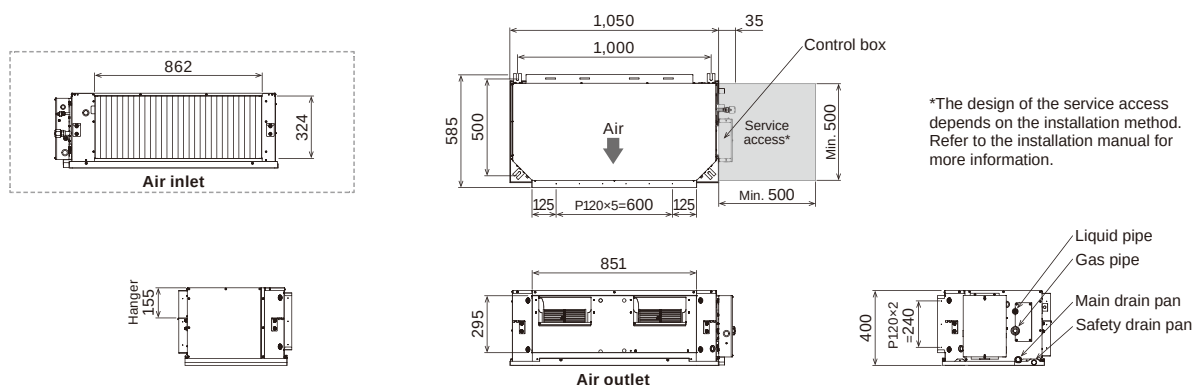

SPLIT

High Static Pressure Duct





ALL
DC



High energy efficiency


Much greater efficiency is achieved by the use of all-DC inverter technology.

Design also corresponding to high static pressure

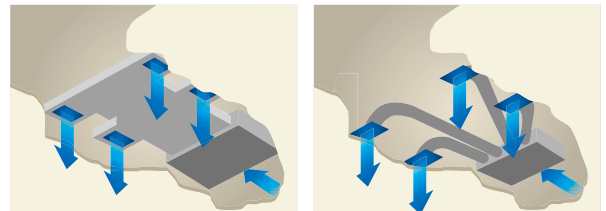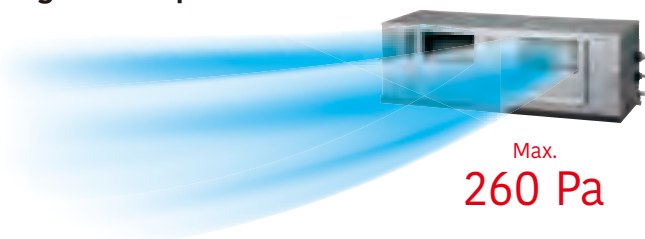


Easy installation (Compact & Lightweight)

The indoor unit is designed to be compact and light by reducing the basic chassis size and the overall material weight.

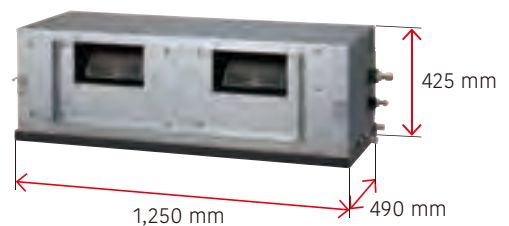

Low noise

Slanted corners at the top help reduce turbulent airflow. Low noise is realized by adopting a plastic case and a plastic fan.

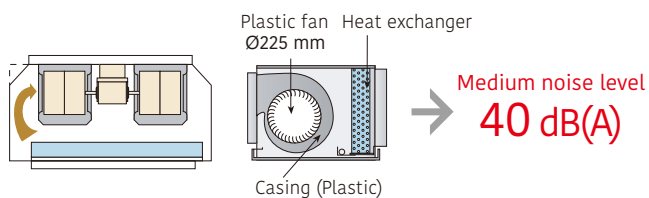

Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.





Model: ARHG60LHTA [3-phase]



Wired RC



Specifications

Model name		Indoor unit		ARYG60LHTA	
		Outdoor unit		AOYG60LATT	
Power Source				3-phase, ~400 V, 50 Hz	
Capacity	Cooling	Rated	kW	15.0	
		Min.-Max.		6.2-17.5	
	Heating	Rated		18.0	
		Min.-Max.		6.2-20.0	
Input Power	Cooling/Heating		kW	4.70/5.15	
EER	Cooling		W/W	3.19	
COP	Heating			3.50	
Pdesign	Cooling/Heating		kW	15.0 / 10.8	
SEER	Cooling		W/W	4.86	
SCOP	Heating			3.50	
ηc				191.4	
ηh				137.0	
Max. Operating Current	Cooling/Heating		A	12.5 /12.5	
Moisture Removal		l/h		2.0	
Sound Pressure	Indoor (Cooling)	H/M/L/Q	dB(A)	45/40/36/-	
	Indoor (Heating)	H/M/L/Q		45/40/36/-	
	Outdoor (Cooling/Heating)	High		56/58	
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	3,550/6,900	
	Indoor/Outdoor (Heating)	High		3,550/7,300	
Static pressure range (Standard)			Pa	60 to 260 (60)	
Net Dimensions	Indoor		mm	425 × 1,250 × 490	
H x W x D	Outdoor		mm	1,290 × 900 × 330	
Weight	Indoor		kg	54	
	Outdoor		kg	104	
Connection Pipe Diameter (Liquid/Gas)			mm	9.52/15.88	
Drain Hose Diameter (I.D./O.D.)				23.4/25.4	
Max. Pipe Length (Pre-Charge)			m	75 (30)	
Max. Height Difference				30	
Operating Range	Cooling		°CDB	-15 to 46	
	Heating			-15 to 24	
Refrigerant	Type (Global Warming Potential)		R410A (2.088)		
	Charge	kq (CO2eq-T)	3.45 (7.204)		

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired remote controller: UTY-RNNYM

Wired remote controller: UTY-RVNYM

External switch controller: UTY-TERX

WLAN adapter: UTY-TFNXZ1

FG-RC-WIF122

Remote sensor unit: UTY-XSZXZ1

IR receiver unit: UTY-LRHYM

Network Converter for single split (DC power supply type): UTY-VTGX

Network Converter for single split (AC power supply type): UTY-VTGXV



External Connect Kit: UTD-ECS5A

(Outdoor unit)




External Connect Kit: UTY-XWZXZ2

Dimensions

(Unit: mm)

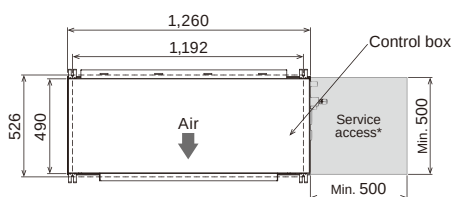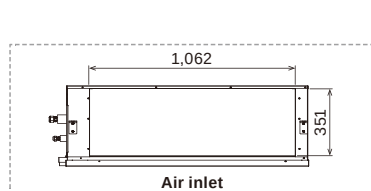

*The design of the service access depends on the installation method. Refer to the installation manual for more information.





SPLIT

Big Duct




Splittable, lightweight, and compact design

The indoor unit can be split into a fan unit and a heat exchanger unit to make installation easier.

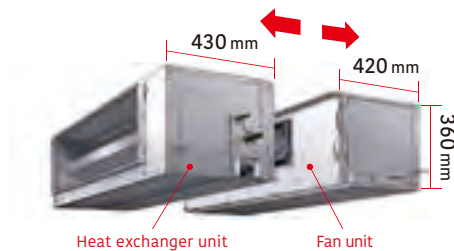

Quiet operation

The combination of a V-shaped heat exchanger, an air stabilizer, and a high-efficiency DC fan motor enables this compact unit to operate quietly.

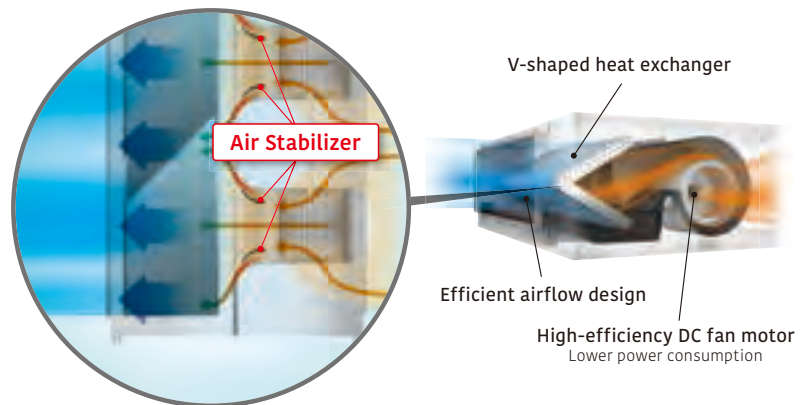

Automatic airflow adjustment function

The optimum airflow can be set automatically to facilitate faster installation.

Automatically adjust !



Static pressure
??? Pa
It was necessary to calculate

Link up with a variety of central control system (option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.










Model name	Indoor unit		ARYG72LHTA		ARYG90LHTA			
	Outdoor unit		AOYG72LRLLA		AOYG90LRLLA			
Power Source	Indoor		Single phase, ~230 V, 50 Hz					
	Outdoor		3-phase, ~400 V, 50 Hz					
Capacity	Cooling	Rated	kW	19.0	22.0			
		Min.-Max.		8.4-20.9	10.3-24.2			
	Heating	Rated		22.4	27.0			
		Min.-Max.		7.2-24.6	8.5-29.7			
Input Power	Cooling/Heating		kW	6.46/6.59	7.77/8.18			
EER	Cooling		W/W	2.94	2.83			
COP	Heating			3.40	3.30			
Pdesign	Cooling/Heating		kW	19.0 / 15.3	22.0 / 18.5			
SEER	Cooling		W/W	5.22	5.14			
SCOP	Heating			3.94	3.92			
ηc			%	205.8	202.6			
ηh				154.6	153.8			
Max. Operating Current	Indoor (Cooling/Heating)		A	4.6 / 4.6	6.0 / 6.0			
	Outdoor (Cooling/Heating)			15.8 / 15.8	20.6 / 20.6			
Moisture Removal			l/h	4.5	6.0			
Sound Pressure	Indoor (Cooling)	H/M/L/Q	dB(A)	46/43/41/39	47/44/42/40			
	Indoor (Heating)	H/M/L/Q		46/43/41/39	47/44/42/40			
	Outdoor (Cooling/Heating)	High		55/55	55/57			
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	4,300/8,400	4,300/8,400			
	Indoor/Outdoor (Heating)	High		4,300/8,400	4,300/9,000			
Static pressure range (Standard)			Pa	50 to 150 (72)	50 to 200 (72)			
Net Dimensions	Indoor		mm	360 × 1,400 × 850	360 × 1,400 × 850			
H × W × D	Outdoor		mm	1,428 × 1,080 × 480	1,428 × 1,080 × 480			
Weight	Indoor		kg	69	80			
	Outdoor		kg	165	174			
Connection Pipe Diameter (Liquid/Gas)			mm	12.7/25.4	12.7/25.4			
Drain Hose Diameter (I.D./O.D.)				25/32	25/32			
Max. Pipe Length (Pre-Charge)			m	100 (30)	100 (30)			
Max. Height Difference				30	30			
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46			
	Heating			-20 to 24	-20 to 24			
Refrigerant	Type (Global Warming Potential)			R410A (2,088)	R410A (2,088)			
	Charge	kg (CO2eq-T)		5.6 (11.693)	7.1 (14.825)			

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the “Control system & Optional parts” chapter.

UTY-XWZXZ3

(Unit: mm)

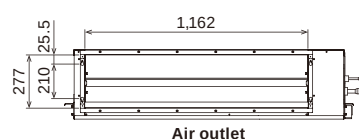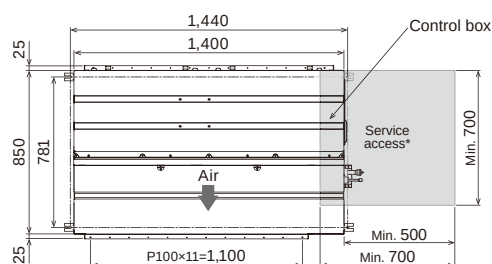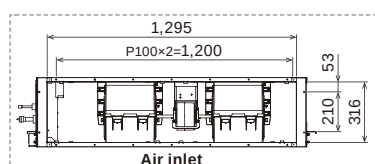

*The design of the service access depends on the installation method. Refer to the installation manual for more information.

SPLIT


Floor

Compact Size



High energy saving

The Floor 09 class achieves a top-class SEER of 8.50 and an A+++ seasonal efficiency rank for cooling. The Floor 09 class achieves an improved SCOP of 4.30 and an A+ seasonal efficiency rank for heating.




SEER 8.50^{*1} SCOP 4.30^{*1}

*1: 09 model

Flexible & easy installation

The compact and whole-surface suction design provides flexible installation options, including floor-standing, embedded, half concealed, and wall mount installation to match the room layout.


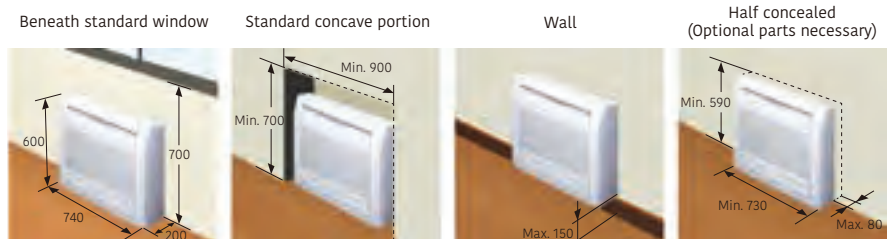


(Unit: mm)

* Concaved position installation with concealment is prohibited.

Low ambient operation

Factory-guaranteed cooling operation down to -10°C ambient temperature.

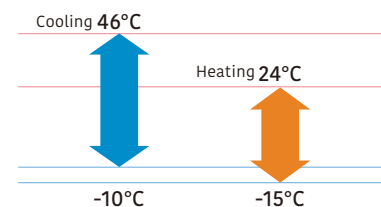

Smart device control (option)

With the optional WLAN adapter installed in the air conditioner, you can control it from anywhere with your smart device.

* See page C-020 for details on smart device control.




AIRSTAGE Mobile



10°C heat

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.

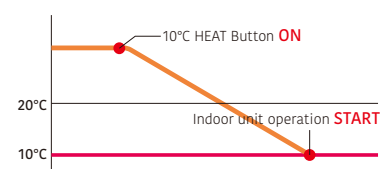




Model: AGE09KVCA / AGE12KVCA / AGE14KVCA



Wireless RC



For AGE09/12KVCA



For AGE14KVCA

Specifications

Model name	Indoor unit			AGE09KVCA	AGE12KVCA	AGE14KVCA
	Outdoor unit			AOEG09KVCA	AOEG12KVCA	AOEG14KVCA
Power Source				Single phase, ~230 V, 50 Hz		
Capacity	Cooling	Rated	kW	2.5	3.5	4.2
		Min.-Max.		0.9-3.5	0.9-4.0	0.9-5.2
	Heating	Rated		3.5	4.5	5.2
		Min.-Max.		0.9-5.1	0.9-5.3	0.9-6.3
Input Power	Cooling/Heating		kW	0.53/0.81	0.88/1.22	1.06/1.41
EER	Cooling		W/W	4.70	4.00	3.95
COP	Heating			4.30	3.70	3.70
Pdesign	Cooling/Heating (-10°C)		kW	2.50/2.60	3.50/3.50	4.20/4.20
SEER	Cooling		W/W	8.50	8.20	8.10
SCOP	Heating (Average)			4.30	4.10	4.00
Energy Efficiency Class	Cooling			A+++	A++	A++
	Heating (Average)			A+	A+	A+
Max. Operating Current	Cooling/Heating		A	7.0/8.5	7.0/8.5	11.0/12.0
Annual Energy Consumption	Cooling		kWh/a	103	149	181
	Heating (Average)			845	1,192	1,466
Moisture Removal			l/h	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	40/35/29/22	40/35/29/22	44/38/31/22
	Indoor (Heating)	H/M/L/Q		41/35/29/22	41/35/29/22	43/37/29/22
	Outdoor (Cooling/Heating)	High		43/47	45/51	51/50
Sound Power Level	Indoor (Cooling/Heating)	High		53/54	53/54	57/56
	Outdoor (Cooling/Heating)	High		58/61	61/64	63/63
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	570/1,530	570/1,530	650/2,210
	Indoor/Outdoor (Heating)	High		600/1,510	600/1,510	650/2,100
Net Dimensions	Indoor		mm	600 × 740 × 200	600 × 740 × 200	600 × 740 × 200
H x W x D	Outdoor		mm	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290
	Indoor		kg	14	14	14
Weight	Outdoor		kg	31	31	38
	Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)			mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)		0.85 (0.574)	0.85 (0.574)	0.94 (0.635)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

Simple remote controller (without operation mode):

UTY-RHRY

Simple remote controller:

UTY-RSRY

External switch controller: UTY-TERX

WLAN adapter:

UTY-TFSXZ1

FG-AC-WIF1Z1

UTY-TFSXJ3

Half Connect Kit:

UTR-STA

Communication Kit:

UTY-TWRXZ3

Network Converter for single split (DC power supply type): UTY-VTGX

Network Converter for single split (AC power supply type): UTY-VTGXV

Silver Ion Filter:


UTR-FA03-5

External Connect Kit:

UTY-XWZXZ5

Dimensions

(Unit: mm)

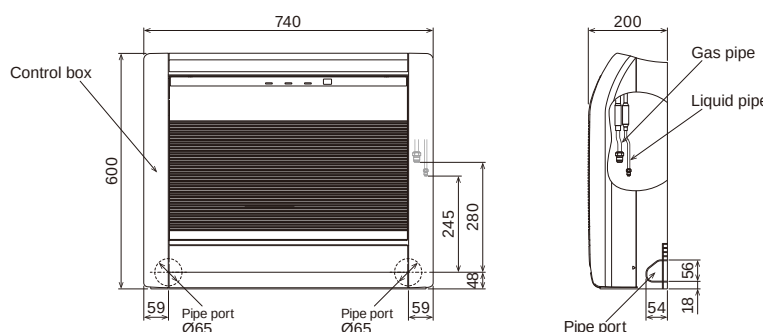

SPLIT

Ceiling



reddot winner 2020



(30/36/
45/54)



Light elegant design


The light-elegant, gently curved surface gives a sense of comfort and well-being.




Easy installation

The indoor unit can be easily installed under the ceiling thanks to the uniquely designed mounting kit.

1. Set mounting brackets

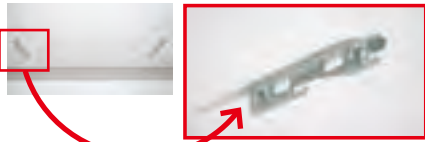

2. Hold up the ceiling unit and fit to the mounting brackets

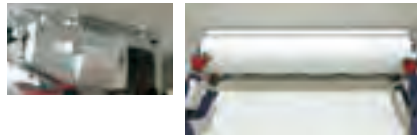

3. Attach with screws



Easy maintenance

The front panel can be opened without removing it for safe & speedy maintenance.



The drain pan can be removed for cleaning.



Components in the control box can be easily accessed from the wide side opening.



Flexible installation

The drain hose and pipe can be contained in the casing and connected in the right, left, angled, or downward direction.



Link up with a variety of central control system (Option)

Centralized control including facilities and equipment in addition to air conditioning is possible by linking up with MODBUS, KNX interfaces.



Central Control System





**Model: ABEG18KRTA / ABEG22KRTA / ABEG24KRTA / ABEG30KRTA / ABEG36KRTA / ABEG45KRTA
ABEG36KRTA [3-phase] / ABEG45KRTA [3-phase] / ABEG54KRTA [3-phase]**



ABEG18/22KRTA



ABEG24/30KRTA



ABEG36/45/54KRTA



For ABEG18/22KRTA



For ABEG24KRTA



For ABEG30/36KRTA



For ABEG45/54KRTA

Specifications

Model name	Indoor unit			ABEG18KRTA	ABEG22KRTA	ABEG24KRTA	ABEG30KRTA	ABEG36KRTA	ABEG45KRTA	ABEG36KRTA	ABEG45KRTA	ABEG54KRTA
	Outdoor unit			AOEG18KBTB	AOEG22KBTB	AOEG24KBTB	AOEG30KBTB	AOEG36KBTB	AOEG45KBTB	AOEG36KRTA	AOEG45KRTA	AOEG54KRTA
Power Source				Single phase, ~230 V, 50 Hz						3-phase, ~400 V, 50 Hz		
Capacity	Cooling	Rated	kW	5.2	6.0	6.8	8.5	9.5	12.1	9.5	12.1	13.4
		Min.-Max.		0.9-5.9	0.9-6.7	0.9-8.0	2.8-10.0	2.8-11.2	4.0-13.5	2.8-11.2	4.0-13.5	4.5-14.5
	Heating	Rated		6.0	7.0	7.5	10.0	10.8	13.5	10.8	13.5	15.5
		Min.-Max.		0.9-7.5	0.9-8.0	0.9-9.1	2.7-11.2	2.7-12.7	4.2-16.2	2.7-12.7	4.2-16.2	4.7-16.5
Input Power	Cooling/Heating		kW	1.55/1.62	1.87/1.95	2.14/1.97	2.65/2.77	2.96/2.88	4.22/3.84	2.96/2.88	4.22/3.84	4.45/4.43
EER	Cooling		W/W	3.35	3.21	3.18	3.21	3.21	2.87	3.21	2.87	3.01
COP	Heating			3.70	3.59	3.81	3.61	3.75	3.52	3.75	3.52	3.50
Pdesign	Cooling/Heating (-10°C)		kW	5.2/4.4	6.0/4.8	6.8/6.0	8.5/8.0	9.5/8.7	12.1/9.2	9.5/8.7	12.1/9.2	13.4/9.5
SEER	Cooling		W/W	6.2	6.1	6.2	6.1	6.37	6.24	6.37	6.24	5.88
SCOP	Heating (Average)			4.1	4.0	4.1	4.0	4.21	4.05	4.21	4.05	3.95
Energy Efficiency Class	Cooling			A++	A++	A++	A++	A++	-	A++	-	-
Class	Heating (Average)			A+	A+	A+	A+	A+	-	A+	-	-
η _c			%	-	-	-	-	-	246.8	-	246.8	232.2
η _h				-	-	-	-	-	158.9	-	158.9	155.0
Max. Operating Current	Cooling/Heating		A	12.1/12.1	12.6/12.6	13.6/13.6	22.6/22.6	22.6/22.6	28.5/28.5	10.5/10.5	14.0/14.0	14.0/14.0
Annual Energy Consumption	Cooling		kWh/a	293	344	384	486	524	-	524	-	-
	Heating			1,501	1,677	2,042	2,796	2,904	-	2,904	-	-
Moisture Removal			l/h	2.0	2.5	2.2	3.0	2.6	4.5	2.6	4.5	5.0
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/36/33/31	42/37/34/31	41/36/32/29	45/40/35/32	44/40/37/32	45/41/39/34	44/40/37/32	45/41/39/34	48/44/41/38
	Indoor (Heating)	H/M/L/Q		38/36/33/31	42/37/34/31	41/36/32/29	45/40/35/32	44/40/37/32	45/41/39/34	44/40/37/32	45/41/39/34	48/44/41/38
	Outdoor (Cooling/Heating)	High		50/50	51/51	53/54	53/55	55/55	57/57	55/55	57/57	57/59
Sound Power Level	Indoor (Cooling/Heating)	High	m³/h	53/53	57/57	56/56	60/60	59/59	60/60	59/59	60/60	63/63
	Outdoor (Cooling/Heating)	High		62/62	63/63	65/66	68/69	70/70	71/71	70/70	71/71	73/73
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	840/2,160	900/2,240	1,230/2,700	1,400/3,750	1,850/3,750	1,900/4,450	1,850/3,750	1,900/4,450	2,100/4,450
	Indoor/Outdoor (Heating)	High		840/1,830	900/1,960	1,230/2,700	1,400/3,750	1,800/3,750	1,850/4,450	1,800/3,750	1,850/4,450	2,100/4,450
Net Dimensions	Indoor		mm	235 × 1,080 × 705	235 × 1,080 × 705	235 × 1,390 × 705	235 × 1,390 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705
H x W x D	Outdoor		mm	632 × 799 × 290	632 × 799 × 290	716 × 820 × 315	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320
	Indoor		kg	24	24	31	31	38	38	38	38	38
Weight	Outdoor		kg	36	38	42	52	52	67	53	67	67
	Connection Pipe Diameter (Liquid/Gas)			6.35/12.7	6.35/12.7	6.35/12.7	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)			mm	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32	25/32
Max. Pipe Length (Pre-Charge)			m	30 (20)	30 (20)	30 (20)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference				20	25	25	30	30	30	30	30	30
Operating Range	Cooling		°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge			kg (CO2eq-T)	1.02 (0.689)	1.25 (0.844)	1.25 (0.844)	1.90 (1.283)	1.90 (1.283)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)

Optional parts

* For information on the compatibility of optional parts for Intesis products, please refer to the compatibility list at the end of the "Control system & Optional parts" chapter.

Wired Remote Controller (Design type):

UTY-RVRY

Compact wired remote controller:

UTY-RCRYZ1

Wired remote controller (touch panel):

UTY-RNRYZ5

Wired remote controller:

UTY-RLRY

Simple remote controller (without operation mode):

UTY-RHRY

Simple remote controller:

UTY-RSRY

External input and output PCB:

UTY-XCSX

External input and output PCB box:

UTZ-GXEA

WLAN adapter:

UTY-TFSXZ1

UTY-TFSXJ3

FG-AC-WIFI21

Drain pump unit:

UTR-DPB24T

IR receiver unit:

UTY-LBTYH

L-type Piping Kit:

UTP-FX24A (18/22/24)

UTP-FX35A (30/36/45/54)

Communication Kit: UTY-TWRXZ3

Network Converter for single split (DC power supply type): UTY-VTGX

Network Converter for single split (AC power supply type): UTY-VTGXV

External switch controller: UTY-TERX


External Connect Kit: UTY-XWZXZG

(Outdoor unit 30/36/45/54)

External Connect Kit: UTY-XWZXZ3

Dimensions

(Unit: mm)

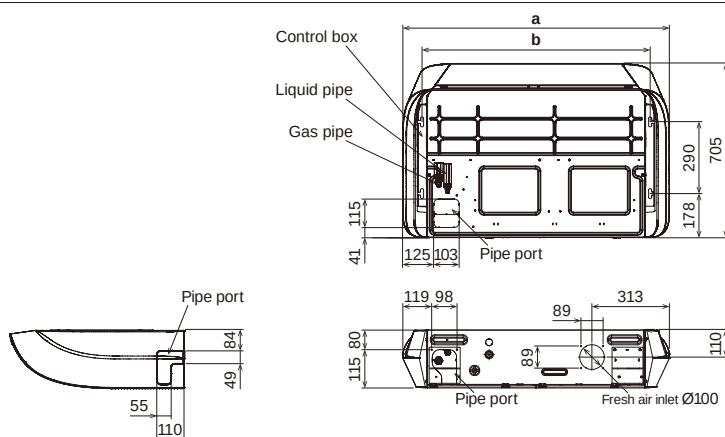

	ABEG 18/22KRTA	ABEG 24/30KRTA	ABEG 36/45/54 KRTA
a	1,080	1,390	1,700
b	923	1,233	1,543

Wall-mounted Specifications





Designer series High-Spec & Design (WLAN adapter Internal Models)

Model name	Indoor unit			ASYG07KGTF	ASYG09KGTF	ASYG12KGTF	ASYG14KGTF
	Outdoor unit			AOYG07KGCB	AOYG09KGCB	AOYG12KGCB	AOYG14KGCB
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.0	2.5	3.4	4.2
		Min.-Max.		0.9-3.2	0.9-3.4	0.9-4.1	0.9-4.5
	Heating	Rated		2.5	2.8	4.0	5.4
		Min.-Max.		0.9-5.2	0.9-5.4	0.9-6.1	0.9-6.4
Input Power	Cooling/Heating		kW	0.400/0.500	0.555/0.560	0.805/0.910	1.175/1.350
EER	Cooling		W/W	5.00	4.50	4.22	3.57
COP	Heating			5.00	5.00	4.40	4.00
Pdesign	Cooling/Heating (-10°C)		kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		W/W	8.10	8.90	8.70	7.90
SCOP	Heating (Average)			5.30	5.20	5.20	4.50
Energy Efficiency Class	Cooling			A++	A+++	A+++	A++
	Heating (Average)			A+++	A+++	A+++	A+
Max. Operating Current	Cooling/Heating		A	6.5/9.0	6.5/9.0	6.5/9.0	9.0/10.5
Annual Energy Consumption	Cooling		kWh/a	86	98	137	186
	Heating			606	645	673	1,242
Moisture Removal			l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/33/29/19	40/34/29/19	40/35/30/19	43/36/30/20
	Indoor (Heating)	H/M/L/Q		41/35/31/21	42/36/31/21	42/38/33/21	44/39/33/24
	Outdoor (Cooling/Heating)	High		46/46	46/48	50/50	50/50
Sound Power Level	Indoor (Cooling/Heating)	High		54/56	55/57	56/58	57/59
	Outdoor (Cooling/Heating)	High		61/62	61/63	65/66	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	650/1,610	700/1,610	700/1,680	770/1,680
	Indoor/Outdoor (Heating)	High		720/1,560	750/1,610	770/1,580	800/1,580
Net Dimensions	Indoor		mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
H x W x D	Outdoor		mm	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290
	Indoor		kg	10	10	10	10
	Outdoor		kg	30	30	31	32
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52			
Drain Hose Diameter (I.D./O.D.)				13.8/15.0 to 16.8			
Max. Pipe Length (Pre-Charge)			m	20 (15)			
Max. Height Difference				15			
Operating Range	Cooling		°CDB	-10 to 46			
	Heating			-15 to 24			
Refrigerant	Type (Global Warming Potential)			R32 (675)			
	Charge	kg (CO2eq-T)		0.75 (0.506)	0.75 (0.506)	0.85 (0.574)	0.85 (0.574)

Designer series High Spec & Design (WLAN adapter Option Models)

Model name	Indoor unit			ASYG07KGTE	ASYG09KGTE	ASYG12KGTE	ASYG14KGTE
	Outdoor unit			AOYG07KGCA	AOYG09KGCA	AOYG12KGCA	AOYG14KGCA
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.0	2.5	3.4	4.2
		Min.-Max.		0.9-3.2	0.9-3.4	0.9-4.1	0.9-4.5
	Heating	Rated		2.5	2.8	4.0	5.4
		Min.-Max.		0.9-5.2	0.9-5.4	0.9-6.1	0.9-6.4
Input Power	Cooling/Heating		kW	0.400/0.500	0.555/0.560	0.805/0.910	1.175/1.350
EER	Cooling		W/W	5.00	4.50	4.22	3.57
COP	Heating			5.00	5.00	4.40	4.00
Pdesign	Cooling/Heating (-10°C)		kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		W/W	9.10	9.20	9.20	8.30
SCOP	Heating (Average)			5.30	5.20	5.20	4.50
Energy Efficiency Class	Cooling			A+++	A+++	A+++	A++
	Heating (Average)			A+++	A+++	A+++	A+
Max. Operating Current	Cooling/Heating		A	6.5/9.0	6.5/9.0	6.5/9.0	9.0/10.5
Annual Energy Consumption	Cooling		kWh/a	77	95	129	177
	Heating			607	645	672	1,242
Moisture Removal			l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/33/29/19	40/34/29/19	40/35/30/19	43/36/30/20
	Indoor (Heating)	H/M/L/Q		41/35/31/21	42/36/31/21	42/38/33/21	44/39/33/24
	Outdoor (Cooling/Heating)	High		46/46	46/48	50/50	50/50
Sound Power Level	Indoor (Cooling/Heating)	High		54/56	55/57	56/58	57/59
	Outdoor (Cooling/Heating)	High		61/62	61/63	65/66	65/66
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	650/1,610	700/1,610	700/1,680	770/1,680
	Indoor/Outdoor (Heating)	High		720/1,560	750/1,610	770/1,580	800/1,580
Net Dimensions	Indoor		mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
H x W x D	Outdoor		mm	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290	542 × 799 × 290
Weight	Indoor		kg	10	10	10	10
	Outdoor		kg	30	30	31	32
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52			
Drain Hose Diameter (I.D./O.D.)				13.8/15.0 to 16.8			
Max. Pipe Length (Pre-Charge)			m	20 (15)			
Max. Height Difference				15			
Operating Range	Cooling		°CDB	-10 to 46			
	Heating			-15 to 24			
Refrigerant	Type (Global Warming Potential)		kg (CO2eq-T)	R32 (675)			
	Charge			0.75 (0.506)	0.75 (0.506)	0.85 (0.574)	0.85 (0.574)

Designer series Cool Beauty Design



Model name	Indoor unit			ASYG07KETE ASYG07KETE-B	ASYG09KETE ASYG09KETE-B	ASYG12KETE ASYG12KETE-B	ASYG14KETE ASYG14KETE-B
	Outdoor unit			AOYG07KETA	AOYG09KETA	AOYG12KETA	AOYG14KETA
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.0	2.5	3.4	4.2
		Min.-Max.		0.9 - 3.0	0.9 - 3.2	0.9 - 3.9	0.9 - 4.4
	Heating	Rated		2.5	2.8	4.0	5.4
		Min.-Max.		0.9 - 3.4	0.9 - 4.0	0.9 - 5.3	0.9 - 6.0
Input Power	Cooling/Heating		kW	0.450/0.555	0.630/0.620	0.935/0.960	1.220/1.410
EER	Cooling		W/W	4.43	3.97	3.65	3.44
COP	Heating		W/W	4.52	4.52	4.17	3.83
Pdesign	Cooling/Heating (-10°C)		kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		W/W	7.40	7.40	7.30	6.90
SCOP	Heating (Average)		W/W	4.10	4.10	4.40	4.10
Energy Efficiency Class	Cooling			A++	A++	A++	A++
	Heating (Average)			A+	A+	A+	A+
Max. Operating Current	Cooling/Heating		A	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling		kWh/a	95	118	163	213
	Heating			785	819	795	1,367
Moisture Removal			l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/33/29/20	40/34/29/20	40/35/30/20	43/36/30/20
	Indoor (Heating)	H/M/L/Q		41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Outdoor (Cooling/Heating)	High		46/46	46/46	50/50	50/50
	Indoor (Cooling/Heating)	High		54/56	55/57	55/58	57/59
Sound Power Level	Outdoor (Cooling/Heating)	High	61/61	61/62	65/65	65/66	
	Indoor/Outdoor (Cooling)	High	650/1,650	700/1,650	700/1,700	770/1,680	
Airflow Rate	Indoor/Outdoor (Heating)	High	m³/h	720/1,450	750/1,450	770/1,470	800/1,580
Net Dimensions	Indoor		mm	295 × 950 (wall side: 840) × 230			
H x W x D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290
Weight	Indoor		kg	11	11	11	11.5
	Outdoor		kg	23	23	25	31
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)				13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15	15
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	0.6 (0.405)	0.6 (0.405)	0.7 (0.473)	0.85 (0.574)	

Standard series High-Efficiency & Comfort



Model name	Indoor unit	W-LAN Adapter Internal Models		ASYG07KMCF	ASYG09KMCF	ASYG12KMCF	ASYG14KMCF
		W-LAN Adapter Option Models		ASYG07KMCE	ASYG09KMCE	ASYG12KMCE	ASYG14KMCE
	Outdoor unit			AOYG07KMCC	AOYG09KMCC	AOYG12KMCC	AOYG14KMCC
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.0	2.5	3.4	4.2
		Min.-Max.		0.9-3.0	0.9-3.2	0.9-3.9	0.9-4.4
	Heating	Rated		2.5	2.8	4.0	5.4
		Min.-Max.		0.9-3.4	0.9-4.0	0.9-5.3	0.9-6.0
Input Power	Cooling/Heating		kW	0.450/0.555	0.630/0.620	0.935/0.960	1.220/1.410
EER	Cooling		W/W	4.43	3.97	3.65	3.44
COP	Heating		W/W	4.52	4.52	4.17	3.83
Pdesign	Cooling/Heating (-10°C)		kW	2.0/2.3	2.5/2.4	3.4/2.5	4.2/4.0
SEER	Cooling		W/W	7.40	7.40	7.30	6.90
SCOP	Heating (Average)			4.10	4.10	4.40	4.10
Energy Efficiency Class	Cooling			A++	A++	A++	A++
	Heating (Average)			A+	A+	A+	A+
Max. Operating Current	Cooling/Heating		A	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0
Annual Energy Consumption	Cooling		kWh/a	95	118	163	213
	Heating			785	819	795	1367
Moisture Removal			l/h	1.0	1.3	1.8	2.1
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/33/29/20	40/34/29/20	40/35/30/20	43/36/30/20
	Indoor (Heating)	H/M/L/Q		41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
	Outdoor (Cooling/Heating)	High		46/46	46/46	50/50	50/50
Sound Power Level	Indoor (Cooling/Heating)	High		54/56	55/57	55/58	57/59
	Outdoor (Cooling/Heating)	High	61/61	61/62	65/65	65/66	
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	650/1,650	700/1,650	700/1,700	770/1,680
	Indoor/Outdoor (Heating)	High		720/1,450	750/1,450	780/1,470	820/1,580
Net Dimensions	Indoor		mm	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222	270 × 834 × 222
H x W x D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290
Weight	Indoor		kg	10	10	10	10
	Outdoor		kg	22	22	24	31
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)				13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8	13.8/15.0 to 16.8
Max. Pipe Length (Pre-Charge)			m	20 (15)	20 (15)	20 (15)	20 (15)
Max. Height Difference				15	15	15	15
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	0.6 (0.405)	0.6 (0.405)	0.7 (0.473)	0.85 (0.574)	

ECO Series Lineup Specifications



Compact Cassette



For more information and the latest updates, click here



Model name	Indoor unit			AUXG09KVLV	AUXG12KVLV	AUXG14KVLV	AUXG18KVLV	AUXG22KVLV	AUXG24KVLV
	Outdoor unit			AOEG09KATA	AOEG12KATA	AOEG14KATA	AOEG18KATA	AOEG22KATA	AOEG24KATA
Power Source				Single phase, ~230 V, 50 Hz					
Capacity	Cooling	Rated	kW	2.5	3.5	4.3	5.2	6.0	6.8
		Min.-Max.		0.9-2.7	0.9-3.7	0.9-4.5	0.9-5.4	0.9-6.3	0.9-7.4
	Heating	Rated		3.2	4.1	5.0	6.0	7.0	7.5
		Min.-Max.		0.9-3.9	0.9-4.4	0.9-5.3	0.9-6.3	0.9-7.4	0.9-8.6
Input Power	Cooling/Heating		kW	0.68/0.88	1.09/1.17	1.37/1.42	1.69/1.72	1.95/2.00	2.26/2.08
EER	Cooling		W/W	3.68	3.21	3.14	3.08	3.08	3.01
COP	Heating			3.64	3.50	3.52	3.49	3.50	3.61
Pdesign	Cooling/Heating (-10°C)		kW	2.5/2.3	3.5/2.8	4.3/3.2	5.2/3.8	6.0/4.4	6.8/5.4
SEER	Cooling		W/W	6.2	6.1	6.1	6.1	6.1	5.9
SCOP	Heating			4.0	4.0	4.0	3.9	3.9	3.8
Energy Efficiency Class	Cooling			A++	A++	A++	A++	A++	A+
	Heating			A+	A+	A+	A	A	A
Max. Operating Current	Cooling/Heating		A	6.9/6.9	7.7/7.7	9.2/9.2	10.1/10.1	11.6/11.6	12.6/12.6
Annual Energy Consumption	Cooling		kWh/a	141	201	247	298	344	403
	Heating			804	979	1,120	1,362	1,578	1,988
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	33/31/29/27	37/34/30/27	38/34/30/27	38/34/30/26	44/42/36/30	49/44/36/30
	Indoor (Heating)	H/M/L/Q		34/32/29/27	37/34/31/29	43/38/34/30	43/38/34/30	45/43/40/33	49/45/40/33
Sound Power Level	Outdoor (Cooling/Heating)	High		47/48	49/50	50/51	51/52	52/53	54/55
	Indoor (Cooling/Heating)	High		46/47	49/49	50/55	50/55	56/57	59/61
Airflow Rate	Outdoor (Cooling/Heating)	High	60/60	62/62	63/63	63/64	64/65	66/67	
	Indoor/Outdoor (Cooling)	High	m³/h	540/1,610	600/1,630	680/1,670	680/1,710	830/2,240	930/2,885
	Indoor/Outdoor (Heating)	High		540/1,550	600/1,410	800/1,580	800/1,840	860/2,240	930/2,350
Net Dimensions	Indoor		mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
H × W × D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290
Weight	Indoor/Outdoor		kg	15/23	15/25	15/32	15/33	16/36	16/38
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70	6.35/12.70
Max. Pipe Length (Pre-Charge)			m	15 (15)	15 (15)	20 (15)	20 (15)	25 (15)	25 (20)
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
Cassette Grille	Model name			UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W
	Dimensions (H × W × D)		mm	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620	49 × 620 × 620
	Weight		kg	2.3	2.3	2.3	2.3	2.3	2.3

Circular Cassette (Slim type)



For more information and the latest updates, click here



Model name	Indoor unit			AUXG18KRLB	AUXG22KRLB	AUXG24KRLB
	Outdoor unit			AOEG18KATA	AOEG22KATA	AOEG24KATA
Power Source				Single phase, ~230 V, 50 Hz		
Capacity	Cooling	Rated	kW	5.2	6.0	6.8
		Min.-Max.		0.9-5.4	0.9-6.3	0.9-7.4
	Heating	Rated		6.0	7.0	7.5
		Min.-Max.		0.9-6.3	0.9-7.4	0.9-8.6
Input Power	Cooling/Heating		kW	1.60/1.66	1.85/1.93	2.12/1.97
EER	Cooling		W/W	3.25	3.24	3.21
COP	Heating			3.61	3.63	3.81
Pdesign	Cooling/Heating (-10°C)		kW	5.2/3.8	6.0/4.4	6.8/5.4
SEER	Cooling		W/W	6.2	6.2	6.1
SCOP	Heating			4.1	4.1	4.0
Energy Efficiency Class	Cooling			A++	A++	A++
	Heating			A+	A+	A+
Max. Operating Current	Cooling/Heating		A	10.1/10.1	11.6/11.6	12.6/12.6
Annual Energy Consumption	Cooling		kWh/a	293	338	390
	Heating			1,297	1,502	1,887
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	33/32/31/28	33/32/31/28	35/33/32/29
	Indoor (Heating)	H/M/L/Q		33/32/31/28	33/32/31/28	35/33/32/29
	Outdoor (Cooling/Heating)	High		51/52	52/53	54/55
Sound Power Level	Indoor (Cooling/Heating)	High		47/47	49/49	49/49
	Outdoor (Cooling/Heating)	High		63/64	64/65	66/67
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	1,050/1,710	1,050/2,240	1,150/2,885
	Indoor/Outdoor (Heating)	High		1,050/1,840	1,050/2,240	1,150/2,350
Net Dimensions	Indoor	mm	mm	246 × 840 × 840	246 × 840 × 840	246 × 840 × 840
H x W x D	Outdoor	mm		542 × 799 × 290	632 × 799 × 290	632 × 799 × 290
Weight	Indoor/Outdoor		kg	23/33	23/36	24/38
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/12.70	6.35/12.70	6.35/12.70
Max. Pipe Length (Pre-Charge)			m	20 (15)	25 (15)	25 (20)
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)
Cassette Grille	Model name			UTG-UKYA-W: White wired remote controller (touch panel) UTG-UKYC-W: White/UTG-UKYA-B*1: Black		
	Dimensions (H × W × D)		mm	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950
	Weight		kg	6.0	6.0	6.0

*1: IR Receiver Kit and Human Sensor Kit cannot be connected.

Circular Cassette (Large type)



For more information and the latest updates, click here



Model name	Indoor unit			AUXG30KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB	AUXG36KRLB	AUXG45KRLB	AUXG54KRLB	
	Outdoor unit			AOEG30KATA	AOEG36KATA	AOEG45KATA	AOEG54KATA	AOEG36KQTA	AOEG45KQTA	AOEG54KQTA	
Power Source				Single phase, ~230 V, 50 Hz				3-phase, ~400 V, 50 Hz			
Capacity	Cooling	Rated	kW	8.5	9.5	12.1	13.4	9.5	12.1	13.4	
		Min.-Max.		2.8-9.6	2.8-10.6	4.0-12.6	4.5-13.8	2.8-10.6	4.0-12.6	4.5-13.8	
	Heating	Rated		10.0	10.8	13.5	13.7	10.8	13.5	13.7	
		Min.-Max.		2.7-10.8	2.7-12.5	4.2-15.0	4.7-16.0	2.7-12.5	4.2-15.0	4.7-16.0	
Input Power		Cooling/Heating		kW	2.56/2.64	3.06/2.58	4.32/3.77	4.87/4.86	3.06/2.58	4.32/3.77	4.87/4.86
EER	Cooling		W/W	3.32	3.10	2.80	2.75	3.10	2.80	2.75	
COP	Heating			3.79	4.19	3.58	3.19	4.19	3.58	3.19	
Pdesign	Cooling/Heating (-10°C)		kW	8.5/8.0	9.5/8.7	12.1/9.2	13.4/9.5	9.5/8.7	12.1/9.2	13.4/9.5	
SEER	Cooling		W/W	6.1	6.1	5.40	6.00	6.1	5.40	6.00	
SCOP	Heating			4.0	4.0	3.80	3.85	4.0	3.80	3.85	
Energy Efficiency Class	Cooling			A++	A++	-	-	A++	-	-	
	Heating			A+	A+	-	-	A+	-	-	
nc				%	-	-	213.0	237.0	-	213.0	237.0
nh					-	-	149.0	151.0	-	149.0	151.0
Max. Operating Current	Cooling/Heating			A	22.5/22.5	22.5/22.5	28.1/28.1	28.1/28.1	10.5/10.5	13.6/13.6	13.6/13.6
Annual Energy Consumption	Cooling			kWh/a	488	545	-	-	545	-	-
	Heating				2,794	3,044	-	-	3,044	-	-
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36	
	Indoor (Heating)	H/M/L/Q		40/38/36/33	44/41/38/34	46/42/39/35	47/43/40/36	44/41/38/34	46/42/39/35	47/43/40/36	
Outdoor (Cooling/Heating)		High		53/55	55/55	58/59	58/61	55/55	60/60	61/61	
Sound Power Level	Indoor (Cooling/Heating)	High		54/54	58/58	60/60	61/61	58/58	-/-	-/-	
	Outdoor (Cooling/Heating)	High	68/69	70/70	72/73	74/75	70/70	72/73	74/75		
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	1,600/3,750	1,870/3,750	2,000/4,450	2,100/4,450	1,870/3,750	2,000/4,450	2,100/4,450	
	Indoor/Outdoor (Heating)	High		1,600/3,750	1,870/3,750	2,000/4,450	2,100/4,780	1,870/3,750	2,000/4,450	2,100/4,780	
Net Dimensions	Indoor		mm	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840	
H × W × D	Outdoor		mm	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	
Weight	Indoor/Outdoor			kg	26/52	29/52	29/61	29/63	29/53	29/62	29/63
Connection Pipe Diameter (Liquid/Gas)				mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Max. Pipe Length (Pre-Charge)				m	30 (30)	30 (30)	30 (30)	30 (30)	30 (30)	30 (30)	30 (30)
Operating Range	Cooling			°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating				-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)				R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
Cassette Grille	Model name			UTG-UKYA-W: White wired remote controller (touch panel) UTG-UKYC-W: White/UTG-UKYA-B*1: Black							
	Dimensions (H × W × D)			mm	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950	53 × 950 × 950
	Weight			kg	6.0	6.0	6.0	6.0	6.0	6.0	6.0

*1: IR Receiver Kit and Human Sensor Kit cannot be connected.

Slim Duct



For more information and the latest updates, click here



Model name	Indoor unit			ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP
	Outdoor unit			AOEG09KATA	AOEG12KATA	AOEG14KATA	AOEG18KATA
Power Source				Single phase, ~230 V, 50 Hz			
Capacity	Cooling	Rated	kW	2.5	3.5	4.3	5.2
		Min.-Max.		0.9-2.7	0.9-3.7	0.9-4.5	0.9-5.4
	Heating	Rated		3.2	4.1	5.0	6.0
		Min.-Max.		0.9-3.9	0.9-4.4	0.9-5.3	0.9-6.3
Input Power	Cooling/Heating		kW	0.69/0.88	1.09/1.17	1.37/1.42	1.66/1.71
EER	Cooling		W/W	3.62	3.21	3.14	3.13
COP	Heating			3.64	3.50	3.52	3.51
Pdesign	Cooling/Heating (-10°C)		kW	2.5/2.3	3.5/2.8	4.3/3.2	5.2/3.8
SEER	Cooling		W/W	5.9	5.8	5.6	5.8
SCOP	Heating			3.8	3.8	3.8	3.8
Energy Efficiency Class	Cooling			A+	A+	A+	A+
	Heating			A	A	A	A
Max. Operating Current	Cooling/Heating		A	6.9/6.9	7.7/7.7	9.2/9.2	10.1/10.1
Annual Energy Consumption	Cooling		kWh/a	148	211	269	313
	Heating			847	1,031	1,177	1,398
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	28/27/26/25	29/28/26/25	32/30/28/26	32/30/29/27
	Indoor (Heating)	H/M/L/Q		28/26/25/24	29/28/26/24	32/30/28/25	32/30/29/27
	Outdoor (Cooling/Heating)	High		47/48	49/50	50/51	51/52
Sound Power Level	Indoor (Cooling/Heating)	High		57/57	58/58	60/60	58/58
	Outdoor (Cooling/Heating)	High	60/60	62/62	63/63	63/64	
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	600/1,610	650/1,630	800/1,670	940/1,710
	Indoor/Outdoor (Heating)	High		600/1,550	650/1,410	800/1,580	940/1,840
Static pressure range (Standard)			Pa	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)
Net Dimensions	Indoor		mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620
H × W × D	Outdoor		mm	541 × 663 × 290	541 × 663 × 290	542 × 799 × 290	542 × 799 × 290
Weight	Indoor/Outdoor		kg	17/23	17/25	17/32	20/33
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70
Max. Pipe Length (Pre-Charge)			m	15 (15)	15 (15)	20 (15)	20 (15)
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)

Medium Static Pressure Duct (High-Efficiency & Comfort)



For more information and the latest updates, click here



Model name	Indoor unit			ARXH12KMTAP	ARXH14KMTAP	ARXH18KMTAP	ARXH22KMTAP	ARXH24KMTAP
	Outdoor unit			AOEG12KATA	AOEG14KATA	AOEG18KATA	AOEG22KATA	AOEG24KATA
Power Source				Single phase, ~230 V, 50 Hz				
Capacity	Cooling	Rated	kW	3.5	4.3	5.2	6.0	6.8
		Min.-Max.		0.9-3.7	0.9-4.5	0.9-5.4	0.9-6.3	0.9-7.4
	Heating	Rated		4.1	5.0	6.0	7.0	7.5
		Min.-Max.		0.9-4.4	0.9-5.3	0.9-6.3	0.9-7.4	0.9-8.6
Input Power	Cooling/Heating		kW	1.060 / 1.170	1.340 / 1.420	1.730 / 1.820	1.85 / 1.97	2.06 / 1.97
EER	Cooling		W/W	3.30	3.21	3.00	3.24	3.30
COP	Heating			3.50	3.52	3.30	3.55	3.81
Pdesign	Cooling/Heating (-10°C)		kW	3.5 / 2.8	4.3 / 3.2	5.2 / 3.8	6.0 / 4.4	6.8 / 5.4
SEER	Cooling		W/W	6.00	5.80	5.90	6.00	6.00
SCOP	Heating (Average)			3.90	3.90	3.90	3.90	3.90
Energy Efficiency Class	Cooling			A+	A+	A+	A+	A+
	Heating (Average)			A	A	A	A	A
Max. Operating Current	Cooling/Heating		A	7.7 / 7.7	9.2 / 9.2	10.1 / 10.1	11.6 / 11.6	12.6 / 12.6
Annual Energy Consumption	Cooling		kWh/a	212	267	316	358	405
	Heating			1,005	1,148	1,363	1,578	1,936
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	29 / 27 / 25 / 23	32 / 29 / 27 / 25	33 / 30 / 28 / 26	32 / 28 / 25 / 24	34 / 30 / 28 / 26
	Indoor (Heating)	H/M/L/Q		29 / 27 / 25 / 23	32 / 29 / 27 / 25	33 / 30 / 28 / 26	32 / 28 / 25 / 24	34 / 30 / 28 / 26
	Outdoor (Cooling/Heating)	High		49 / 50	50 / 51	51 / 52	52 / 53	54 / 55
Sound Power Level	Indoor (Cooling/Heating)	High	dB(A)	58 / 58	59 / 59	60 / 60	58 / 58	60 / 60
	Outdoor (Cooling/Heating)	High		62 / 62	63 / 63	63 / 64	64 / 65	66 / 67
Airflow Rate	Indoor/Outdoor (Cooling)	High	m³/h	650 / 1,630	800 / 1,670	840 / 1,710	1,150 / 2,240	1,230 / 2,885
	Indoor/Outdoor (Heating)	High		650 / 1,410	800 / 1,580	840 / 1,840	1,150 / 2,240	1,230 / 2,350
Static pressure range (Standard)			Pa	30 to 150 (40)	30 to 150 (40)	30 to 150 (40)	30 to 150 (40)	30 to 150 (50)
Net Dimensions	Indoor		mm	240 × 700 × 700	240 × 700 × 700	240 × 700 × 700	240 × 1,000 × 700	240 × 1,000 × 700
H x W x D	Outdoor		mm	541 × 663 × 290	542 × 799 × 290	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290
Weight	Indoor/Outdoor		kg	24/25	24/32	24/33	31/36	31/38
Connection Pipe Diameter (Liquid/Gas)			mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.70	6.35 / 12.70
Max. Pipe Length (Pre-Charge)			m	15 (15)	20 (15)	20 (15)	25 (15)	25 (20)
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)

Medium Static Pressure Duct (High-Efficiency & Comfort)



For more information and the latest updates, click here



Model name	Indoor unit			ARXH30KMTAP	ARXH36KMTAP	ARXH45KMTAP	ARXH36KMTAP	ARXH45KMTAP	
	Outdoor unit			AOEG30KATA	AOEG36KATA	AOEG45KATA	AOEG36KQTA	AOEG45KQTA	
Power Source				Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz		
Capacity	Cooling	Rated	kW	8.5	9.5	12.1	9.5	12.1	
		Min.-Max.		2.8-9.6	2.8-10.6	4.0-12.6	2.8-10.6	4.0-12.6	
	Heating	Rated		10.0	10.8	13.5	10.8	13.5	
		Min.-Max.		2.7-10.8	2.7-12.5	4.2-15.0	2.7-12.5	4.2-15.0	
Input Power	Cooling/Heating		kW	2.69 / 2.63	3.13 / 2.88	4.84 / 4.18	3.13 / 2.88	4.84 / 4.18	
EER	Cooling		W/W	3.16	3.04	2.50	3.04	2.50	
COP	Heating			3.80	3.75	3.23	3.75	3.23	
Pdesign	Cooling/Heating (-10°C)		kW	8.5 / 8.0	9.5 / 8.7	12.1 / 9.2	9.5 / 8.7	12.1 / 9.2	
SEER	Cooling		W/W	5.80	5.60	4.90	5.60	4.90	
SCOP	Heating (Average)			3.90	3.90	3.80	3.90	3.80	
Energy Efficiency Class	Cooling			A+	A+	-	A+	-	
	Heating (Average)			A	A	-	A	-	
η _C				%	-	193.0	-	193.0	
η _H				-	149.0	-	149.0		
Max. Operating Current	Cooling/Heating		A	22.5 / 22.5	22.5 / 22.5	28.1 / 28.1	10.5 / 10.5	13.6 / 13.6	
Annual Energy Consumption	Cooling		kWh/a	520	601	-	601	-	
	Heating			2,867	3,118	-	3,118	-	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38 / 34 / 31 / 28	38 / 34 / 31 / 28	40 / 36 / 32 / 29	38 / 34 / 31 / 28	40 / 36 / 32 / 29	
	Indoor (Heating)	H/M/L/Q		38 / 34 / 31 / 28	38 / 34 / 31 / 28	40 / 36 / 32 / 29	38 / 34 / 31 / 28	40 / 36 / 32 / 29	
Sound Power Level	Outdoor (Cooling/Heating)	High		53 / 55	55 / 55	58 / 59	55 / 55	58 / 59	
	Indoor (Cooling/Heating)	High		64 / 64	65 / 65	67 / 67	65 / 65	67 / 67	
Airflow Rate	Outdoor (Cooling/Heating)	High	m³/h	68 / 69	70 / 70	72 / 73	70 / 70	72 / 73	
	Indoor/Outdoor (Cooling)	High		1,950 / 3,750	2,070 / 3,750	2,160 / 4,450	2,070 / 3,750	2,160 / 4,450	
Static pressure range (Standard)	Indoor/Outdoor (Heating)			High	1,950 / 3,750	2,070 / 3,750	2,160 / 4,450	2,070 / 3,750	2,160 / 4,450
	Static pressure range (Standard)			Pa	30 to 150 (50)	30 to 150 (50)	30 to 150 (60)	30 to 150 (50)	30 to 150 (60)
Net Dimensions H x W x D	Indoor		mm	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	240 × 1,400 × 700	
	Outdoor		mm	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	
Weight	Indoor/Outdoor		kg	42/52	42/52	42/61	42/53	42/62	
Connection Pipe Diameter (Liquid/Gas)				mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
Max. Pipe Length (Pre-Charge)				m	30 (30)	30 (30)	30 (30)	30 (30)	
Operating Range	Cooling		°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	
	Heating			-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	



Medium Static Pressure Duct (Standard)



For more information and the latest updates, click here



Model name	Indoor unit			ARXG22KMLB	ARXG24KMLA	ARXG30KMLA	ARXG36KMLA	ARXG45KMLA	ARXG36KMLA	ARXG45KMLA	
	Outdoor unit			AOEG22KATA	AOEG24KATA	AOEG30KATA	AOEG36KATA	AOEG45KATA	AOEG36KQTA	AOEG45KQTA	
Power Source				Single phase, ~230 V, 50 Hz						3-phase, ~400 V, 50 Hz	
Capacity	Cooling	Rated	kW	6.0	6.8	8.5	9.5	12.1	9.5	12.1	
		Min.-Max.		0.9-6.3	0.9-7.4	2.8-9.6	2.8-10.6	4.0-12.6	2.8-10.6	4.0-12.6	
	Heating	Rated		7.0	7.5	10.0	10.8	13.5	10.8	13.5	
		Min.-Max.		0.9-7.4	0.9-8.6	2.7-10.8	2.7-12.5	4.2-15.0	2.7-12.5	4.2-15.0	
Input Power		Cooling/Heating	kW	1.92/2.00	2.19/2.00	2.78/2.77	3.13/3.03	4.84/4.18	3.13/3.03	4.84/4.18	
EER	Cooling		W/W	3.13	3.11	3.06	3.04	2.50	3.04	2.50	
COP	Heating			3.50	3.75	3.61	3.56	3.23	3.56	3.23	
Pdesign	Cooling/Heating (-10°C)		kW	6.0/4.4	6.8/5.4	8.5/8.0	9.5/8.7	12.1/9.2	9.5/8.7	12.1/9.2	
SEER	Cooling		W/W	5.8	5.9	5.8	5.6	4.85	5.6	4.85	
SCOP	Heating			3.8	3.9	3.9	3.9	3.55	3.9	3.55	
Energy Efficiency Class	Cooling			A+	A+	A+	A+	-	A+	-	
	Heating			A	A	A	A	-	A	-	
η _C				%	-	-	-	-	191.0	-	191.0
η _H					-	-	-	-	139.0	-	139.0
Max. Operating Current	Cooling/Heating		A	11.6/11.6	12.6/12.6	22.5/22.5	22.5/22.5	28.1/28.1	10.5/10.5	13.6/13.6	
Annual Energy Consumption	Cooling			kWh/a	362	403	513	594	-	594	-
	Heating				1,620	1,935	2,871	3,122	-	3,122	-
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	31/29/27/25	31/29/27/25	39/35/30/26	39/35/30/26	42/38/32/28	39/35/30/26	42/38/32/28	
	Indoor (Heating)	H/M/L/Q		31/29/27/25	31/29/27/25	42/35/30/26	42/35/30/26	42/38/32/28	42/35/30/26	42/38/32/28	
Sound Power Level	Outdoor (Cooling/Heating)	High		52/53	54/55	53/55	55/55	58/59	55/55	58/59	
	Indoor (Cooling/Heating)	High		60/62	60/62	65/69	65/70	68/70	65/70	68/70	
Airflow Rate	Outdoor (Cooling/Heating)	High	m³/h	64/65	66/67	68/69	70/70	72/73	70/70	72/73	
	Indoor/Outdoor (Cooling)	High		1,100/2,240	1,100/2,885	1,900/3,750	1,900/3,750	2,100/4,450	1,900/3,750	2,100/4,450	
Indoor/Outdoor (Heating)			High	1,100/2,240	1,100/2,350	2,100/3,750	2,100/3,750	2,100/4,450	2,100/3,750	2,100/4,450	
Static pressure range (Standard)			Pa	30 - 150 (35)	30 - 150 (35)	30 - 150 (47)	30 - 150 (47)	30 - 150 (60)	30 - 150 (47)	30 - 150 (60)	
Net Dimensions H x W x D	Indoor			mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	
	Outdoor			mm	632 × 799 × 290	632 × 799 × 290	788 × 940 × 320	788 × 940 × 320	998 × 940 × 320	788 × 940 × 320	
Weight	Indoor/Outdoor			kg	35/36	35/38	38/52	38/52	39/61	38/53	
Connection Pipe Diameter (Liquid/Gas)				mm	6.35/12.70	6.35/12.70	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	
Max. Pipe Length (Pre-Charge)				m	25 (15)	25 (20)	30 (30)	30 (30)	30 (30)	30 (30)	
Operating Range	Cooling			°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	
	Heating				-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)				R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	

Ceiling



For more information and the latest updates, click here






Model name	Indoor unit			ABEG18KRTA	ABEG22KRTA	ABEG24KRTA	ABEG30KRTA	ABEG36KRTA	ABEG45KRTA	ABEG36KRTA	ABEG45KRTA	
	Outdoor unit			AOEG18KATA	AOEG22KATA	AOEG24KATA	AOEG30KATA	AOEG36KATA	AOEG45KATA	AOEG36KQTA	AOEG45KQTA	
Power Source				Single phase, ~230 V, 50 Hz							3-phase, ~400 V, 50 Hz	
Capacity	Cooling	Rated	kW	5.2	6.0	6.8	8.5	9.5	12.1	9.5	12.1	
		Min.-Max.		0.9-5.4	0.9-6.3	0.9-7.4	2.8-9.6	2.8-10.6	4.0-12.6	2.8-10.6	4.0-12.6	
	Heating	Rated		6.0	7.0	7.5	10.0	10.8	13.5	10.8	13.5	
		Min.-Max.		0.9-6.3	0.9-7.4	0.9-8.6	2.7-10.8	2.7-12.5	4.2-15.0	2.7-12.5	4.2-15.0	
Input Power		Cooling/Heating	kW	1.66/1.71	1.95/2.09	2.19/2.00	2.78/2.86	3.13/3.03	4.84/4.18	3.13/3.03	4.84/4.18	
EER		Cooling	W/W	3.13	3.08	3.11	3.06	3.04	2.50	3.04	2.50	
COP		Heating		3.51	3.35	3.75	3.5	3.56	3.23	3.56	3.23	
Pdesign		Cooling/Heating (-10°C)	kW	5.2/3.8	6.0/4.4	6.8/5.4	8.5/8.0	9.5/8.7	12.1/9.2	9.5/8.7	12.1/9.2	
SEER		Cooling	W/W	5.8	5.6	6.0	5.8	5.6	5.20	5.6	5.20	
SCOP		Heating		3.8	3.8	3.9	3.9	3.9	3.80	3.9	3.80	
Energy Efficiency Class		Cooling	A+	A+	A+	A+	A+	A+	-	A+	-	
		Heating	A	A	A	A	A	A	-	A	-	
nc			%	-	-	-	-	-	205.0	-	205.0	
nh				-	-	-	-	-	149.0	-	149.0	
Max. Operating Current		Cooling/Heating	A	10.1/10.1	11.6/11.6	12.6/12.6	22.5/22.5	22.5/22.5	28.1/28.1	10.5/10.5	13.6/13.6	
Annual Energy Consumption		Cooling	kWh/a	538	375	679	512	594	-	594	-	
		Heating		1,398	1,618	1,935	2,871	3,117	-	3,117	-	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	dB(A)	38/36/33/31	42/37/34/31	41/36/32/29	45/40/35/32	44/40/37/32	45/41/39/34	44/40/37/32	45/41/39/34	
	Indoor (Heating)	H/M/L/Q		38/36/33/31	42/37/34/31	41/36/32/29	45/40/35/32	44/40/37/32	45/41/39/34	44/40/37/32	45/41/39/34	
Sound Power Level	Outdoor (Cooling/Heating)	High		51/52	52/53	54/55	53/55	55/55	58/59	55/55	58/59	
	Indoor (Cooling/Heating)	High		53/53	57/57	56/56	60/60	59/59	60/60	59/59	60/60	
Airflow Rate	Outdoor (Cooling/Heating)	High	m³/h	63/64	64/65	66/67	68/69	70/70	72/73	70/70	72/73	
	Indoor/Outdoor (Cooling)	High		840/1,710	900/2,240	1,230/2,885	1,400/3,750	1,850/3,750	1,900/4,450	1,850/3,750	1,900/4,450	
		Indoor/Outdoor (Heating)		High	840/1,840	900/2,240	1,230/2,350	1,400/3,750	1,800/3,750	1,850/4,450	1,800/3,750	1,850/4,450
Net Dimensions		Indoor		mm	235 × 1,080 × 705	235 × 1,080 × 705	235 × 1,390 × 705	235 × 1,390 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705	235 × 1,700 × 705
H x W x D		Outdoor	mm	542 × 799 × 290	632 × 799 × 290	632 × 799 × 290	788 × 940 × 320	788 × 940 × 320	988 × 940 × 320	788 × 940 × 320	998 × 940 × 320	
Weight		Indoor/Outdoor	kg	24/33	24/36	31/38	31/52	38/52	38/61	38/53	38/62	
Connection Pipe Diameter (Liquid/Gas)			mm	6.35/12.7	6.35/12.7	6.35/12.7	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	
Max. Pipe Length (Pre-Charge)			m	20 (15)	25 (15)	25 (20)	30 (30)	30 (30)	30 (30)	30 (30)	30 (30)	
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	
Refrigerant		Type (Global Warming Potential)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	

Feature Summary

Type		Wall-mounted type		
Series		Designer Range		Standard Range
				
Model name		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTE	ASEG07/09/12/14KETF ASEG07/09/12/14KETF-B, ASYG07/09/12/14KETE ASYG07/09/12/14KETE-B	ASEH07/09/12/14KMCG, ASEH07/09/12/14KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE
				
Energy-Saving Features	 Save Human sensor	●		
	 Human sensor control			
	 Economy operation	●	●	●
	 Setting temperature range limitation	○	○	○
	 Set temperature auto return	○	○	○
Features for Comfort	 Power diffuser			
	 Powerful operation	●	●	●
	 10°C Heat	●	●	●
	 Outdoor unit low noise operation	●	●	●
	 Auto changeover	●	●	●
	 UP/DOWN swing louver	●	●	●
	 Double swing automatic			
	 Automatic fan speed	●	●	●
	 Auto restart	●	●	●
	 Connectable fresh air duct			
	 Fresh air intake			
	 Connectable distributing duct			
	 Individual airflow direction control			
	 Auto-off timer	○	○	○
	 Sleep timer	●	●	●
Convenience Features	 Program timer	●	●	●
	 Weekly timer	●	●	○
	 Weekly & Temperature setback timer	○	○	○
	 Filter sign	●	●	●
	 External error output	○	○	○
	 External ON/OFF input	○	○	○
	 Wireless LAN control	● (KGTG, KGTE) ○ (KGTE)	● (KETF, KETF-B) ○ (KETE, KETE-B)	● (KMCF, KMCG, KMCG-B) ○ (KMCE)
	 Multi system control			
	 Special cooling			
Clean Features	 Ion deodorization filter	●	●	●
	 Apple-catechin filter	●	●	●
	 Long-life filter			
	 Washable panel	●	●	●
	 Silver Ion Filter	○	○	○
Installation / Support	 Automatic airflow adjustment			
	 Drain pump as standard			
	 Blue fin			
	 Refrigerant cycle monitor	○ (KGTG)		○ (KMCG, KMCG-B)

*1 For details of Multi System Control function, refer to C-013. *2 Wired remote controller (UTY-RNRYZ5) is required to use Special Cooling function.

Wall-mounted type					
Standard Range		ECO Range			
					
ASEG18/24KMTE	ASEH30/36KMTB	ASEH07/09/12KNCA	ASEG07/09/12KPCE	ASEG18/24KLCA	ASEH07/09/12KLTA
					
	●				
●	●	●	●	●	●
○	○	○	○	○	○
○	○				
●	●	●	●	●	●
●	●	●			
●	●				
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
○	○				
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●*3			
○	○				
●	●	●	●	●	●
○	○				
○	○				
○	○	●	○		○
	○				
	●*2				
●	●				
●	●				
●	●	●	●	●	●
○	○	○	○	○	○
	●	●			●
	○				

*3: It is only available on the AIRSTAGE Mobile application and wired remote controller. It can not be used via wireless remote controller.

○ : Optional function

Feature Summary

Type		Cassette		Duct	
Series		Compact 4-way Flow Series	Circular Flow Series	Slim (With drain pump)	Medium Static Pressure (High-Efficiency & Comfort)
					
Model name		AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXH 12/14/18/22/24/ 30/36/45/54 KMTAP
					
Energy-Saving Features	 Save Human sensor				
	 Human sensor control		○		
	 Economy operation	●	●	●	○
	 Setting temperature range limitation	○	●	○	○
	 Set temperature auto return	●	●	●	○
Features for Comfort	 Power diffuser				
	 Powerful operation				
	 10°C Heat	●	○	○	○
	 Outdoor unit low noise operation		○ (45/54)		○ (45/54)
	 Auto changeover	●	●	●	●
	 UP/DOWN swing louver	●	●	○	
	 Double swing automatic				
	 Automatic fan speed	●	●	●	●
	 Auto restart	●	●	●	●
	 Connectable fresh air duct		●		●
	 Fresh air intake	○	○	○	○
	 Connectable distributing duct		●		
	 Individual airflow direction control		●		
Convenience Features	 Auto-off timer	●	●	●	●
	 Sleep timer	●	○	○	○
	 Program timer	●	○	○	○
	 Weekly timer	●	●	●	○
	 Weekly & Temperature setback timer	○		●	
	 Filter sign	●	●	●	●
	 External error output		○		○
	 External ON/OFF input	●	●	●	●
	 Wireless LAN control	○	○	○	○
	 Multi system control				
Clean Features	 Special cooling				
	 Ion deodorization filter				
	 Apple-catechin filter				
	 Long-life filter			○	○
	 Washable panel				
Installation / Support	 Silver Ion Filter	○	○	○	○
	 Automatic airflow adjustment			●	●
	 Drain pump as standard	●	●	●	●
	 Blue fin		● (30/36/45/54)	● (30/36/45/54)	● (30/36/45/54)
	 Refrigerant cycle monitor			○	

*1 For details of Multi System Control function, refer to C-013. *2 Wired remote controller (UTY-RNRYZ5) is required to use Special Cooling function.

○ : Optional function



Light Commercial & Residential

MULTI-SPLIT

- M-002 Multi-split Overview
- M-004 Multi-split Outdoor Units Lineup
- M-006 2-unit to 5-unit Multi-split Connectable Indoor Units
- M-008 6-unit Multi-split Connectable Indoor Units
- M-010 Simultaneous Multi-split Connectable Indoor Units
- M-050 Feature Summary




Refrigerant type R32 models

- M-012 2-unit to 5-unit Multi-split
 - M-018 Simultaneous Multi-split Twin/Triple
-
- M-022 2-unit to 5-unit Multi-split Indoor Units Specifications
-
- M-028 2-unit to 5-unit Multi-split Combination Table



Refrigerant type R410A models

- M-016 6-unit Multi-split
 - M-020 Simultaneous Multi-split Twin/Triple/Double Twin
-
- M-026 6-unit Multi-split Indoor Units Specifications
-
- M-044 6-unit Multi-split Combination Table

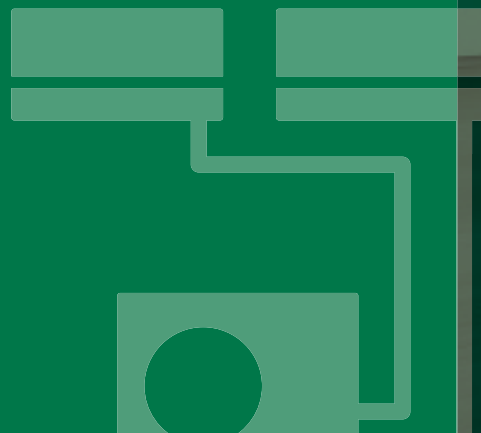



A single outdoor unit drives multiple indoor units, offering greater flexibility in system configuration.

If you wish to keep an entire floor or two or more rooms comfortable, we recommend you choose a multi-split air conditioning system with a single outdoor unit. Choose one that meets your air conditioning requirements from the variety of models we offer. You can mix and match indoor and outdoor units as you wish to build the system that best suits your needs.



Multi-split Overview

Multi-split's space-saving outdoor unit allows for connections of up to eight indoor units for multiple rooms. Added to the lineup are models compatible with the new R32 refrigerant, offering environmentally friendly comfort in homes, offices, stores, and various other settings.



3-unit, 4-unit, 5-unit Multi-split Types



3-unit 18/24 class

4-unit 30 class
5-unit 36 class

2-unit Multi-split



14 class



18 class

2-unit to 6-unit Multi-split

Recommended for residences, offices, and other situations where multiple rooms require air conditioning. Each of the 2 to 6 connected indoor units can also be operated individually. Operation control, time scheduling for each room, and energy-saving options can be set on both individual and central remote controllers. The outdoor unit is designed to save space and is flexible enough to be installed on a balcony or underneath a waist-high window.

6-unit Multi-split



6-unit 45 class

Twin / Triple

Twin 36 class
(Single-phase/3-phase)Twin/Triple 45/54 class
(Single-phase/3-phase)

Twin / Triple / Double Twin





72/90 class
(3-phase)

Simultaneous Multi-split Type

Suitable for a small building, the entrance hall of a small office, meeting rooms, educational facilities, and other roomy areas where multiple indoor units need to be operated simultaneously. Up to 4 indoor units can be operated simultaneously, making the system perfect for air conditioning not only offices with large spaces, but also spaces with atypical layouts.



Multi-split Outdoor Units Lineup

			Class	14	18
			Cooling rated capacity (kW)	4.0	5.0
2-unit, 3-unit, 4-unit, 5-unit Multi-split	2-unit Multi-split Up to 2 units			AOEG14KBCA2	AOEG18KBCA2
	3-unit Multi-split Up to 3 units				
	4-unit Multi-split Up to 4 units				
	5-unit Multi-split Up to 5 units				
6-unit Multi-split	6-unit Multi-split Up to 6 units				
Simultaneous Multi-split	Twin Single-phase				
	Twin 3-phase				
	Twin/Triple Single-phase				
	Twin/Triple 3-phase				
	Twin/Triple/ Double Twin 3-phase				

Notes:

1. 2-unit Multi-split:

Connectable indoor units are 2 units.
AOEG14KBT2: Total capacity of indoor units connected must be between 3.0 kW and 6.0 kW.
AOEG18KBT2: Total capacity of indoor units connected must be between 3.0 kW and 7.5 kW.

2. 3-unit Multi-split:

Connectable indoor units are 2 to 3 units.
AOEG18KBT3: Total capacity of indoor units connected must be between 4.0 kW and 8.5 kW.
AOEG24KBT3: Total capacity of indoor units connected must be between 4.0 kW and 10.5 kW.

3. 4-unit Multi-split:

Connectable indoor units are 2 to 4 units.
AOEG30KBT4: Total capacity of indoor units connected must be between 7.5 kW and 14.0 kW.

4. 5-unit Multi-split:

Connectable indoor units are 2 to 5 units
AOEG36KBT5: Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.



FUJITSU GENERAL (Euro) GmbH participates in the ECP program for AC. Check ongoing validity of certificate: www.eurovent-certification.com
*Models so marked are not ECC certified.

18 5.4	24 6.8	30 8.0	36 10.0	45 12.5 14.0		54 14.0	72 19.0	90 22.0
AOEG18KBCA3	AOEG24KBCA3							
		AOEG30KBTA4						
			AOEG36KBTA5*1					
				AOYG45LBLA6*				
			AOEG36KBTB	AOEG45KBTB				
			AOEG36KRTA	AOEG45KRTA				
						AOEG54KBTB		
						AOEG54KRTA		
							AOYG72LRLA	AOYG90LRLA

MULTI-SPLIT

5. 6-unit Multi-split:

Connectable indoor units are 2 to 6 units

AOYG45LBLA6: Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.

*For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1

Cooling rated capacity: *1: 9.5 kW



2-unit to 5-unit Multi-split Connectable Indoor Units



Type	2-unit		3-unit		4-unit	5-unit
Model name	AOEG14KBCA2	AOEG18KBCA2	AOEG18KBCA3	AOEG24KBCA3	AOEG30KBT4	AOEG36KBT45
Multi-split Type Outdoor Unit						
Capacity (kW)	Cooling	4.0	5.0	5.4	6.8	8.0
	Heating	4.4	5.6	6.8	8.0	9.6

Indoor Unit	BTU	kW Class						
 ASEH07/09/12/14KGTG ASYG07/09/12/14KGTG	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
 ASEG07/09/12/14KETF ASYG07/09/12/14KETE	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
 ASEH07/09/12/14KMCG ASYG07/09/12/14KMCF	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
 ASEH05/07/09/12KNCA	5,000	1.5	●*	●*	●*	●*	●*	●*
	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
 ASEG18/22/24KMTE	18,000	5.0	—	—	—	●	●	●
	22,000	6.0	—	—	—	—	●	●
	24,000	7.0	—	—	—	—	●	●
 ASEG09/12/14KVCA	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
 AUXG07/09/12/14/18/22KVLA	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
	22,000	6.0	—	—	—	—	●	●

*For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1



Type	2-unit		3-unit		4-unit	5-unit
Model name	AOEG14KBCA2	AOEG18KBCA2	AOEG18KBCA3	AOEG24KBCA3	AOEG30KBT4	AOEG36KBT5
Multi-split Type Outdoor Unit						
Capacity (kW)	Cooling	4.0	5.0	5.4	6.8	8.0
	Heating	4.4	5.6	6.8	8.0	9.6

Indoor Unit	BTU	kW Class						
 ARXG07/09/12/14/18KSLAP	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
 ARXG07/09/12/14/18KLLAP	7,000	2.0	●	●	●	●	●	●
	9,000	2.5	●	●	●	●	●	●
	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
 ARXH12/14/18/22KMTAP	12,000	3.5	●	●	●	●	●	●
	14,000	4.0	—	●	●	●	●	●
	18,000	5.0	—	—	—	●	●	●
	22,000	6.0	—	—	—	—	●	●
 ARXG22KMLB	22,000	6.0	—	—	—	—	●	●
 ABEG18/22KRTA	18,000	5.0	—	—	—	●	●	●
	22,000	6.0	—	—	—	—	●	●



6-unit Multi-split Connectable Indoor Units



Type	6-unit	
Model name	AOYG45LBLA6	
Multi-split Type Outdoor Unit		
Capacity (kW)	Cooling	12.5
	Heating	13.5

Indoor Unit	BTU	kW Class	
 ASYG07/09/12/14LMCE	7,000	2.0	●
	9,000	2.5	●
	12,000	3.5	●
	14,000	4.0	●
 ASYG07/09/12/14LUCA	18,000	5.0	●
	24,000	7.0	●
 ASYG18/24LF	9,000	2.5	●
	12,000	3.5	●
	14,000	4.0	●
 AGYG09/12/14LV	7,000	2.0	●
	9,000	2.5	●
	12,000	3.5	●
	14,000	4.0	●
	18,000	5.0	●
 AUYG07/09/12/14/18LV	7,000	2.0	●
	9,000	2.5	●
	12,000	3.5	●
	14,000	4.0	●
	18,000	5.0	●
 ABYG14LVTA ABYG18LVTB	14,000	4.0	●
	18,000	5.0	●
 ARYG07/09/12/14/18SLAP	7,000	2.0	●
	9,000	2.5	●
	12,000	3.5	●
	14,000	4.0	●
	18,000	5.0	●
 ARYG07/09/12/14/18LL	7,000	2.0	●
	9,000	2.5	●
	12,000	3.5	●
	14,000	4.0	●
	18,000	5.0	●





Simultaneous Multi-split Connectable Indoor Units



Type	4HP		5HP		6HP	
Model name	AOEG36KBTB	AOEG36KRTA	AOEG45KBTB	AOEG45KRTA	AOEG54KBTB	AOEG54KRTA
Simultaneous Multi-split Type Outdoor Unit						
Capacity (kW)	Cooling	9.5	12.1	13.4	13.4	13.4
	Heating	10.8	13.5	15.5	15.5	15.5

Indoor Unit	BTU	kW Class	Twin			Triple
 AUXG18/22/24KVLA	18,000	5.0	● × 2	—	—	● × 3
	22,000	6.5	—	● × 2	—	—
	24,000	7.0	—	—	● × 2	—
 ARXG18KLLAP	18,000	5.0	● × 2	—	—	● × 3
 ARXG22KMLB ARXG24KMLA	22,000	6.5	—	● × 2	—	—
	24,000	7.0	—	—	● × 2	—
Separation tube			UTP-SX236A (18/22/24)			UTP-SX354A (18)

Note : Please be aware that 2-wired group control is not possible with Simultaneous Multi-split.
The WLAN modules from Airstage Mobile are not compatible with Simultaneous Multi



Type	8HP		10HP	
Model name	AOYG72LRLA		AOYG90LRLA	
Simultaneous Multi-split Outdoor Unit				
Capacity (kW)	Cooling	19.0	Cooling	22.0
	Heating	22.4	Heating	27.0

Indoor Unit	BTU	kW Class	Twin	Triple	Double Twin	Twin	Triple	Double Twin
 AUYG18/22/24LV	18,000	5.0	—	—	● × 4	—	—	—
	22,000	6.5	—	—	—	—	—	● × 4
	24,000	7.0	—	● × 3	—	—	—	—
 AUYG30/36/45LR	30,000	8.8	—	—	—	—	● × 3	—
	36,000	10.6	● × 2	—	—	—	—	—
	45,000	12.5	—	—	—	● × 2	—	—
 ARYG18LLTB	18,000	5.0	—	—	● × 4	—	—	—
 ARYG22/24/30/36/45LM	22,000	6.5	—	—	—	—	—	● × 4
	24,000	7.0	—	● × 3	—	—	—	—
	30,000	8.8	—	—	—	—	● × 3	—
	36,000	10.6	● × 2	—	—	—	—	—
	45,000	12.5	—	—	—	● × 2	—	—
 ABYG/18/22/24LV	18,000	5.0	—	—	● × 4	—	—	—
	22,000	6.5	—	—	—	—	—	● × 4
	24,000	7.0	—	● × 3	—	—	—	—
 ABYG30/36/45LR	30,000	8.8	—	—	—	—	● × 3	—
	36,000	10.6	● × 2	—	—	—	—	—
	45,000	12.5	—	—	—	● × 2	—	—
Separation tube			UTP-SX272A × 1	UTP-SX372A × 1	UTP-SX272A × 1, UTP-SX236A × 2	UTP-SX272A × 1	UTP-SX372A × 1	UTP-SX272A × 1, UTP-SX254A × 2


MULTI-SPLIT

2-unit,
3-unit,
4-unit,
5-unit,
Multi-split




High energy saving

With the adoption of a high-efficiency DC twin-rotary compressor, all models achieved an energy efficiency scale of A+++ for cooling and A++ for heating.



SEER 8.7* SCOP 4.7

*: 2-units 14 class when connected with a wall mounted [KG/KM] unit.

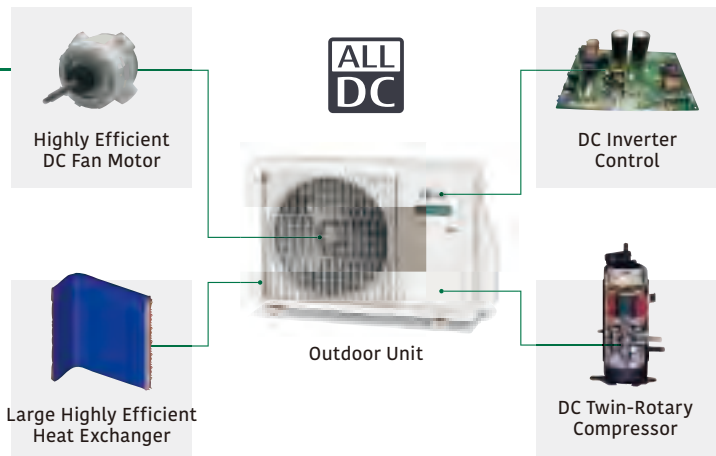

R32 refrigerant model

In addition to its high energy efficiency, the R32 refrigerant has a larger volumetric capacity than the R410A refrigerant, which means the R32 refrigerant models require less refrigerant charge than the R410A models.

	Pre-charge refrigerant amount (kg)	
	R32	R410A
2-unit 14 class	0.9	1.25
2-unit 18 class	1.02	1.30
3-unit 18 class	1.8	2.2
3-unit 24 class	1.8	2.2
4-unit 30 class	2.2	3.3
5-unit 36 class	2.5	4.0

Quiet operation

The sound power level is reduced by up to 7 dB compared to the current R410 models.

Sound Power Level

*3-unit 24 class (cooling)

61 dB(A)

68 dB(A)



R32 model

-7 dB(A)



R410 model

Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit by long piping as well. Unlike a single type, the outdoor unit can be installed in the most space-saving location.



Compact design

Unlike a single type, the outdoor unit can be installed in the most space-saving location.

R410A model



R32 model



Depth difference

-15.5 %!*


Space requirement

-36.2 %!*

*: Compared with current 5-unit multi models

Easy evacuation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.

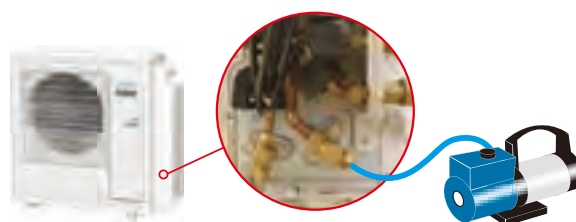

Wide range of indoor units with various models

We offer 41 models in 5 types in a capacity range from 2.0 kW to 6.0 kW. Wide range of requirements can be realized from private homes through to large shops and hotels



Models equipped with the New R32 Refrigerant

Wall-mounted type with sophisticated design

Designer series



Cool Beauty Design
07/09/12/14 kBTU




High Spec & Design
07/09/12/14 kBTU

Standard series



High Efficiency & Comfort
07/09/12/14 kBTU



Compact Size
05/07/09/12 kBTU



High Efficiency & Large Rooms
18/22/24 kBTU

Middle and small capacity models are available. This makes installation easier in small spaces.



Mini Duct

07/09/12/14/18 kBTU



Slim Duct

07/09/12/14/18 kBTU



Medium static pressure duct

12/14/18/22 kBTU



22 kBTU



Compact Cassette

07/09/12/14/18/22 kBTU



Floor

09/12/14/ kBTU



Ceiling

18/22 kBTU



MULTI-SPLIT

2-unit: A0EG14KBCA2 / A0EG18KBCA2

3-unit: A0EG18KBCA3 / A0EG24KBCA3

4-unit: A0EG30KBTA4

5-unit: A0EG36KBTA5



2-unit



3-unit



4-unit, 5-unit

Specifications (2-unit)

Model name				A0EG14KBCA2	A0EG18KBCA2
Power Source				Single phase, ~230 V, 50 Hz	
Rated Capacity	Cooling	Rated Min.-Max.	kW	4.0	5.0
		Rated		1.4-4.6	1.7-5.8
	Heating	Rated Min.-Max.		4.4	5.6
EER	Cooling		W/W	1.1-5.5	1.8-6.6
COP	Heating			4.12	4.03
Sound Pressure Level (High)	Cooling		dB(A)	4.63	4.59
Sound Power Level (High)	Heating			47	47
	Cooling			49	50
	Heating			60	60
Airflow Rate	Cooling/Heating	m ³ /h		62	62
Net Dimensions H × W × D		mm		1,670/1,670	1,960/2,020
Weight		kg		542 × 799 × 290	632 × 799 × 290
Connection Pipe Diameter	Liquid	mm		33	37
	Gas			6.35 × 2	6.35 × 2
Max. Pipe Length	Total/Each			9.52 × 2	9.52 × 2
				30/20	30/20
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit	m		15	15
	Between Indoor Units			10	10
Operating Range	Cooling	°CDB		-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)		0.9 (0.608)	1.02 (0.689)

Specifications (3-unit)

Model name				A0EG18KBCA3	A0EG24KBCA3
Power Source				Single phase, ~230 V, 50 Hz	
Rated Capacity	Cooling	Rated Min.-Max.	kW	5.4	6.8
		Rated		1.8-7.0	1.8-8.5
	Heating	Rated Min.-Max.		6.8	8.0
EER	Cooling		W/W	2.0-8.0	2.0-9.2
COP	Heating			4.78	3.90
Sound Pressure Level (High)	Cooling		dB(A)	4.89	4.40
Sound Power Level (High)	Heating			46	48
	Cooling			49	53
	Heating			59	61
Airflow Rate	Cooling/Heating	m ³ /h		61	67
Net Dimensions H × W × D		mm		2,220/2,160	2,270/2,730
Weight		kg		716 × 820 × 315	716 × 820 × 315
Connection Pipe Diameter	Liquid	mm		46	46
	Gas			6.35 × 3	6.35 × 3
Max. Pipe Length	Total/Each			9.52 × 3	9.52 × 2, 12.70 × 1 adapter [12.70 → 9.52] × 1
				50/25	50/25
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit	m		15	15
	Between Indoor Units			10	10
Operating Range	Cooling	°CDB		-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)		1.8 (1.215)	1.8 (1.215)

Specifications (4-unit, 5-unit)


Model name				A0EG30KBTA4	A0EG36KBTA5
Power Source				Single phase, ~230 V, 50 Hz	
Rated Capacity	Cooling	Rated Min.-Max.	kW	8.0	9.5
		Rated		2.4-10.1	3.0-11.0
	Heating	Rated Min.-Max.		9.6	10.6
EER	Cooling		W/W	3.0-11.2	3.5-12.0
COP	Heating			3.90	3.80
Sound Pressure Level (High)	Cooling		dB(A)	4.55	4.50
Sound Power Level (High)	Heating			50	52
	Cooling			54	55
	Heating			63	65
Airflow Rate	Cooling/Heating	m ³ /h		66	68
Net Dimensions H × W × D		mm		2,400/2,950	2,450/2,900
Weight		kg		884 × 820 × 315	884 × 820 × 315
Connection Pipe Diameter	Liquid	mm		55	59
	Gas			6.35 × 4	6.35 × 5
Max. Pipe Length*	Total/Each			9.52 × 2, 12.70 × 2 adapter [12.70 → 9.52] × 2	9.52 × 3, 12.70 × 2 adapter [12.70 → 9.52] × 2 adapter [9.52 → 12.70] × 1
				70/25	75/25
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit	m		15	15
	Between Indoor Units			10	10
Operating Range	Cooling	°CDB		-10 to 46	-10 to 46
	Heating			-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)			R32 (675)	R32 (675)
	Charge	kg (CO ₂ eq-T)		2.2 (1.485)	2.5 (1.688)

*Length not applicable when floor units are connected. For details, refer to the installation manual.


Dimensions

(Unit: mm)


2-unit: A0EG14KBCA2

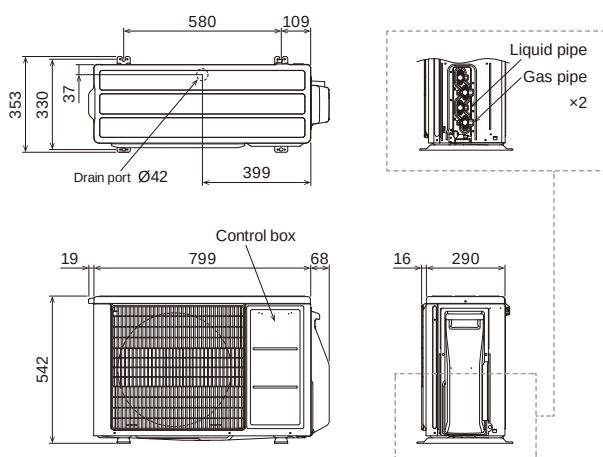


2-unit: A0EG18KBCA2

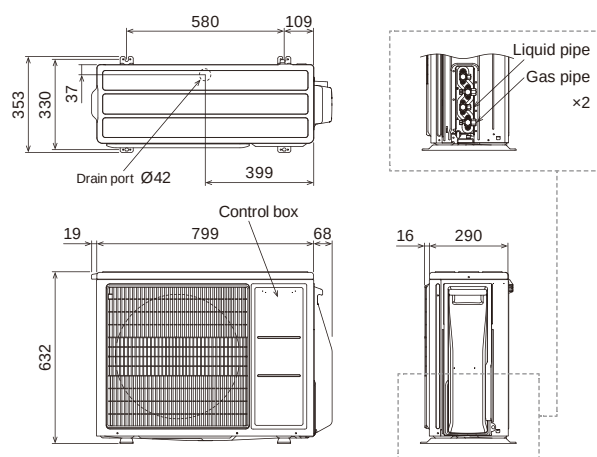

3-unit: A0EG18KBCA3 / A0EG24KBCA3

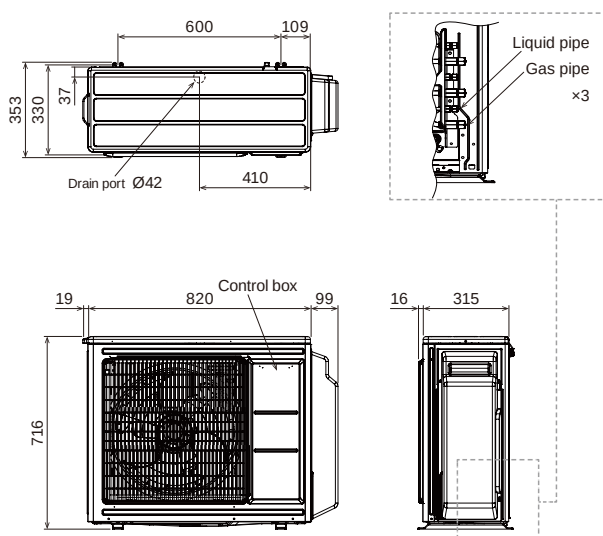

4-unit: A0EG30KBTA4 5-unit: A0EG36KBTA5

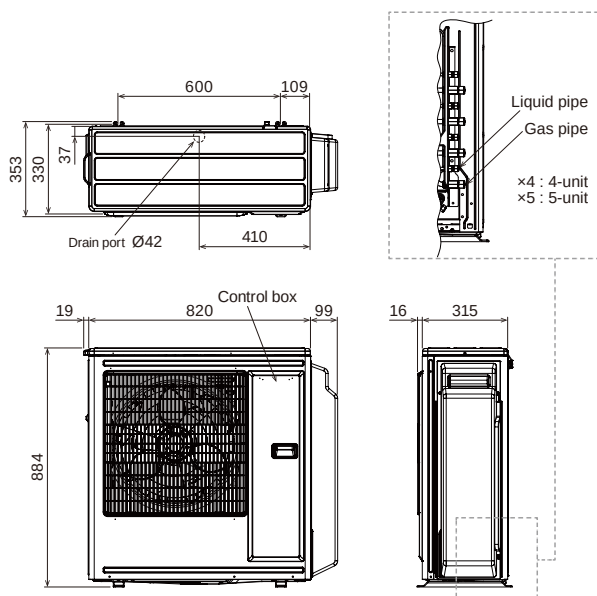


MULTI-SPLIT

6-unit Multi-split



A wide variety of models to choose from

We offer 26 models in 5 types in a capacity range from 2.0 kW to 7.0 kW. Wide range of requirements can be realized from private homes through to large shops and hotels.

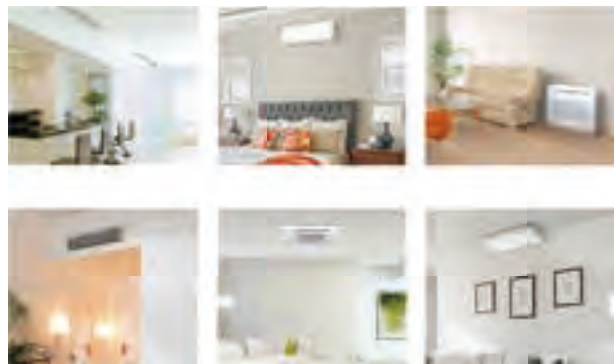

Compact design

Multiple indoor units can be connected to 1 outdoor unit by long piping as well. Unlike a single type, the outdoor unit can be installed in the most space-saving location.



Easy installation

All connected pipes and indoor units can be evacuated quickly via our centralized valve method. Requires evacuation only once.



Central & Individual control

- Batched control of up to 6 indoor units. Unified setting of room temperature, airflow volume, and local control restrictions across units.
- Language can be selected from English, French, German, Greek, Italian, Portuguese, Russian, Spanish, or Turkish.
- Large backlit LED screen
- Large easy-to-see operation panel

Max. Controllable
1 multi-system
Max. Controllable
6 indoor units



6-unit: AOYG45LBLA6







Specifications

Model name				AOYG45LBLA6	
Power Source				Single phase, ~230 V, 50 Hz	
Rated Capacity	Cooling	Rated	kW	12.5	
		Min.-Max.		3.5-14.0	
	Heating	Rated		13.5	
		Min.-Max.		3.5-16.0	
EER	Cooling		W/W	3.50	
COP	Heating			4.00	
Sound Pressure Level (High)	Cooling		dB(A)	53	
	Heating			55	
Sound Power Level (High)	Cooling			-	
	Heating			-	
Airflow Rate	Cooling/Heating		m³/h	4,200/4,200	
Net Dimensions H × W × D			mm	998 × 970 × 370	
Weight			kg	94	
Connection Pipe Diameter	Liquid		mm	6.35 × 6	
	Gas			9.52 × 4, 12.70 × 2	
Max. Pipe Length	Total/Each			80/25	
Max. Height Difference	Between Outdoor Unit and Each Indoor Unit.		m	15	
	Between Indoor Units.			10	
Operating Range	Cooling		°CDB	-10 to 46	
	Heating			-15 to 24	
Refrigerant	Type (Global Warming Potential)			R410A (2,088)	
	Charge		kg (CO2eq-T)	4.00 (8.352)	

Dimensions

(Unit: mm)

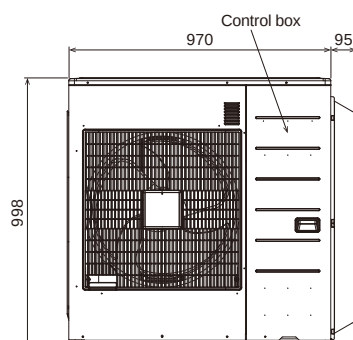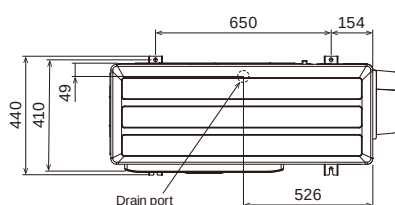

MULTI-SPLIT

Simultaneous Multi-split Type


Twin / Triple




Meets a variety of installation needs from offices to commercial spaces, with up to 3 indoor units in the same room connected to an outdoor unit.

Select indoor units according to floor layout and heat load estimated by the number of people working in the room and the direction and intensity of sunlight entering the room. Perfect airflow distribution can be achieved for optimum comfort.

Installation according to floor layout




Installation according to lighting conditions



Design flexibility

Slim & Compact Design

The outdoor unit in this series is 22.7% shorter* than a twin-fan outdoor unit. The reduced height makes it easy to install in tight spaces.



R410A model




R32 model

Height
-22.7%*

(*: Applicable to the 45,000- and 54,000-BTU models)

Flexible installation

Pipe length of up to 50 m and a height difference of up to 30 m can be accommodated. Multi-split systems can be installed in large residences and multi-story buildings.

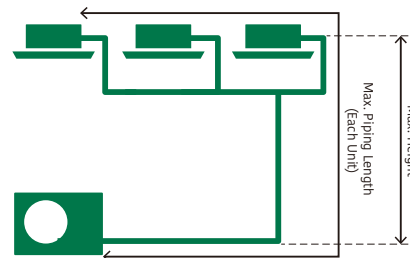

Max. Pipe Length (Each Unit):

50 m

Max. Height:

30 m

New lineup of indoor units

The indoor units, available in 6 models of 3 types, can be selected according to room size and conditions.



Compact Cassette



Slim Duct



Duct

Note : Please be aware that 2-wired group control is not possible with Simultaneous Multi-split.



KRTA [3-phase]



The image shows two views of the KRTA 3-phase outdoor unit. The left view shows the front of the unit with a large circular fan grille. The right view shows the side of the unit, highlighting the condenser coils and the refrigerant service ports.

45/54





Indoor Units Model name				Compact Cassette		
				AUXG18KVLA	AUXG22KVLA	AUXG24KVLA
Power Source				Single phase, ~230 V, 50 Hz		
Airflow Rate	Cooling	H/M/L/Q	m³/h	680/580/490/410	830/740/600/450	930/830/600/450
	Heating	H/M/L/Q		800/680/580/450	860/760/700/530	930/850/700/530
Net Dimensions H × W × D			mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight			kg	15	16	16
Cassette Grille				UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W

Indoor Units Model name				Duct		
				ARXG18KLLAP	ARXG22KMLB	ARXG24KMLA
Power Source				Single phase, ~230 V, 50 Hz		
Airflow Rate	Cooling	H/M/L/Q	m³/h	940/880/820/750	1,100/910/750/580	1,100/910/750/580
	Heating	H/M/L/Q		940/880/820/750	1,100/910/750/580	1,100/910/750/580
Net Dimensions H × W × D			mm	198 × 900 × 620	270 × 1,135 × 700	270 × 1,135 × 700
Weight			kg	20	35	35

Outdoor Units Model name			AOEG36KBTB	AOEG45KBTB	AOEG54KBTB	AOEG36KRTA	AOEG45KRTA	AOEG54KRTA
Capacity	Cooling	kW	9.5	12.1	13.4	9.5	12.1	13.4
	Heating		10.8	13.5	15.5	10.8	13.5	15.5
Power Source			Single phase, ~230 V, 50 Hz			3-phase, ~400 V, 50 Hz		
Pdesign	Cooling	kW	9.5	—	—	9.5	—	—
	Heating (≤10°C)		8.7	—	—	8.7	—	—
SEER	Cooling	W/W	6.10	—	—	6.10	—	—
SCOP	Heating		4.00	—	—	4.00	—	—
Annual Energy Consumption	Cooling	kWh/a	545	—	—	545	—	—
	Heating		3,044	—	—	3,044	—	—
Energy Efficiency Class	Cooling		A++	—	—	A++	—	—
	Heating		A+	—	—	A+	—	—
Sound Pressure Level (High)	Cooling	dB(A)	55	57	57	55	57	57
	Heating		55	57	59	55	57	59
Sound Power Level (High)	Cooling		70	71	73	70	71	73
	Heating	70	71	73	70	71	73	
Airflow Rate	Cooling/Heating	m³/h	3,750/3,750	4,450/4,450	4,450/4,450	3,750/3,750	4,450/4,450	4,450/4,450
Net Dimensions H × W × D		mm	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320	788 × 940 × 320	998 × 940 × 320	998 × 940 × 320
Weight		kg	52	67	67	53	67	67
Connection Pipe Diameter (Liquid/Gas)		mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Max. Pipe Length (Pre-Charge)		m	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)	50 (30)
Max. Height Difference			30	30	30	30	30	30
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)	1.90 (1.283)	2.70 (1.823)	2.70 (1.823)
Separation tube			UTP-SX236A (Twin)	UTP-SX236A (Twin)	UTP-SX236A (Twin) UTP-SX354A (Triple)	UTP-SX236A (Twin)	UTP-SX236A (Twin)	UTP-SX236A (Twin) UTP-SX354A (Triple)

- ## Dimensions

AOEG36KBTB / AOEG36KRTA



MULTI-SPLIT

Simultaneous Multi-split Type

Twin / Triple / Double Twin




Meets a variety of installation needs from an open-plan office to a retail store, with up to 4 indoor units connected to an outdoor unit.

Select indoor units according to floor layout and heat load estimated by the number of people working in the room and the direction and intensity of sunlight entering the room. Perfect airflow distribution can be achieved for optimum comfort.

Installation according to floor layout




Installation according to lighting conditions



Installation according to layout and lighting conditions




Installation according to large space



Simultaneous control

Up to 16 indoor units can be controlled simultaneously with a wired remote controller.

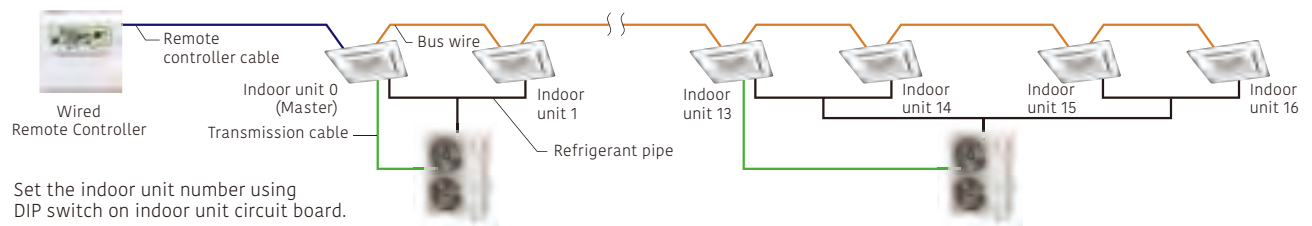

Set the indoor unit number using DIP switch on indoor unit circuit board.

*The following functions are not provided by a wireless remote controller: Timer operation, Sleep Timer operation, 10°C Heat operation

Indoor unit lineup

The indoor units, available in 18 models of 6 types, can be selected according to room size and conditions.



Compact Cassette



Cassette



Slim Duct



Duct



Floor/Ceiling Universal



Ceiling



Model: AOYG72LRLA [3-phase] / AOYG90LRLA [3-phase]



Specifications (Indoor units/Outdoor units)

Indoor Units Model name				Compact Cassette, Cassette					
				AUYG18LVLB	AUYG22LVLA	AUYG24LVLA	AUYG30LRLE	AUYG36LRLE	AUYG45LRLA
Power Source				Single phase, ~230 V, 50 Hz					
Airflow Rate	Cooling	H/M/L/Q	m³/h	750/610/520/410	930/830/600/450	930/830/600/450	1,600/1,400/1,270/1,150	1,800/1,400/1,270/1,150	1,900/1,640/1,460/1,250
	Heating	H/M/L/Q		800/710/600/450	930/860/700/530	930/830/600/450	1,800/1,400/1,270/1,150	1,800/1,400/1,270/1,150	1,900/1,640/1,460/1,250
Net Dimensions H × W × D				245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	288 × 840 × 840	288 × 840 × 840	288 × 840 × 840
Weight				15	16	16	26	26	26
Cassette Grille				UTG-UEYD-W			UTG-UEYD-W		

Indoor Units Model name				Duct						
				ARYG18LLTB	ARYG22LMLA	ARYG24LMLA	ARYG30LMLE	ARYG36LMLE	ARYG45LMLA	
Power Source				Single phase, ~230 V, 50 Hz						
Airflow Rate	Cooling	H/M/L/Q	m³/h	940/880/820/750	1,100/910/750/580	1,100/910/750/580	1,900/1,620/1,270/980	1,900/1,620/1,270/980	2,100/1,750/1,350/1,070	
	Heating	H/M/L/Q		940/880/820/750	1,100/910/750/580	1,100/910/750/580	2,100/1,620/1,270/980	2,100/1,620/1,270/980	2,100/1,750/1,350/1,070	
Net Dimensions H × W × D				mm	198 × 900 × 620	270 × 1135 × 700	270 × 1135 × 700	270 × 1135 × 700	270 × 1135 × 700	270 × 1135 × 700
Weight				kg	23	38	40	40	40	40 (88)

Indoor Units Model name				Floor/Ceiling, Ceiling						
				ABYG18LVTB	ABYG22LVTA	ABYG24LVTA	ABYG30LRTE	ABYG36LRTE	ABYG45LRTE	
Power Source				Single phase, ~230 V, 50 Hz						
Airflow Rate	Cooling	H/M/L/Q	m³/h	780/700/560/500	980/820/680/540	980/820/680/540	1,660/1,500/1,200/1,000	1,900/1,500/1,200/1,000	2,100/1,700/1,400/1,100	
	Heating	H/M/L/Q		780/700/560/500	980/820/680/540	980/820/680/540	1,660/1,500/1,200/1,000	1,900/1,500/1,200/1,000	2,100/1,700/1,400/1,100	
Net Dimensions H × W × D				mm	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655	240 × 1660 × 700	240 × 1660 × 700	240 × 1660 × 700
Weight				kg	27	27	27	46	46	46


Outdoor Units Model name			AOYG72LRLA			AOYG90LRLA		
Capacity	Cooling	kW	19.0			22.0		
	Heating		22.4			27.0		
Power Source			3-phase, ~400 V, 50 Hz					
Sound Pressure Level (High)	Cooling/Heating	dB(A)	55/55			55/57		
Airflow Rate	Cooling/Heating	m³/h	8,400/8,400			8,400/9,000		
Net Dimensions H × W × D		mm	1,428 × 1,080 × 480			1,428 × 1,080 × 480		
Weight		kg	163			172		
Connection Pipe Diameter (Liquid/Gas)		mm	12.7/25.4			12.7/25.4		
Max. Pipe Length (Pre-Charge)		m	100 (30)			100 (30)		
Max. Height Difference			30			30		
Operating Range	Cooling	°CDB	-15 to 46			-15 to 46		
	Heating		-20 to 24			-20 to 24		
Refrigerant	Type (Global Warming Potential)		R410A (2,088)			R410A (2,088)		
	Charge	kg (CO2eq-T)	5.6 (11.693)			7.1 (14.825)		
Separation tube			UTP-SX272A × 1 (Twin)	UTP-SX372A × 1 (Triple)	UTP-SX272A × 1 UTP-SX236A × 2 (Double Twin)	UTP-SX272A × 1 (Twin)	UTP-SX372A × 1 (Triple)	UTP-SX272A × 1 UTP-SX254A × 2 (Double Twin)

*: That specification is not fixed yet.

- Indoor units of different types and capacity cannot be connected.
- The above specifications apply when used with a cassette type indoor unit.

Dimensions

(Unit: mm)

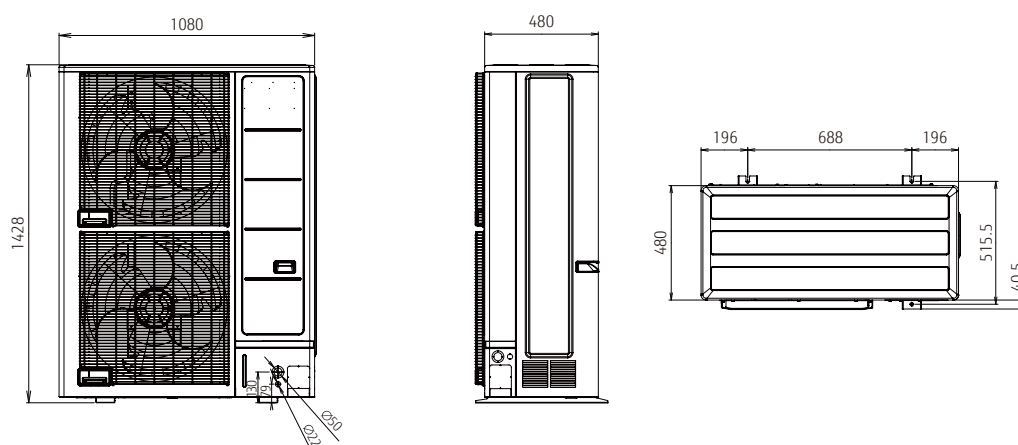

2-unit to 5-unit Multi-split

Indoor Units Specifications



Wall-mounted type



Model name	Indoor unit			ASEH07KGTG ASYG07KGTG	ASEH09KGTG ASYG09KGTG	ASEH12KGTG ASYG12KGTG	ASEH14KGTG ASYG14KGTG
kW Class			kW	2.0	2.5	3.5	4.0
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	54	55	56	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270	770/600/450/280
	Heating			720/580/460/330	750/610/470/330	770/640/520/330	800/660/520/340
Net Dimensions			mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
Weight			kg	10	10	10	10
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52

Wall-mounted type



Model name	Indoor unit			ASEH07KETF ASEH07KETF-B ASYG07KETE ASYG07KETE-B	ASEH09KETF ASEH09KETF-B ASYG09KETE ASYG09KETE-B	ASEH12KETF ASEH12KETF-B ASYG12KETE ASYG12KETE-B	ASEH14KETF ASEH14KETF-B ASYG14KETE ASYG14KETE-B
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	54	55	55	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/270	700/560/430/270	700/560/430/270	770/600/450/280
	Heating			720/580/460/330	750/610/470/330	770/640/520/330	800/660/520/340
Net Dimensions			mm	295 × 950 (wall side: 840) × 230	295 × 950 (wall side: 840) × 230	295 × 950 (wall side: 840) × 230	295 × 950 (wall side: 840) × 230
Weight			kg	11	11	11	11.5
Connection Pipe Diameter		Liquid/Gas		mm	6.35/9.52	6.35/9.52	6.35/9.52


Wall-mounted type



Model name	Indoor unit			ASEH07KMCG ASEH07KMCG-B ASYG07KMCF	ASEH09KMCG ASEH09KMCG-B ASYG09KMCF	ASEH12KMCG ASEH12KMCG-B ASYG12KMCF	ASEH14KMCG ASEH14KMCG-B ASYG14KMCF
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/33/29/21	40/34/29/21	40/35/30/21	43/36/30/21
	Heating			41/35/31/22	42/36/31/22	42/38/33/22	44/39/33/24
Sound Power Level	Cooling	H	dB(A)	54	55	55	57
	Heating			56	57	58	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	650/540/430/320	700/560/430/320	700/560/430/320	770/600/450/310
	Heating			720/580/460/330	750/610/470/330	780/640/520/330	820/660/520/340
Net Dimensions			mm	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215	270 × 834 × 215
Weight			kg	10	10	10	10
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52



Wall-mounted type



Model name	Indoor unit			ASEH05KNCA	ASEH07KNCA	ASEH09KNCA	ASEH12KNCA
kW Class		kW		1.5	2.0	2.5	3.5
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	34 / 33 / 29 / 21	36 / 33 / 29 / 21	41 / 35 / 29 / 21	42 / 36 / 32 / 21
	Heating			34 / 32 / 30 / 22	36 / 33 / 30 / 22	41 / 34 / 30 / 22	42 / 35 / 31 / 22
Sound Power Level	Cooling	H	dB(A)	50	51	56	57
	Heating			50	51	56	57
Airflow Rate	Cooling	H/M/L/Q	m³/h	500 / 450 / 390 / 250	530 / 460 / 390 / 250	640 / 500 / 390 / 250	660 / 520 / 440 / 250
	Heating			500 / 450 / 420 / 280	530 / 460 / 420 / 280	640 / 500 / 420 / 280	660 / 520 / 440 / 280
Net Dimensions			mm	270 × 784 × 222	270 × 784 × 222	270 × 784 × 222	270 × 784 × 222
Weight			kg	9	9	9	9
Connection Pipe Diameter		Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52

Wall-mounted type



Model name	Indoor unit			ASEG18KMTE	ASEG22KMTE	ASEG24KMTE
kW Class			kW	5.0	6.0	7.0
Power Source				Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	45/40/35/29	48/40/35/29	49/40/35/29
	Heating			46/40/35/29	48/40/35/29	49/40/35/29
Sound Power Level	Cooling	H	dB(A)	60	62	65
	Heating			61	62	65
Airflow Rate	Cooling	H/M/L/Q	m³/h	980/810/640/510	1,060/810/640/510	1,170/850/640/510
	Heating			1,020/850/640/510	1,060/850/640/510	1,170/850/640/510
Net Dimensions			mm	280 × 980 × 240	280 × 980 × 240	280 × 980 × 240
Weight			kg	12.5	12.5	12.5
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70	6.35/12.70	6.35/12.70

Floor



Model name	Indoor unit			AGEG09KVCA	AGEG12KVCA	AGEG14KVCA
kW Class			kW	2.5	3.5	4.0
Power Source				Single phase, ~230 V, 50 Hz		
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	39/34/28/22	42/36/30/22	44/38/31/22
	Heating			39/35/30/22	42/38/32/22	44/39/33/22
Sound Power Level	Cooling	H	dB(A)	52	55	56
	Heating			52	55	56
Airflow Rate	Cooling	H/M/L/Q	m³/h	530/440/360/270	600/490/380/270	650/520/400/270
	Heating			530/460/380/270	600/510/410/270	650/540/430/270
Net Dimensions			mm	600 × 740 × 200	600 × 740 × 200	600 × 740 × 200
Weight			kg	14	14	14
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52



2-unit to 5-unit Multi-split Indoor Units Specifications

Ceiling



Model name	Indoor unit			ABEG18KRTA	ABEG22KRTA
kW Class		kW		5.0	6.0
Power Source				Single phase, ~230 V, 50 Hz	
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	38/36/33/31	42/37/34/31
	Heating			38/36/33/31	42/37/34/31
Sound Power Level	Cooling	H	dB(A)	53	57
	Heating			53	57
Airflow Rate	Cooling	H/M/L/Q	m³/h	840/790/710/650	900/790/710/650
	Heating			840/790/710/650	900/790/710/650
Net Dimensions			mm	235 × 1,080 × 705	
Weight			kg	24	
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70	

Compact Cassette Grid Type



Model name	Indoor unit			AUXG07KVLA	AUXG09KVLA	AUXG12KVLA	AUXG14KVLA	AUXG18KVLA	AUXG22KVLA
kW Class		kW		2.0	2.5	3.5	4.0	5.0	6.0
Power Source				Single phase, ~230 V, 50 Hz					
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	33/31/29/27	37/34/31/28	38/35/32/29	38/35/32/29	44/42/36/30
	Heating			34/32/29/27	34/32/29/27	37/34/31/29	43/38/34/30	43/38/34/30	45/43/40/33
Sound Power Level	Cooling	H	dB(A)	46	46	49	50	50	56
	Heating			47	47	49	55	55	57
Airflow Rate	Cooling	H/M/L/Q	m³/h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	680/580/490/410	830/740/600/450
	Heating			540/490/440/390	540/490/440/390	610/530/470/410	790/680/580/450	790/680/580/450	860/760/700/530
Net Dimensions		mm		245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight		kg		15	15	15	15	15	16
Panel				UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W	UTG-UFYF-W
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70

Mini duct



Model name	Indoor unit			ARXG07KSLAP	ARXG09KSLAP	ARXG12KSLAP	ARXG14KSLAP	ARXG18KSLAP
kW Class		kW		2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230 V, 50 Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
	Heating			29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
Sound Power Level	Cooling	H	dB(A)	52	54	55	60	58
	Heating			53	56	57	62	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
	Heating			550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
Net Dimensions			mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450
Weight			kg	15.5	15.5	15.5	15.5	18.5
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70
External static pressure			Pa	0 to 30	0 to 30	0 to 30	0 to 50	0 to 50
Drain pump				Standard	Standard	Standard	Standard	Standard

Slim duct



Model name	Indoor unit			ARXG07KLLAP	ARXG09KLLAP	ARXG12KLLAP	ARXG14KLLAP	ARXG18KLLAP
kW Class		kW		2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230 V, 50 Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/30/29/27
	Heating			28/26/25/24	28/26/25/24	29/28/27/24	32/30/28/25	32/30/29/27
Sound Power Level	Cooling	H	dB(A)	57	57	58	60	58
	Heating			57	57	58	60	58
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
	Heating			550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimensions			mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620
Weight			kg	16	17	17	17	20
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70
External static pressure			Pa	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90
Drain pump				Standard	Standard	Standard	Standard	Standard



Medium Static Pressure Duct



Model name	Indoor unit			ARXH12KMTAP	ARXH14KMTAP	ARXH18KMTAP	ARXH22KMTAP
kW Class		kW		3.5	4.0	5.0	6.0
Power Source				Single-phase, ~230V, 50Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29 / 27 / 25 / 23	32 / 29 / 27 / 25	33 / 30 / 28 / 26	32/28/25/24
	Heating			29 / 27 / 25 / 23	32 / 29 / 27 / 25	33 / 30 / 28 / 26	32/28/25/24
Sound Power Level	Cooling	H	dB(A)	58	59	60	58
	Heating			58	59	60	58
Airflow Rate	Cooling	H/M/L/Q	m³/h	650 / 520 / 460 / 390	800 / 640 / 560 / 480	840 / 720 / 630 / 540	1,150 / 920 / 800 / 700
	Heating			650 / 520 / 460 / 390	800 / 640 / 560 / 480	840 / 720 / 630 / 540	1,150 / 920 / 800 / 700
Net Dimensions			mm	240 × 700 × 700	240 × 700 × 700	240 × 700 × 700	240 × 1,000 × 700
Weight			kg	24	24	24	31
Connection Pipe Diameter		Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35/12.70
External static pressure			Pa	30 to 150	30 to 150	30 to 150	30 to 150
Drain pump				Standard	Standard	Standard	Standard

Medium Static Pressure Duct



Model name	Indoor unit			ARXG22KMLB
kW Class			kW	6.0
Power Source				Single phase, ~230 V, 50 Hz
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	31/29/27/25
	Heating			31/29/27/25
Sound Power Level	Cooling	H	dB(A)	60
	Heating			62
Airflow Rate	Cooling	H/M/L/Q	m³/h	1,100/910/750/580
	Heating			1,100/910/750/580
Net Dimensions			mm	270 × 1,135 × 700
Weight			kg	35
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70
External static pressure			Pa	30 to 150
Drain pump				Option



6-unit Multi-split Indoor Units Specifications

Compact wall-mounted



Model name		Indoor unit		ASYG07LUCA	ASYG09LUCA	ASYG12LUCA	ASYG14LUCA
kW Class			kW	2.0	2.5	3.5	4.0
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	35/30/28/21	36/32/28/21	37/34/31/21	41/36/33/25
	Heating			35/30/28/21	36/32/28/21	37/34/31/21	41/36/34/27
Sound Power Level	Cooling	H	dB(A)	53	54	55	59
	Heating			53	54	55	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	570/520/470/330	600/550/470/330	660/600/530/330	710/640/570/390
	Heating			570/520/470/330	600/550/470/330	660/600/530/330	710/640/590/430
Net Dimensions			mm	282 × 870 × 185	282 × 870 × 185	282 × 870 × 185	282 × 870 × 185
Weight			kg	9.5	9.5	9.5	9.5
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70

Wall-mounted type



Model name		Indoor unit		ASYG18LFCA		ASYG24LFCC	
kW Class			kW	5.0		7.0	
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	43/37/33/26		49/42/37/33	
	Heating			42/37/33/25		48/42/37/33	
Sound Power Level	Cooling	H	dB(A)	58		64	
	Heating			58		64	
Airflow Rate	Cooling	H/M/L/Q	m³/h	900/740/620/550		1,120/900/740/620	
	Heating			900/740/620/550		1,100/900/740/620	
Net Dimensions			mm	320 × 998 × 238		320 × 998 × 238	
Weight			kg	14		14	
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70		6.35/15.88	

Compact wall-mounted



Model name	Indoor unit			ASYG07LMCE	ASYG09LMCE	ASYG12LMCE	ASYG14LMCE
kW Class		kW		2.0	2.5	3.5	4.0
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/32/29/21	37/33/29/21	40/36/30/21	42/38/33/25
	Heating			36/32/29/22	37/33/29/22	40/36/31/22	42/38/35/27
Sound Power Level	Cooling	H	dB(A)	51	52	54	56
	Heating			51	52	55	57
Airflow Rate	Cooling	H/M/L/Q	m³/h	560/500/430/310	600/520/430/310	660/560/450/310	730/600/530/360
	Heating			560/500/430/330	600/520/430/330	660/560/470/330	730/615/560/375
Net Dimensions			mm	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203
Weight			kg	8.5	8.5	8.5	8.5
Connection Pipe Diameter		Liquid/Gas		mm	6.35/9.52	6.35/9.52	6.35/12.70

Floor




Model name		Indoor unit		AGYG09LVCA		AGYG12LVCA		AGYG14LVCA			
kW Class			kW		2.5		3.5		4.0		
Power Source				Single phase, ~230 V, 50 Hz							
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	39/34/28/22		42/36/30/22		44/38/31/22			
	Heating			39/35/30/22		42/38/32/22		44/39/33/22			
Sound Power Level	Cooling	H	dB(A)	52		55		56			
	Heating			52		55		56			
Airflow Rate	Cooling	H/M/L/Q	m³/h	530/440/360/270		600/490/380/270		650/520/400/270			
	Heating			530/460/380/270		600/510/410/270		650/540/430/270			
Net Dimensions			mm		600 × 740 × 200		600 × 740 × 200		600 × 740 × 200		
Weight			kg		14		14		14		
Connection Pipe Diameter		Liquid/Gas		mm		6.35/9.52		6.35/12.70		6.35/12.70	

**Floor ceiling**

Model name		Indoor unit		ABYG14LVTA		ABYG18LVTB	
kW Class			kW	4.0			5.0
Power Source				Single phase, ~230 V, 50 Hz			
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)		41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)	
	Heating			36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)		41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)	
Sound Power Level	Cooling	H	dB(A)	51		55	
	Heating			51		55	
Airflow Rate	Cooling	H/M/L/Q	m³/h	640/590/540/480		780/700/560/500	
	Heating			640/590/540/480		780/700/560/500	
Net Dimensions			mm	199 × 990 × 655		199 × 990 × 655	
Weight			kg	27		27	
Connection Pipe Diameter		Liquid/Gas	mm	6.35/12.70		6.35/12.70	

Compact cassette

Model name	Indoor unit			AUYG07LVLA	AUYG09LVLA	AUYG12LVLB	AUYG14LVLB	AUYG18LVLB
kW Class		kW		2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230 V, 50 Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	33/31/29/27	33/31/29/27	37/33/31/28	40/35/32/29	42/37/33/29
	Heating			34/32/29/27	34/32/29/27	37/33/31/28	40/37/34/29	44/40/37/30
Sound Power Level	Cooling	H	dB(A)	46	46	49	52	54
	Heating			47	47	49	52	56
Airflow Rate	Cooling	H/M/L/Q	m³/h	540/490/440/390	540/490/440/390	610/530/470/410	680/580/490/410	750/610/520/410
	Heating			540/490/440/390	540/490/440/390	610/530/470/410	700/620/550/430	800/710/600/450
Net Dimensions			mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight			kg	15	15	15	15	15
Panel				UTG-UFYD-W				
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.70	6.35/12.70

Mini duct

Model name		Indoor unit		ARYG07LSLAP	ARYG09LSLAP	ARYG12LSLAP	ARYG14LSLAP	ARYG18LSLAP
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230 V, 50 Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
	Heating			29/26/24/23	29/26/24/23	31/27/25/23	35/30/27/23	33/29/26/23
Sound Power Level	Cooling	H	dB(A)	52	54	55	60	58
	Heating			53	56	57	62	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
	Heating			550/440/390/360	600/450/400/360	650/490/430/360	800/640/530/360	940/750/540/480
Net Dimensions			mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450
Weight			kg	15.5				18.5
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52			6.35/12.70	
External static pressure			Pa	0 to 30			0 to 50	
Drain pump				Standard				

Slim duct

Model name	Indoor unit			ARYG07LLTA	ARYG09LLTA	ARYG12LLTB	ARYG14LLTB	ARYG18LLTB
kW Class			kW	2.0	2.5	3.5	4.0	5.0
Power Source				Single phase, ~230 V, 50 Hz				
Sound Pressure Level	Cooling	H/M/L/Q	dB(A)	28/26/25/24	28/27/26/25	29/28/27/26	32/30/28/26	32/31/30/29
	Heating			28/26/25/24	28/26/25/24	29/28/27/24	33/30/28/25	33/32/31/29
Sound Power Level	Cooling	H	dB(A)	57	57	58	60	58
	Heating			57	57	58	61	59
Airflow Rate	Cooling	H/M/L/Q	m³/h	550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
	Heating			550/490/470/440	600/550/500/450	650/600/550/480	800/700/600/480	940/880/820/750
Net Dimensions			mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620
Weight			kg	17	19	19	19	23
Connection Pipe Diameter		Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7	6.35/12.70
External static pressure			Pa	0 to 90				
Drain pump				Standard				



2-unit Multi-split Combination Table-cooling/Heating

2-unit Multi-split cooling

AOEG14KBT2	Combination of Indoor Units		Cooling Operation							
			Cooling Capacity			Input Power (Min. - Max.)	EER	Seasonal Data		
			Unit 1	Unit 2	Total Capacity (Min. - Max.)			Pdesign	SEER	Energy efficiency class
			kW	kW	kW	kW		kW		
2-unit connection	5	5	1.50	1.50	3.00 (1.40-3.60)	0.74 (0.25-0.95)	4.03	3.0	6.8	A++
	5	7	1.50	2.00	3.50 (1.40-4.30)	0.84 (0.25-1.10)	4.15	3.5	6.8	A++
	5	9	1.50	2.50	4.00 (1.40-4.39)	1.07 (0.25-1.25)	3.75	4.0	6.8	A++
	5	12	1.18	2.82	4.00 (1.40-4.61)	1.02 (0.25-1.25)	3.92	4.0	6.8	A++
	7	7	2.00	2.00	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	7	9	1.75	2.25	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	7	12	1.47	2.53	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	9	9	2.00	2.00	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++
	9	12	1.71	2.29	4.00 (1.4-4.6)	0.97 (0.25-1.20)	4.12	4.0	8.7	A+++

Notes: •5: 5000 Btu/h/7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h models

•The above specifications are listed with the best combination of values selected.

•2 or more indoor units should be connected.

•Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.

•For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1

AOEG18KBT2	Combination of Indoor Units		Cooling Operation							
			Cooling Capacity			Input Power (Min. - Max.)	EER	Seasonal Data		
			Unit 1	Unit 2	Total Capacity (Min. - Max.)			Pdesign	SEER	Energy efficiency class
			kW	kW	kW	kW		kW		
2-unit connection	5	5	1.50	1.50	3.00 (1.70-3.60)	0.53 (0.25-0.94)	5.65	3.0	6.9	A++
	5	7	1.50	2.00	3.50 (1.70-4.30)	0.75 (0.25-1.12)	4.65	3.5	6.9	A++
	5	9	1.50	2.50	4.00 (1.70-5.00)	0.97 (0.25-1.29)	4.10	4.0	6.9	A++
	5	12	1.41	3.39	4.80 (1.70-5.70)	1.20 (0.25-1.58)	4.00	5.0	6.7	A++
	5	14	1.32	3.68	5.00 (1.70-5.80)	1.32 (0.25-1.63)	3.78	5.0	6.7	A++
	7	7	2.00	2.00	4.00 (1.7-5.0)	0.92 (0.25-1.23)	4.35	4.0	8.8	A+++
	7	9	2.00	2.50	4.50 (1.7-5.7)	1.07 (0.25-1.45)	4.22	4.5	8.7	A+++
	7	12	1.84	3.16	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	7	14	1.67	3.33	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	9	9	2.50	2.50	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	9	12	2.14	2.86	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	9	14	1.96	3.04	5.00 (1.7-5.8)	1.24 (0.25 - 1.55)	4.03	5.0	8.6	A+++
	12	12	2.50	2.50	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++
	12	14	2.31	2.69	5.00 (1.7-5.8)	1.24 (0.25-1.55)	4.03	5.0	8.6	A+++

Notes: •5: 5000 Btu/h/7: 7000 Btu/h/9:9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h models

•The above specifications are listed with the best combination of values selected.

•2 or more indoor units should be connected.

•Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.

•For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

2-unit Multi-split heating

AOEG14KBTA2	Combination of Indoor Units		Heating Operation							
			Heating Capacity			Input Power (Min. - Max.)	COP	Seasonal Data		
			Unit 1	Unit 2	Total Capacity (Min. - Max.)			Pdesign	SCOP	Energy efficiency class
			kW	kW	kW			kW		
2-unit connection	5	5	1.80	1.80	3.60 (1.10-4.20)	0.80 (0.25-1.25)	4.52	2.9	4.08	A+
	5	7	1.67	2.33	4.00 (1.10-4.80)	0.92 (0.25-1.50)	4.36	3.4	4.1	A+
	5	9	1.57	2.83	4.40 (1.10-5.10)	1.06 (0.25-1.70)	4.16	3.5	4.1	A+
	5	12	1.29	3.11	4.40 (1.10-5.40)	1.01 (0.25-1.70)	4.34	3.5	4.1	A+
	7	7	2.20	2.20	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	7	9	1.92	2.48	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	7	12	1.62	2.78	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	9	9	2.20	2.20	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++
	9	12	1.89	2.51	4.40 (1.1-5.5)	0.95 (0.25-1.65)	4.63	3.5	4.7	A++

Notes: •5: 5000 Btu/h/7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h models
•The above specifications are listed with the best combination of values selected.
•2 or more indoor units should be connected.
•Heating capacity is determined based on 20°CDB (indoor temperature) and 7°CDB/6°CWB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•Total capacity of indoor units connected must be between 4.0 kW and 6.0 kW.
•For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1

AOEG18KBT A2	Combination of Indoor Units		Heating Operation							
			Heating Capacity			Input Power (Min. - Max.)	COP	Seasonal Data		
			Unit 1	Unit 2	Total Capacity (Min. - Max.)			Pdesign	SCOP	Energy efficiency class
			kW	kW	kW	kW		kW		
2-unit connection	5	5	1.80	1.80	3.60 (1.70-4.20)	0.80 (0.25-0.94)	4.50	2.9	4.1	A+
	5	7	1.80	2.40	4.20 (1.70-4.90)	0.92 (0.25-1.18)	4.54	3.4	4.1	A+
	5	9	1.80	3.00	4.80 (1.70-5.60)	1.05 (0.25-1.41)	4.57	3.8	4.1	A+
	5	12	1.59	3.81	5.40 (1.70-6.40)	1.24 (0.25-1.76)	4.36	4.2	4.0	A+
	5	14	1.47	4.13	5.60 (1.70-6.60)	1.30 (0.25-1.88)	4.30	4.2	4.0	A+
	7	7	2.40	2.40	4.80 (1.7-5.6)	0.99 (0.25-1.35)	4.85	3.8	4.7	A++
	7	9	2.40	3.00	5.40 (1.7-6.4)	1.15 (0.25-1.60)	4.70	4.0	4.7	A++
	7	12	2.06	3.54	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	7	14	1.87	3.73	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	9	9	2.80	2.80	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	9	12	2.40	3.20	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	9	14	2.19	3.41	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	12	12	2.80	2.80	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++
	12	14	2.58	3.02	5.60 (1.7-7.0)	1.22 (0.25-1.80)	4.59	4.2	4.7	A++

Notes: •5: 5000 Btu/h/7: 7000 Btu/h/9:9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h models
•The above specifications are listed with the best combination of values selected.
•2 or more indoor units should be connected.
•Heating capacity is determined based on 20°CDB (indoor temperature) and 7°CDB/6°CWB (outdoor temperature).
•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
•Total capacity of indoor units connected must be between 4.0 kW and 7.5 kW.
•For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1

3-unit Multi-split Combination Table-cooling/Heating

3-unit Multi-split cooling

AOEG18KBT A3	Combination of Indoor Units			Cooling Operation								Seasonal Data		
				Cooling Capacity				Input Power (Min. - Max.)		EER				
				Unit 1 kW	Unit 2 kW	Unit 3 kW	Total Capacity (Min. - Max.) kW	kW			Pdesign kW	SEER	Energy efficiency	
2-unit connection	5	9	-	1.50	2.50	-	4.00 (1.80-5.00)	0.88 (0.43-1.37)		4.55	4.0	6.7	A++	
	5	12	-	1.41	3.39	-	4.80 (1.80-6.10)	1.11 (0.43-1.65)		4.32	5.0	6.5	A++	
	5	14	-	1.42	3.98	-	5.40 (1.80-6.40)	1.39 (0.43-1.83)		3.88	5.4	6.4	A++	
	7	7	-	2.00	2.00	-	4.00 (1.8-5.0)	0.86 (0.35-1.35)		4.65	4.0	8.3	A++	
	7	9	-	2.00	2.50	-	4.50 (1.8-5.7)	1.03 (0.35-1.50)		4.36	4.5	8.2	A++	
	7	12	-	1.99	3.41	-	5.40 (1.8-6.8)	1.41 (0.35-1.81)		3.83	5.4	8.0	A++	
	7	14	-	1.80	3.60	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)		3.83	5.4	8.0	A++	
	9	9	-	2.50	2.50	-	5.00 (1.8-6.4)	1.23 (0.35-1.70)		4.06	5.0	8.1	A++	
	9	12	-	2.31	3.09	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)		3.83	5.4	8.0	A++	
	9	14	-	2.11	3.29	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)		3.83	5.4	8.0	A++	
	12	12	-	2.70	2.70	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)		3.83	5.4	8.0	A++	
	12	14	-	2.49	2.91	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)		3.83	5.4	8.0	A++	
	14	14	-	2.70	2.70	-	5.40 (1.8-7.0)	1.41 (0.35-1.90)		3.83	5.4	8.0	A++	
	3-unit connection	5	5	5	1.50	1.50	1.50	4.50 (1.80-5.40)	0.68 (0.43-1.46)		6.65	4.5	7.1	A++
5		5	7	1.41	1.41	1.98	4.80 (1.80-6.10)	0.83 (0.43-1.65)		5.78	5.0	7.0	A++	
5		5	9	1.42	1.42	2.56	5.40 (1.80-6.80)	0.98 (0.43-1.83)		5.49	5.4	6.9	A++	
5		5	12	1.23	1.23	2.95	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		5	14	1.13	1.13	3.15	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		7	7	1.42	1.99	1.99	5.40 (1.80-6.80)	0.98 (0.43-1.83)		5.49	5.4	6.9	A++	
5		7	9	1.29	1.80	2.31	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		7	12	1.13	1.58	2.70	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		7	14	1.04	1.45	2.91	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		9	9	1.17	2.11	2.11	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		9	12	1.04	1.87	2.49	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		9	14	0.96	1.74	2.70	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
5		12	12	0.93	2.23	2.23	5.40 (1.80-7.00)	1.14 (0.43-1.91)		4.74	5.4	6.9	A++	
7		7	7	1.80	1.80	1.80	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
7		7	9	1.64	1.64	2.12	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
7		7	12	1.45	1.45	2.50	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
7		7	14	1.35	1.35	2.70	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
7		9	9	1.52	1.94	1.94	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
7		9	12	1.35	1.74	2.31	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
7		9	14	1.26	1.62	2.52	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
9		9	9	1.80	1.80	1.80	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	
9		9	12	1.62	1.62	2.16	5.40 (1.8-7.0)	1.13 (0.35-1.90)		4.78	5.4	8.6	A+++	

AOEG24KBT A3	Combination of Indoor Units			Cooling Operation									
				Cooling Capacity				Input Power (Min. - Max.)	EER	Seasonal Data			
				Unit 1	Unit 2	Unit 3	Total Capacity (Min. - Max.)			Pdesign	SEER	Energy efficiency	
				kW	kW	kW	kW			kW			
2-unit connection	5	9	-	1.80	3.00	-	4.80 (2.00-5.60)	1.06 (0.30-1.36)	4.53	4.0	6.7	A++	
	5	12	-	1.68	4.02	-	5.70 (2.00-6.80)	1.38 (0.30-1.70)	4.12	5.0	6.5	A++	
	5	14	-	1.80	4.80	-	6.60 (2.00-7.60)	1.78 (0.30-1.89)	3.71	5.5	6.4	A++	
	5	18	-	1.67	6.03	-	7.70 (2.00-8.60)	2.03 (0.30-2.37)	3.79	6.5	5.5	A	
	7	7	-	2.00	2.00	-	4.00 (1.8-5.0)	0.86 (0.35-1.35)	4.65	4.0	8.3	A++	
	7	9	-	2.00	2.50	-	4.50 (1.8-5.7)	1.03 (0.35-1.54)	4.36	4.5	8.2	A++	
	7	12	-	2.00	3.50	-	5.50 (1.8-6.8)	1.46 (0.35-1.85)	3.77	5.5	8.0	A++	
	7	14	-	2.00	4.00	-	6.00 (1.8-7.5)	1.73 (0.35-2.20)	3.48	6.0	7.6	A++	
	7	18	-	1.90	4.90	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++	
	9	9	-	2.50	2.50	-	5.00 (1.8-6.4)	1.23 (0.35-1.74)	4.06	5.0	8.1	A++	
	9	12	-	2.50	3.50	-	6.00 (1.8-7.5)	1.73 (0.35-2.20)	3.48	6.0	7.6	A++	
	9	14	-	2.50	4.00	-	6.50 (1.8-8.2)	2.04 (0.35-2.46)	3.19	6.5	7.2	A++	
	9	18	-	2.27	4.53	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++	
	12	12	-	3.40	3.40	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++	
	12	14	-	3.14	3.66	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++	
	12	18	-	2.72	4.08	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++	
	14	14	-	3.40	3.40	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++	
	14	18	-	2.98	3.82	-	6.80 (1.8-8.5)	2.26 (0.35-2.65)	3.01	6.8	6.9	A++	
3-unit connection	5	5	5	1.70	1.70	1.70	5.10 (2.00-6.00)	1.23 (0.30-1.47)	4.16	4.5	6.6	A++	
	5	5	7	1.68	1.68	2.35	5.70 (2.00-6.80)	1.37 (0.30-1.70)	4.17	5.0	6.5	A++	
	5	5	9	1.80	1.80	3.00	6.60 (2.00-7.60)	1.51 (0.30-1.89)	4.38	5.5	6.4	A++	
	5	5	12	1.70	1.70	4.09	7.50 (2.00-8.80)	1.72 (0.30-2.26)	4.37	6.5	6.2	A++	
	5	5	14	1.67	1.67	4.67	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	5	5	18	1.43	1.43	5.14	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.8	6.2	A++	
	5	7	7	1.80	2.40	2.40	6.60 (2.00-7.60)	1.51 (0.30-1.89)	4.38	5.5	6.4	A++	
	5	7	9	1.80	1.80	3.00	7.20 (2.00-8.40)	1.65 (0.30-2.11)	4.37	6.0	6.3	A++	
	5	7	12	1.67	2.33	4.00	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	5	7	14	1.54	2.15	4.31	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	5	7	18	1.33	1.87	4.80	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.8	6.2	A++	
	5	9	9	1.80	3.00	3.00	7.80 (2.00-9.20)	1.79 (0.30-2.37)	4.36	6.5	6.2	A++	
	5	9	12	1.54	2.77	3.69	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	5	9	14	1.43	2.57	4.00	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	5	9	18	1.25	2.25	4.50	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.8	6.2	A++	
	5	12	12	1.38	3.31	3.31	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	5	12	14	1.29	3.10	3.61	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	5	12	18	1.14	2.74	4.11	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.8	6.2	A++	
	5	14	14	1.21	3.39	3.39	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.8	6.2	A++	
	7	7	7	2.00	2.00	2.00	6.00 (1.8-7.5)	1.37 (0.35-2.20)	4.37	6.0	8.6	A+++	
	7	7	9	2.00	2.00	2.50	6.50 (1.8-8.2)	1.59 (0.35-2.46)	4.08	6.5	8.5	A+++	
	7	7	12	1.83	1.83	3.14	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7	7	14	1.70	1.70	3.40	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7	7	18	1.49	1.49	3.82	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	9	1.90	2.45	2.45	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	12	1.70	2.19	2.91	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	14	1.59	2.04	3.17	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
	7	9	18	1.40	1.80	3.60	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++	
7	12	12	1.54	2.63	2.63	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
7	12	14	1.44	2.47	2.89	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
7	14	14	1.36	2.72	2.72	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
9	9	9	2.27	2.27	2.27	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
9	9	12	2.04	2.04	2.72	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
9	9	14	1.91	1.91	2.98	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
9	9	18	1.70	1.70	3.40	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
9	12	12	1.86	2.47	2.47	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
9	12	14	1.75	2.33	2.72	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		
12	12	12	2.27	2.27	2.27	6.80 (1.8-8.5)	1.74 (0.35-2.65)	3.90	6.8	8.5	A+++		



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

3-unit Multi-split heating

AOEG18KBT A3	Combination of Indoor Units			Heating Operation									
				Heating Capacity				Input Power (Min. - Max.)	COP	Seasonal Data			
				Unit 1	Unit 2	Unit 3	Total Capacity (Min. - Max.)			Pdesign	SCOP	Energy efficiency	
	kW	kW	kW	kW	kW	kW	kW						
2-unit connection	5	9	-	1.80	3.00	-	4.80 (2.00-5.60)	1.04 (0.30-1.34)	4.61	4.0	4.0	A+	
	5	12	-	1.80	4.20	-	6.00 (2.00-6.90)	1.35 (0.30-1.56)	4.43	4.5	3.9	A	
	5	14	-	1.80	4.80	-	6.60 (2.00-7.40)	1.64 (0.30-1.77)	4.02	5.0	3.8	A	
	7	7	-	2.40	2.40	-	4.80 (2.0-5.6)	1.00 (0.25-1.30)	4.80	4.0	4.2	A+	
	7	9	-	2.40	3.00	-	5.40 (2.0-6.4)	1.21 (0.25-1.48)	4.45	4.0	4.2	A+	
	7	12	-	2.40	4.20	-	6.60 (2.0-7.6)	1.66 (0.25-1.76)	3.98	5.0	4.0	A+	
	7	14	-	2.27	4.53	-	6.80 (2.0-8.0)	1.77 (0.25-1.85)	3.84	5.0	4.0	A+	
	9	9	-	3.00	3.00	-	6.00 (2.0-7.2)	1.44 (0.25-1.67)	4.17	4.5	4.1	A+	
	9	12	-	2.91	3.89	-	6.80 (2.0-8.0)	1.77 (0.25-1.85)	3.84	5.0	4.0	A+	
	9	14	-	2.66	4.14	-	6.80 (2.0-8.0)	1.77 (0.25-1.85)	3.84	5.0	4.0	A+	
	12	12	-	3.40	3.40	-	6.80 (2.0-8.0)	1.77 (0.25-1.85)	3.84	5.0	4.0	A+	
	12	14	-	3.14	3.66	-	6.80 (2.0-8.0)	1.77 (0.25-1.85)	3.84	5.0	4.0	A+	
	14	14	-	3.40	3.40	-	6.80 (2.0-8.0)	1.77 (0.25-1.85)	3.84	5.0	4.0	A+	
	3-unit connection	5	5	5	1.70	1.70	1.70	5.10 (2.00-6.00)	0.76 (0.30-1.41)	6.68	4.0	4.3	A+
5		5	7	1.80	1.80	2.40	6.00 (2.00-6.80)	0.97 (0.30-1.56)	6.17	4.5	4.2	A+	
5		5	9	1.80	1.80	3.00	6.60 (2.00-7.60)	1.18 (0.30-1.77)	5.58	5.0	4.1	A+	
5		5	12	1.50	1.50	3.80	6.80 (2.00-8.00)	1.39 (0.30-1.85)	4.89	5.0	4.1	A+	
5		5	14	1.42	1.42	3.97	6.80 (2.00-8.00)	1.39 (0.30-1.85)	4.89	5.0	4.1	A+	
5		7	7	1.80	2.40	2.40	6.60 (2.00-7.60)	1.18 (0.30-1.77)	5.58	5.0	4.1	A+	
5		7	9	1.50	2.30	3.00	6.80 (2.00-8.00)	1.39 (0.30-1.85)	4.89	5.0	4.1	A+	
5		7	12	1.38	1.93	3.30	6.60 (2.00-8.00)	1.39 (0.30-1.85)	4.74	5.0	4.1	A+	
5		7	14	1.31	1.83	3.66	6.80 (2.00-8.00)	1.39 (0.30-1.85)	4.89	5.0	4.1	A+	
5		9	9	1.48	2.66	2.66	6.80 (2.00-8.00)	1.39 (0.30-1.85)	4.89	5.0	4.1	A+	
5		9	12	1.27	2.28	3.05	6.60 (2.00-8.00)	1.39 (0.30-1.85)	4.74	5.0	4.1	A+	
5		9	14	1.21	2.19	3.40	6.80 (2.00-8.00)	1.39 (0.30-1.85)	4.89	5.0	4.1	A+	
5		12	12	1.14	2.73	2.73	6.60 (2.00-8.00)	1.39 (0.30-1.85)	4.74	5.0	4.1	A+	
7		7	7	2.27	2.27	2.27	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
7		7	9	2.07	2.07	2.66	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
7		7	12	1.83	1.83	3.14	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
7		7	14	1.70	1.70	3.40	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
7		9	9	1.90	2.45	2.45	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
7		9	12	1.70	2.19	2.91	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
7		9	14	1.59	2.04	3.17	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
9		9	9	2.27	2.27	2.27	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++	
9	9	12	2.04	2.04	2.72	6.80 (2.0-8.0)	1.39 (0.25-1.85)	4.89	5.0	4.7	A++		

AOEG24KBT A3	Combination of Indoor Units			Heating Operation									
				Heating Capacity				Input Power (Min. - Max.)	COP	Seasonal Data			
				Unit 1	Unit 2	Unit 3	Total Capacity (Min. - Max.)			Pdesign	SCOP	Energy efficiency	
				kW	kW	kW	kW			kW	kW	kW	
2-unit connection	5	9	-	1.80	3.00	-	4.80 (2.00-5.60)	1.06 (0.30-1.36)	4.53	4.0	4.0	A+	
	5	12	-	1.68	4.02	-	5.70 (2.00-6.80)	1.38 (0.30-1.70)	4.12	4.5	3.9	A	
	5	14	-	1.80	4.80	-	6.60 (2.00-7.60)	1.78 (0.30-1.89)	3.71	5.0	3.8	A	
	5	18	-	1.67	6.03	-	7.70 (2.00-8.60)	2.03 (0.30-2.37)	3.79	5.8	3.8	A	
	7	7	-	2.40	2.40	-	4.80 (2.0-5.6)	1.00 (0.25-1.30)	4.80	4.0	4.2	A+	
	7	9	-	2.40	3.00	-	5.40 (2.0-6.4)	1.21 (0.25-1.48)	4.45	4.0	4.2	A+	
	7	12	-	2.40	4.20	-	6.60 (2.0-7.6)	1.66 (0.25-1.76)	3.98	5.0	4.0	A+	
	7	14	-	2.40	4.80	-	7.20 (2.0-8.4)	1.86 (0.25-2.07)	3.87	5.4	4.0	A+	
	7	18	-	2.16	5.54	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+	
	9	9	-	3.00	3.00	-	6.00 (2.0-7.2)	1.44 (0.25-1.67)	4.17	4.5	4.1	A+	
	9	12	-	3.00	4.20	-	7.20 (2.0-8.4)	1.86 (0.25-2.07)	3.87	5.4	4.0	A+	
	9	14	-	2.96	4.74	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+	
	9	18	-	2.57	5.13	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+	
	12	12	-	3.85	3.85	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+	
	12	14	-	3.55	4.15	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+	
	12	18	-	3.08	4.62	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+	
14	14	-	3.85	3.85	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+		
14	18	-	3.37	4.33	-	7.70 (2.0-9.2)	2.01 (0.25-2.35)	3.83	5.8	4.0	A+		
3-unit connection	5	5	5	1.70	1.70	1.70	5.10 (2.00-6.00)	1.23 (0.30-1.47)	4.16	4.0	4.2	A+	
	5	5	7	1.68	1.68	2.35	5.70 (2.00-6.80)	1.37 (0.30-1.70)	4.17	4.5	4.1	A+	
	5	5	9	1.80	1.80	3.00	6.60 (2.00-7.60)	1.51 (0.30-1.89)	4.38	5.0	4.1	A+	
	5	5	12	1.70	1.70	4.09	7.50 (2.00-8.80)	1.72 (0.30-2.26)	4.37	5.8	3.9	A	
	5	5	14	1.67	1.67	4.67	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	5.9	3.9	A	
	5	5	18	1.43	1.43	5.14	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.0	3.9	A	
	5	7	7	1.80	2.40	2.40	6.60 (2.00-7.60)	1.51 (0.30-1.89)	4.38	5.0	4.1	A+	
	5	7	9	1.80	1.80	3.00	7.20 (2.00-8.40)	1.65 (0.30-2.11)	4.37	5.4	4.0	A+	
	5	7	12	1.67	2.33	4.00	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.0	3.9	A	
	5	7	14	1.54	2.15	4.31	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.0	3.9	A	
	5	7	18	1.33	1.87	4.80	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.0	3.9	A	
	5	9	9	1.80	3.00	3.00	7.80 (2.00-9.20)	1.79 (0.30-2.37)	4.36	5.8	3.9	A	
	5	9	12	1.54	2.77	3.69	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.0	3.9	A	
	5	9	14	1.43	2.57	4.00	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.0	3.9	A	
	5	9	18	1.25	2.25	4.50	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.0	3.9	A	
	5	12	12	1.38	3.31	3.31	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.0	3.9	A	
	5	12	14	1.29	3.10	3.61	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.0	3.9	A	
	5	12	18	1.14	2.74	4.11	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.34	6.0	3.9	A	
	5	14	14	1.21	3.39	3.39	8.00 (2.00-9.20)	1.84 (0.30-2.37)	4.35	6.0	3.9	A	
	7	7	7	2.40	2.40	2.40	7.20 (2.0-8.4)	1.61 (0.25-2.07)	4.48	5.4	4.7	A++	
	7	7	9	2.40	2.40	3.00	7.80 (2.0-9.2)	1.76 (0.25-2.35)	4.42	5.8	4.6	A++	
	7	7	12	2.15	2.15	3.70	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++	
	7	7	14	2.00	2.00	4.00	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++	
	7	7	18	1.75	1.75	4.50	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++	
	7	9	9	2.24	2.88	2.88	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++	
	7	9	12	2.00	2.57	3.43	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++	
	7	9	14	1.87	2.40	3.73	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++	
	7	9	18	1.65	2.12	4.23	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++	
7	12	12	1.80	3.10	3.10	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
7	12	14	1.70	2.91	3.39	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
7	14	14	1.60	3.20	3.20	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
9	9	9	2.67	2.67	2.67	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
9	9	12	2.40	2.40	3.20	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
9	9	14	2.25	2.25	3.50	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
9	9	18	2.00	2.00	4.00	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
9	12	12	2.18	2.91	2.91	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
9	12	14	2.06	2.74	3.20	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		
12	12	12	2.67	2.67	2.67	8.00 (2.0-9.2)	1.82 (0.25-2.35)	4.40	6.0	4.6	A++		

4-unit Multi-split Combination Table-cooling

4-unit Multi-split cooling

AOEG30KBTA4	Combination of Indoor Units				Cooling Operation									
					Cooling Capacity				Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	EER	Seasonal Data		
					Unit 1	Unit 2	Unit 3	Unit 4				Pdesign	SEER	Energy efficiency
					kW	kW	kW	kW	kW		kW			
2-unit connection	5	22	-	-	1.50	6.00	-	-	7.50 (2.40-9.40)	2.50 (0.45-3.00)	3.00	7.5	6.0	A+
	5	24	-	-	1.38	6.62	-	-	8.00 (2.40-9.50)	2.72 (0.45-3.30)	2.94	8.0	5.9	A+
	7	22	-	-	2.00	6.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	7	24	-	-	1.81	6.19	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	9	22	-	-	2.32	5.68	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	9	24	-	-	2.18	5.82	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	12	18	-	-	3.20	4.80	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	12	22	-	-	2.82	5.18	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	12	24	-	-	2.67	5.33	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	14	18	-	-	3.50	4.50	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	14	22	-	-	3.11	4.89	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	14	24	-	-	2.95	5.05	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	18	18	-	-	4.00	4.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	18	22	-	-	3.60	4.40	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	18	24	-	-	3.43	4.57	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	22	22	-	-	4.00	4.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	22	24	-	-	3.83	4.17	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
	24	24	-	-	4.00	4.00	-	-	8.00 (2.4-10.1)	2.67 (0.45-3.25)	3.00	8.0	7.5	A++
3-unit connection	5	5	18	-	1.50	1.50	5.00	-	8.00 (2.40-9.60)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	5	22	-	1.25	1.25	5.50	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	5	24	-	1.18	1.18	5.65	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	7	18	-	1.33	1.87	4.80	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	7	22	-	1.18	1.65	5.18	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	7	24	-	1.11	1.56	5.33	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	9	14	-	1.50	2.50	4.00	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	9	18	-	1.25	2.25	4.50	-	8.00 (2.40-10.00)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	9	22	-	1.11	2.00	4.89	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	9	24	-	1.05	1.89	5.05	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	12	12	-	1.38	3.31	3.31	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	12	14	-	1.29	3.10	3.61	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	12	18	-	1.14	2.74	4.11	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	12	22	-	1.03	2.46	4.51	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	12	24	-	0.98	2.34	4.68	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	14	14	-	1.21	3.39	3.39	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	14	18	-	1.08	3.03	3.89	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	14	22	-	0.98	2.73	4.29	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	14	24	-	0.93	2.60	4.47	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	18	18	-	0.98	3.51	3.51	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	18	22	-	0.89	3.20	3.91	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	5	18	24	-	0.85	3.06	4.09	-	8.00 (2.40-10.10)	2.37 (0.45-3.30)	3.38	8.0	6.3	A++
	7	7	12	-	2.00	2.00	3.50	-	7.50 (2.4-9.3)	2.10 (0.45-2.84)	3.57	7.5	8.1	A++
	7	7	14	-	2.00	2.00	4.00	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	7	18	-	1.75	1.75	4.50	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	7	22	-	1.56	1.56	4.88	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	7	24	-	1.47	1.47	5.06	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	9	9	-	2.00	2.50	2.50	-	7.00 (2.4-8.9)	1.90 (0.45-2.65)	3.69	7.0	8.2	A++
	7	9	12	-	2.00	2.50	3.50	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	9	14	-	1.87	2.40	3.73	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	9	18	-	1.64	2.12	4.24	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	9	22	-	1.47	1.89	4.64	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	9	24	-	1.40	1.80	4.80	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	12	12	-	1.80	3.10	3.10	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	12	14	-	1.70	2.91	3.39	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	12	18	-	1.51	2.59	3.90	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	12	22	-	1.37	2.34	4.29	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	12	24	-	1.30	2.23	4.47	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	14	14	-	1.60	3.20	3.20	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	14	18	-	1.44	2.87	3.69	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	14	22	-	1.30	2.60	4.10	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	14	24	-	1.24	2.49	4.27	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	18	18	-	1.30	3.35	3.35	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	18	22	-	1.19	3.06	3.75	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	7	18	24	-	1.14	2.94	3.92	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	9	9	-	2.50	2.50	2.50	-	7.50 (2.4-9.6)	2.10 (0.45-3.01)	3.57	7.5	8.1	A++
	9	9	12	-	2.40	2.40	3.20	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	9	14	-	2.25	2.25	3.50	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	9	18	-	2.00	2.00	4.00	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	9	22	-	1.80	1.80	4.40	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	9	24	-	1.71	1.71	4.58	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	12	12	-	2.18	2.91	2.91	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	12	14	-	2.06	2.74	3.20	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	12	18	-	1.85	2.46	3.69	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	12	22	-	1.67	2.23	4.10	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	12	24	-	1.60	2.13	4.27	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	14	14	-	1.94	3.03	3.03	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	14	18	-	1.76	2.73	3.51	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	14	22	-	1.60	2.49	3.91	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	14	24	-	1.53	2.38	4.09	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	9	18	18	-	1.60	3.20	3.20	-	8.00(2.4-10.1)	2.32(0.45-3.25)	3.45	8.0	8.0	A++
	12	12	12	-	2.67	2.67	2.67	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	12	12	14	-	2.53	2.53	2.94	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	12	12	18	-	2.29	2.29	3.42	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	12	12	22	-	2.09	2.09	3.82	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	12	12	24	-	2.00	2.00	4.00	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
	12	14	14	-	2.40	2.80	2.80	-	8.00 (2.4-10.1)	2.32 (0.45-3.25)	3.45	8.0	8.0	A++
12	14	18	-	2.18	2.55	3.2								



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

4-unit Multi-split cooling

AOEG30KBTA4	Combination of Indoor Units				Cooling Operation							Seasonal Data		
					Cooling Capacity				Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	EER			
					Unit 1	Unit 2	Unit 3	Unit 4				kW	kW	kW
	5	5	5	12	1.39	1.39	1.39	3.33	7.50 (2.40-9.30)	1.99 (0.45-3.00)	3.77	8.0	6.7	A++
	5	5	5	14	1.38	1.38	1.38	3.86	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	5	18	1.21	1.21	1.21	4.36	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	5	22	1.08	1.08	1.08	4.76	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	5	24	1.03	1.03	1.03	4.92	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	7	12	1.38	1.38	1.93	3.31	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	7	14	1.29	1.29	1.81	3.61	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	7	18	1.14	1.14	1.60	4.11	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	7	22	1.03	1.03	1.44	4.51	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	7	24	0.98	0.98	1.37	4.68	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	9	9	1.50	1.50	2.50	2.50	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	9	12	1.29	1.29	2.32	3.10	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	9	14	1.21	1.21	2.18	3.39	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	9	18	1.08	1.08	1.95	3.89	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	9	24	0.93	0.93	1.67	4.47	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	12	12	1.18	1.18	2.82	2.82	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	12	14	1.11	1.11	2.67	3.11	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	12	18	1.00	1.00	2.40	3.60	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	12	24	0.87	0.87	2.09	4.17	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	14	14	1.05	1.05	2.95	2.95	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	14	18	0.95	0.95	2.67	3.43	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	5	18	18	0.87	0.87	3.13	3.13	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	7	9	1.50	2.00	2.00	2.50	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	7	12	1.29	1.81	1.81	3.10	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	7	14	1.21	1.70	1.70	3.39	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	7	18	1.08	1.51	1.51	3.89	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	7	22	0.98	1.37	1.37	4.29	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	7	24	0.93	1.30	1.30	4.47	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	9	9	1.33	1.87	2.40	2.40	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	9	12	1.21	1.70	2.18	2.91	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	9	14	1.14	1.60	2.06	3.20	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	9	18	1.03	1.44	1.85	3.69	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	9	24	0.89	1.24	1.60	4.27	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	12	12	1.11	1.56	2.67	2.67	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	12	14	1.05	1.47	2.53	2.95	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	12	18	0.95	1.33	2.29	3.43	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	12	24	0.83	1.17	2.00	4.00	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	14	14	1.00	1.40	2.80	2.80	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	14	18	0.91	1.27	2.55	3.27	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	7	18	18	0.83	1.17	3.00	3.00	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	9	9	1.25	2.25	2.25	2.25	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	9	12	1.14	2.06	2.06	2.74	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	9	14	1.08	1.95	1.95	3.03	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	9	18	0.98	1.76	1.76	3.51	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	12	12	1.05	1.89	2.53	2.53	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	12	14	1.00	1.80	2.40	2.80	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
4-unit connection	5	9	12	18	0.91	1.64	2.18	3.27	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	14	14	0.95	1.71	2.67	2.67	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	9	14	18	0.87	1.57	2.43	3.13	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	12	12	12	0.98	2.34	2.34	2.34	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	12	12	14	0.93	2.23	2.23	2.60	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	12	12	18	0.85	2.04	2.04	3.06	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	12	14	14	0.89	2.13	2.49	2.49	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	12	14	18	0.82	1.96	2.29	2.94	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	5	14	14	14	0.85	2.38	2.38	2.38	8.00 (2.40-10.10)	2.10 (0.45-3.30)	3.81	8.0	6.7	A++
	7	7	7	7	2.00	2.00	2.00	2.00	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	9	1.87	1.87	1.87	2.39	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	12	1.70	1.70	1.70	2.90	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	14	1.60	1.60	1.60	3.20	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	7	18	1.44	1.44	1.44	3.68	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	9	1.75	1.75	2.25	2.25	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	12	1.60	1.60	2.06	2.74	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	14	1.51	1.51	1.95	3.03	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	9	18	1.37	1.37	1.76	3.50	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	12	12	1.47	1.47	2.53	2.53	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	12	14	1.40	1.40	2.40	2.80	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	12	18	1.27	1.27	2.18	3.28	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	14	14	1.33	1.33	2.67	2.67	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	7	14	18	1.22	1.22	2.43	3.13	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	9	1.64	2.12	2.12	2.12	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	12	1.51	1.95	1.95	2.59	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	14	1.43	1.85	1.85	2.87	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	9	18	1.30	1.67	1.67	3.36	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	12	12	1.40	1.80	2.40	2.40	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	12	14	1.33	1.71	2.29	2.67	8.00 (2.4-10.1)	2.05 (0.45-3.25)	3.90	8.0	8.5	A+++
	7	9	12</											

4-unit Multi-split Combination Table-Heating

4-unit Multi-split heating

AOEG30KBTA4	Combination of Indoor Units				Heating Operation									
					Heating Capacity					Input Power (Min. - Max.)	COP	Seasonal Data		
					Unit 1	Unit 2	Unit 3	Unit 4	Total Capacity (Min. - Max.)			Pdesign	SCOP	Energy efficiency
					kW	kW	kW	kW	kW	kW		kW		
2-unit connection	5	22	-	-	1.67	7.33	-	-	9.00 (3.00-10.60)	2.46 (0.30-2.83)	3.66	6.0	4.0	A+
	5	24	-	-	1.66	7.94	-	-	9.60 (3.00-10.70)	2.55 (0.30-3.03)	3.76	6.5	3.9	A
	7	22	-	-	2.40	7.20	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	7	24	-	-	2.17	7.43	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	9	22	-	-	2.79	6.81	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	9	24	-	-	2.62	6.98	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	12	18	-	-	3.84	5.76	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	12	22	-	-	3.39	6.21	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	12	24	-	-	3.20	6.40	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	14	18	-	-	4.20	5.40	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	14	22	-	-	3.73	5.87	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	14	24	-	-	3.54	6.06	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	18	18	-	-	4.80	4.80	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	18	22	-	-	4.32	5.28	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	18	24	-	-	4.11	5.49	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	22	22	-	-	4.80	4.80	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	22	24	-	-	4.59	5.01	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
	24	24	-	-	4.80	4.80	-	-	9.60 (3.0-11.2)	2.47 (0.30-2.95)	3.89	6.5	4.1	A+
3-unit connection	5	5	18	-	1.71	1.71	6.17	-	9.60 (3.00-10.70)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	5	22	-	1.50	1.50	6.60	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	5	24	-	1.41	1.41	6.78	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	7	18	-	1.60	2.24	5.76	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	7	22	-	1.41	1.98	6.21	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	7	24	-	1.33	1.87	6.40	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	9	14	-	1.71	3.09	4.80	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	9	18	-	1.50	2.70	5.40	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	9	22	-	1.33	2.40	5.87	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	9	24	-	1.26	2.27	6.06	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	12	12	-	1.66	3.97	3.97	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	12	14	-	1.55	3.72	4.34	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	12	18	-	1.37	3.29	4.94	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	12	22	-	1.23	2.95	5.42	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	12	24	-	1.17	2.81	5.62	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	14	14	-	1.45	4.07	4.07	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	14	18	-	1.30	3.63	4.67	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	14	22	-	1.17	3.28	5.15	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	14	24	-	1.12	3.13	5.36	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	18	18	-	1.17	4.21	4.21	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	18	22	-	1.07	3.84	4.69	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	5	18	24	-	1.02	3.68	4.90	-	9.60 (3.00-11.20)	2.36 (0.30-3.03)	4.07	6.5	4.0	A+
	7	7	12	-	2.40	2.40	4.20	-	9.00 (3.0-10.4)	2.11 (0.30-2.60)	4.27	6.0	4.4	A+
	7	7	14	-	2.40	2.40	4.80	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	7	18	-	2.10	2.10	5.40	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	7	22	-	1.87	1.87	5.86	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	7	24	-	1.77	1.77	6.06	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	9	9	-	2.40	3.00	3.00	-	8.40 (3.0-10.0)	1.94 (0.30-2.45)	4.32	6.0	4.4	A+
	7	9	12	-	2.40	3.00	4.20	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	9	14	-	2.24	2.88	4.48	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	9	18	-	1.98	2.54	5.08	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	9	22	-	1.77	2.27	5.56	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	9	24	-	1.68	2.16	5.76	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	12	12	-	2.16	3.72	3.72	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	12	14	-	2.04	3.49	4.07	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	12	18	-	1.82	3.11	4.67	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	12	22	-	1.64	2.81	5.15	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	12	24	-	1.56	2.68	5.36	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	14	14	-	1.92	3.84	3.84	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	14	18	-	1.72	3.45	4.43	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	14	22	-	1.56	3.13	4.91	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	14	24	-	1.49	2.99	5.12	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	18	18	-	1.56	4.02	4.02	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	18	22	-	1.43	3.68	4.49	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	7	18	24	-	1.37	3.53	4.70	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	9	9	-	3.00	3.00	3.00	-	9.00 (3.0-10.8)	2.11 (0.30-2.76)	4.27	6.0	4.4	A+
	9	9	12	-	2.88	2.88	3.84	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	9	14	-	2.70	2.70	4.20	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	9	18	-	2.40	2.40	4.80	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	9	22	-	2.16	2.16	5.28	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	9	24	-	2.06	2.06	5.48	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	12	12	-	2.62	3.49	3.49	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	12	14	-	2.47	3.29	3.84	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	12	18	-	2.22	2.95	4.43	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	12	22	-	2.01	2.68	4.91	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	12	24	-	1.92	2.56	5.12	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	14	14	-	2.34	3.63	3.63	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	14	18	-	2.11	3.28	4.21	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	14	22	-	1.92	2.99	4.69	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	14	24	-	1.84	2.86	4.90	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	9	18	18	-	1.92	3.84	3.84	-	9.60(3.0-11.2)	2.27(0.30-2.95)	4.22	6.5	4.3	A+
	12	12	12	-	3.20	3.20	3.20	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	12	12	14	-	3.03	3.03	3.54	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	12	12	18	-	2.74	2.74	4.12	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	12	12	22	-	2.50	2.50	4.60	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	12	12	24	-	2.40	2.40	4.80	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
	12	14	14	-	2.88	3.36	3.36	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+
12	14	18	-	2.62	3.05	3.93	-	9.60 (3.0-11.2)	2.27 (0.30-2.95)	4.22	6.5	4.3	A+	
12	18	18	-	2.40	3.60	3								



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

4-unit Multi-split heating

AOEG30KBT4	Combination of Indoor Units				Heating Operation							Seasonal Data		
					Heating Capacity				Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	COP			
					Unit 1	Unit 2	Unit 3	Unit 4				kW	kW	
4-unit connection	5	5	5	12	1.67	1.67	1.67	4.00	9.00 (3.00-10.80)	2.10 (0.30-2.83)	4.29	6.5	4.3	A+
	5	5	5	14	1.66	1.66	1.66	4.63	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	5	18	1.45	1.45	1.45	5.24	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	5	22	1.30	1.30	1.30	5.71	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	5	24	1.23	1.23	1.23	5.91	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	7	12	1.66	1.66	2.32	3.97	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	7	14	1.55	1.55	2.17	4.34	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	7	18	1.37	1.37	1.92	4.94	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	7	22	1.23	1.23	1.72	5.42	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	7	24	1.17	1.17	1.64	5.62	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	9	9	1.71	1.71	3.09	3.09	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	9	12	1.55	1.55	2.79	3.72	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	9	14	1.45	1.45	2.62	4.07	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	9	18	1.30	1.30	2.34	4.67	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	9	24	1.12	1.12	2.01	5.36	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	12	12	1.41	1.41	3.39	3.39	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	12	14	1.33	1.33	3.20	3.73	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	12	18	1.20	1.20	2.88	4.32	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	12	24	1.04	1.04	2.50	5.01	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	14	14	1.26	1.26	3.54	3.54	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	14	18	1.14	1.14	3.20	4.11	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	5	18	18	1.04	1.04	3.76	3.76	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	7	9	1.71	2.40	2.40	3.09	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	7	12	1.55	2.17	2.17	3.72	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	7	14	1.45	2.04	2.04	4.07	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	7	18	1.30	1.82	1.82	4.67	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	7	22	1.17	1.64	1.64	5.15	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	7	24	1.12	1.56	1.56	5.36	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	9	9	1.60	2.24	2.88	2.88	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	9	12	1.45	2.04	2.62	3.49	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	9	14	1.37	1.92	2.47	3.84	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	9	18	1.23	1.72	2.22	4.43	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	9	24	1.07	1.49	1.92	5.12	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	12	12	1.33	1.87	3.20	3.20	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	12	14	1.26	1.77	3.03	3.54	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	12	18	1.14	1.60	2.74	4.11	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	12	24	1.00	1.40	2.40	4.80	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	14	14	1.20	1.68	3.36	3.36	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	14	18	1.09	1.53	3.05	3.93	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	7	18	18	1.00	1.40	3.60	3.60	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	9	9	1.50	2.70	2.70	2.70	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	9	12	1.37	2.47	2.47	3.29	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	9	14	1.30	2.34	2.34	3.63	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	9	18	1.17	2.11	2.11	4.21	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	12	12	1.26	2.27	3.03	3.03	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	12	14	1.20	2.16	2.88	3.36	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	12	18	1.09	1.96	2.62	3.93	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	14	14	1.14	2.06	3.20	3.20	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	9	14	18	1.04	1.88	2.92	3.76	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	12	12	12	1.17	2.81	2.81	2.81	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	12	12	14	1.12	2.68	2.68	3.13	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	12	12	18	1.02	2.45	2.45	3.68	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	12	14	14	1.07	2.56	2.99	2.99	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	12	14	18	0.98	2.35	2.74	3.53	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	5	14	14	14	1.02	2.86	2.86	2.86	9.60 (3.00-11.20)	2.19 (0.30-3.03)	4.38	6.5	4.3	A+
	7	7	7	7	2.40	2.40	2.40	2.40	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	7	9	2.24	2.24	2.24	2.88	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	7	12	2.04	2.04	2.04	3.48	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	7	14	1.92	1.92	1.92	3.84	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	7	18	1.72	1.72	1.72	4.44	9.60(3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	9	9	2.10	2.10	2.70	2.70	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	9	12	1.92	1.92	2.47	3.29	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	9	14	1.82	1.82	2.34	3.62	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	9	18	1.64	1.64	2.11	4.21	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	12	12	1.77	1.77	3.03	3.03	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	12	14	1.68	1.68	2.88	3.36	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	12	18	1.53	1.53	2.62	3.92	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	14	14	1.60	1.60	3.20	3.20	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	7	14	18	1.46	1.46	2.92	3.76	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	9	9	1.98	2.54	2.54	2.54	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	9	12	1.81	2.34	2.34	3.11	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	9	14	1.71	2.22	2.22	3.45	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	9	18	1.56	2.01	2.01	4.02	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	12	12	1.68	2.16	2.88	2.88	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	12	14	1.60	2.06	2.74	3.20	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	12	18	1.46	1.88	2.50	3.76	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	14	14	1.54	1.96	3.05	3.05	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	9	14	18	1.40	1.80	2.80	3.60	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	12	12	12	1.56	2.68	2.68	2.68	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
	7	12	12	14	1.49	2.56	2.56	2.99	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++
7	12	12	18	1.37	2.35	2.35	3.53	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6.5	4.6	A++	
7	12	14	14	1.43	2.45	2.86	2.86	9.60 (3.0-11.2)	2.11 (0.30-2.95)	4.55	6			

5-unit Multi-split Combination Table-cooling

5-unit Multi-split cooling

AOEG36KBTAS	Combination of Indoor Units					Cooling Operation										Seasonal Data		
						Cooling Capacity					Input Power (Min. - Max.)	EER						
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5			Total Capacity (Min. - Max.)	Power (Min. - Max.)				
2-unit connection	5	22	-	-	-	1.50	6.00	-	-	-	7.50 (3.00-9.60)	1.70 (0.30-2.84)	4.42	7.5	6.1	A++		
	5	24	-	-	-	1.50	7.00	-	-	-	8.50 (3.00-10.30)	2.19 (0.30-3.13)	3.88	8.5	6.0	A+		
	7	24	-	-	-	2.00	7.00	-	-	-	9.00 (3.00-11.0)	2.91 (0.30-3.45)	3.09	9.0	7.9	A++		
	9	22	-	-	-	2.50	6.00	-	-	-	8.50 (3.00-11.0)	2.67 (0.30-3.45)	3.18	8.5	7.9	A++		
	9	24	-	-	-	2.50	7.00	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	12	22	-	-	-	3.50	6.00	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	12	24	-	-	-	3.17	6.33	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	14	22	-	-	-	3.69	5.81	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	14	24	-	-	-	3.50	6.00	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	18	18	-	-	-	4.75	4.75	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	18	22	-	-	-	4.27	5.23	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	18	24	-	-	-	4.07	5.43	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	22	22	-	-	-	4.75	4.75	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	22	24	-	-	-	4.54	4.96	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	24	24	-	-	-	4.75	4.75	-	-	-	9.50 (3.00-11.0)	3.17 (0.30-3.45)	3.00	9.5	7.8	A++		
	3-unit connection	5	5	18	-	-	1.43	1.43	5.14	-	-	8.00 (3.00-9.70)	2.36 (0.30-2.98)	3.38	8.0	6.3	A++	
5		5	22	-	-	1.41	1.41	6.19	-	-	9.00 (3.00-11.00)	2.69 (0.30-3.46)	3.35	9.0	6.2	A++		
5		5	24	-	-	1.40	1.40	6.71	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		7	18	-	-	1.42	1.98	5.10	-	-	8.50 (3.00-10.40)	2.61 (0.30-3.28)	3.26	8.5	6.2	A++		
5		7	22	-	-	1.40	1.96	6.15	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		7	24	-	-	1.32	1.85	6.33	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		9	14	-	-	1.43	2.57	4.00	-	-	8.00 (3.00-10.00)	2.36 (0.30-2.98)	3.38	8.0	6.3	A++		
5		9	18	-	-	1.41	2.53	5.06	-	-	9.00 (3.00-11.00)	2.69 (0.30-3.46)	3.35	9.0	6.2	A++		
5		9	22	-	-	1.32	2.38	5.81	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		9	24	-	-	1.25	2.25	6.00	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		12	12	-	-	1.38	3.31	3.31	-	-	8.00 (3.00-10.40)	2.47 (0.30-3.13)	3.23	8.5	6.2	A++		
5		12	14	-	-	1.45	3.48	4.06	-	-	9.00 (3.00-11.00)	2.69 (0.30-3.46)	3.35	9.0	6.2	A++		
5		12	18	-	-	1.36	3.26	4.89	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		12	22	-	-	1.22	2.92	5.36	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		12	24	-	-	1.16	2.78	5.56	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		14	14	-	-	1.44	4.03	4.03	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		14	18	-	-	1.28	3.59	4.62	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		14	22	-	-	1.16	3.24	5.10	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		14	24	-	-	1.10	3.09	5.30	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		18	18	-	-	1.16	4.17	4.17	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		18	22	-	-	1.06	3.80	4.64	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		18	24	-	-	1.01	3.64	4.85	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		22	22	-	-	0.97	4.27	4.27	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		22	24	-	-	0.93	4.10	4.47	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.26	9.5	6.1	A++		
5		24	24	-	-	0.90	4.30	4.30	-	-	9.50 (3.00-11.00)	2.92 (0.30-3.46)	3.25	9.5	6.1	A++		
7		7	14	-	-	2.00	2.00	4.00	-	-	8.00 (3.00-10.0)	2.26 (0.30-2.88)	3.54	8.0	8.2	A++		
7		7	18	-	-	2.00	2.00	5.00	-	-	9.00 (3.00-11.0)	2.68 (0.30-3.45)	3.36	9.0	8.1	A++		
7		7	22	-	-	1.85	1.85	5.80	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		7	24	-	-	1.75	1.75	6.00	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		9	12	-	-	2.00	2.50	3.50	-	-	8.00 (3.00-10.0)	2.26 (0.30-2.88)	3.54	8.0	8.2	A++		
7		9	14	-	-	2.00	2.50	4.00	-	-	8.50 (3.00-10.7)	2.46 (0.30-3.27)	3.45	8.5	8.1	A++		
7		9	18	-	-	2.00	2.50	5.00	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		9	22	-	-	1.75	2.25	5.50	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		9	24	-	-	1.66	2.14	5.70	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		12	12	-	-	2.00	3.50	3.50	-	-	9.00 (3.00-11.0)	2.68 (0.30-3.45)	3.36	9.0	8.1	A++		
7		12	14	-	-	2.00	3.50	4.00	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		12	18	-	-	1.80	3.08	4.62	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		12	22	-	-	1.62	2.78	5.10	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		12	24	-	-	1.55	2.65	5.30	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		14	14	-	-	1.90	3.80	3.80	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		14	18	-	-	1.71	3.41	4.38	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		14	22	-	-	1.55	3.09	4.86	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		14	24	-	-	1.47	2.96	5.07	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		18	18	-	-	1.54	3.98	3.98	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		18	22	-	-	1.41	3.64	4.45	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
7		18	24	-	-	1.36	3.49	4.65	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		9	9	-	-	2.50	2.50	2.50	-	-	7.50 (3.00-9.6)	2.07 (0.30-2.70)	3.63	7.5	8.2	A++		
9		9	12	-	-	2.50	2.50	3.50	-	-	8.50 (3.00-10.7)	2.46 (0.30-3.27)	3.45	8.5	8.1	A++		
9		9	14	-	-	2.50	2.50	4.00	-	-	9.00 (3.00-11.0)	2.68 (0.30-3.45)	3.36	9.0	8.1	A++		
9		9	18	-	-	2.38	2.38	4.74	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		9	22	-	-	2.14	2.14	5.22	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		9	24	-	-	2.04	2.04	5.42	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		12	12	-	-	2.50	3.50	3.50	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		12	14	-	-	2.44	3.26	3.80	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		12	18	-	-	2.19	2.92	4.39	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		12	22	-	-	1.99	2.65	4.86	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		12	24	-	-	1.90	2.53	5.07	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		14	14	-	-	2.32	3.59	3.59	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		14	18	-	-	2.09	3.24	4.17	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		14	22	-	-	1.90	2.96	4.64	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		14	24	-	-	1.82	2.83	4.85	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27	9.5	8.0	A++		
9		18	18	-	-	1.90	3.80	3.80	-	-	9.50 (3.00-11.0)	2.91 (0.30-3.45)	3.27					



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

5-unit Multi-split cooling

AOEG36KBTAS	Combination of Indoor Units					Cooling Operation										
						Cooling Capacity					Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	EER	Seasonal Data		
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5				kW	kW	kW
4-unit connection	5	5	12	18	-	1.19	1.19	2.85	4.28	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	12	22	-	1.08	1.08	2.59	4.75	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	12	24	-	1.03	1.03	2.48	4.96	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	14	14	-	1.25	1.25	3.50	3.50	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	14	18	-	1.13	1.13	3.17	4.07	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	14	22	-	1.03	1.03	2.89	4.54	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	14	24	-	0.99	0.99	2.77	4.75	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	18	18	-	1.03	1.03	3.72	3.72	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	18	22	-	0.95	0.95	3.42	4.18	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	5	18	24	-	0.91	0.91	3.29	4.38	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	7	9	-	1.43	2.00	2.00	2.57	-	8.00 (3.00-10.00)	2.21 (0.30-2.98)	3.62	9.0	6.4	A++
	5	7	7	12	-	1.45	2.03	2.03	3.48	-	9.00 (3.00-11.00)	2.50 (0.30-3.46)	3.59	9.5	6.3	A++
	5	7	7	14	-	1.44	2.02	2.02	4.03	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	7	18	-	1.28	1.80	1.80	4.62	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	7	22	-	1.16	1.62	1.62	5.10	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	7	24	-	1.10	1.55	1.55	5.30	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	8.5	6.4	A++
	5	7	9	9	-	1.42	1.98	2.55	2.55	-	8.50 (3.00-10.70)	2.41 (0.30-3.28)	3.53	9.5	6.3	A++
	5	7	9	12	-	1.44	2.02	2.59	3.45	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	9	14	-	1.36	1.90	2.44	3.80	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	9	18	-	1.22	1.71	2.19	4.38	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	9	22	-	1.10	1.55	1.99	4.86	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	9	24	-	1.06	1.48	1.90	5.07	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	12	12	-	1.32	1.85	3.17	3.17	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	12	14	-	1.25	1.75	3.00	3.50	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	12	18	-	1.13	1.58	2.71	4.07	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	12	22	-	1.03	1.45	2.48	4.54	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	12	24	-	0.99	1.39	2.38	4.75	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	14	14	-	1.19	1.66	3.33	3.33	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	14	18	-	1.08	1.51	3.02	3.89	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	14	22	-	0.99	1.39	2.77	4.35	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	14	24	-	0.95	1.33	2.66	4.56	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	18	18	-	0.99	1.39	3.56	3.56	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	18	22	-	0.91	1.28	3.29	4.02	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	7	18	24	-	0.88	1.23	3.17	4.22	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.0	6.4	A++
	5	9	9	9	-	1.41	2.53	2.53	2.53	-	9.00 (3.00-11.00)	2.50 (0.30-3.46)	3.61	9.5	6.3	A++
	5	9	9	12	-	1.36	2.44	2.44	3.26	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	9	14	-	1.28	2.31	2.31	3.59	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	9	18	-	1.16	2.09	2.09	4.17	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	9	22	-	1.06	1.90	1.90	4.64	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	9	24	-	1.01	1.82	1.82	4.85	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	12	12	-	1.25	2.25	3.00	3.00	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	12	14	-	1.19	2.14	2.85	3.33	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	12	18	-	1.08	1.94	2.59	3.89	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	12	22	-	0.99	1.78	2.38	4.35	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	12	24	-	0.95	1.71	2.28	4.56	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	14	14	-	1.13	2.04	3.17	3.17	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	14	18	-	1.03	1.86	2.89	3.72	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	14	22	-	0.95	1.71	2.66	4.18	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	14	24	-	0.91	1.64	2.56	4.38	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
	5	9	18	18	-	0.95	1.71	3.42	3.42	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++
5	9	18	22	-	0.88	1.58	3.17	3.87	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	12	12	-	1.16	2.78	2.78	2.78	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	12	14	-	1.10	2.65	2.65	3.09	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	12	18	-	1.01	2.43	2.43	3.64	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	12	22	-	0.93	2.24	2.24	4.10	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	12	24	-	0.90	2.15	2.15	4.30	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	14	14	-	1.06	2.53	2.96	2.96	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	14	18	-	0.97	2.33	2.71	3.49	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	14	22	-	0.90	2.15	2.51	3.94	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	12	18	18	-	0.90	2.15	3.23	3.23	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	14	14	14	-	1.01	2.83	2.83	2.83	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	9.5	6.3	A++	
5	14	14	18	-	0.93	2.61	2.61	3.35	-	9.50 (3.00-11.00)	2.70 (0.30-3.46)	3.52	8.0	6.5	A++	
7	7	7	7	-	2.00	2.00	2.00	2.00	-	8.00 (3.0-10.0)	2.11 (0.30-2.88)	3.80	8.0	8.5	A+++	
7	7	7	9	-	2.00	2.00	2.00	2.50	-	8.50 (3.0-10.7)	2.29 (0.30-3.27)	3.71	8.5	8.4	A++	
7	7	7	12	-	2.00	2.00	2.00	3.50	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
7	7	7	14	-	1.90	1.90	1.90	3.80	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
7	7	7	18	-	1.71	1.71	1.71	4.37	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
7	7	7	22	-	1.55	1.55	1.55	4.85	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
7	7	7	24	-	1.48	1.48	1.48	5.06	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
7	7	9	9	-	2.00	2.00	2.50	2.50	-							



MULTI-SPLIT

5-unit Multi-split Combination Table-cooling

5-unit Multi-split cooling

AOEG36KBTAS	Combination of Indoor Units					Cooling Operation											
						Cooling Capacity					Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	EER	Seasonal Data			
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5				Pdesign	SEER	Energy efficiency	
4-unit connection	9	9	12	14	-	kW	kW	kW	kW	kW	kW	kW	kW	3.53	9.5	8.3	A++
	9	9	12	18	-	1.78	1.78	2.38	3.56	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	9	12	22	-	1.64	1.64	2.19	4.03	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	9	12	24	-	1.58	1.58	2.11	4.23	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	9	14	14	-	1.86	1.86	2.89	2.89	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	9	14	18	-	1.71	1.71	2.66	3.42	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	9	18	18	-	1.58	1.58	3.17	3.17	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	12	12	-	-	1.91	2.53	2.53	2.53	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	12	12	14	-	1.81	2.43	2.43	2.83	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	12	12	18	-	1.67	2.24	2.24	3.35	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	12	14	14	-	1.74	2.34	2.71	2.71	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	12	14	18	-	1.61	2.15	2.51	3.23	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	9	14	14	-	-	1.67	2.61	2.61	2.61	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	12	12	12	-	-	2.38	2.38	2.38	2.38	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	12	12	12	14	-	2.28	2.28	2.28	2.66	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	12	12	12	18	-	2.11	2.11	2.11	3.17	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	12	12	14	-	-	2.19	2.19	2.56	2.56	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	12	14	14	14	-	2.12	2.46	2.46	2.46	-	9.50 (3.0-11.0)	2.69 (0.30-3.45)	3.53	9.5	8.3	A++	
	5-unit connection	5	5	5	5	7	1.39	1.39	1.39	1.39	1.94	7.50 (3.00-9.60)	1.72 (0.30-2.84)	4.35	8.5	6.6	A++
		5	5	5	5	9	1.38	1.38	1.38	1.38	2.48	8.00 (3.00-10.40)	1.92 (0.30-3.13)	4.17	9.5	6.5	A++
5		5	5	5	12	1.41	1.41	1.41	1.41	3.38	9.00 (3.00-11.00)	2.21 (0.30-3.46)	4.06	9.5	6.5	A++	
5		5	5	5	14	1.40	1.40	1.40	1.40	3.91	9.50 (3.00-11.00)	2.41 (0.30-3.46)	3.94	9.5	6.5	A++	
5		5	5	5	18	1.25	1.25	1.25	1.25	4.50	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	5	22	1.13	1.13	1.13	1.13	4.98	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	5	24	1.08	1.08	1.08	1.08	5.18	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	8.5	6.6	A++	
5		5	5	7	7	1.38	1.38	1.38	1.93	1.93	8.00 (3.00-10.40)	1.92 (0.30-3.13)	4.17	9.0	6.6	A++	
5		5	5	7	9	1.45	1.45	1.45	2.03	2.61	9.00 (3.00-11.00)	2.12 (0.30-3.46)	4.25	9.5	6.5	A++	
5		5	5	7	12	1.40	1.40	1.40	1.96	3.35	9.50 (3.00-11.00)	2.41 (0.30-3.46)	3.94	9.5	6.5	A++	
5		5	5	7	14	1.32	1.32	1.32	1.85	3.69	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	7	18	1.19	1.19	1.19	1.66	4.28	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	7	22	1.08	1.08	1.08	1.51	4.75	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	7	24	1.03	1.03	1.03	1.45	4.96	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	9	9	1.44	1.44	1.44	2.59	2.59	9.50 (3.00-11.00)	2.31 (0.30-3.46)	4.11	9.5	6.5	A++	
5		5	5	9	12	1.32	1.32	1.32	2.38	3.17	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	9	14	1.25	1.25	1.25	2.25	3.50	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	9	18	1.13	1.13	1.13	2.04	4.07	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	9	22	1.03	1.03	1.03	1.86	4.54	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	9	24	0.99	0.99	0.99	1.78	4.75	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	12	12	1.22	1.22	1.22	2.92	2.92	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	12	14	1.16	1.16	1.16	2.78	3.24	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	12	18	1.06	1.06	1.06	2.53	3.80	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	12	22	0.97	0.97	0.97	2.33	4.27	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	12	24	0.93	0.93	0.93	2.24	4.47	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	14	14	1.10	1.10	1.10	3.09	3.09	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	14	18	1.01	1.01	1.01	2.83	3.64	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	14	22	0.93	0.93	0.93	2.61	4.10	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	14	24	0.90	0.90	0.90	2.51	4.30	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	5	18	18	0.93	0.93	0.93	3.35	3.35	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.0	6.6	A++	
5		5	7	7	7	1.45	1.45	2.03	2.03	2.03	9.00 (3.00-11.00)	2.12 (0.30-3.46)	4.25	9.5	6.5	A++	
5		5	7	7	9	1.44	1.44	2.02	2.02	2.59	9.50 (3.00-11.00)	2.31 (0.30-3.46)	4.11	9.5	6.5	A++	
5		5	7	7	12	1.32	1.32	1.85	1.85	3.17	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	7	14	1.25	1.25	1.75	1.75	3.50	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	7	18	1.13	1.13	1.58	1.58	4.07	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	7	22	1.03	1.03	1.45	1.45	4.54	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	7	24	0.99	0.99	1.39	1.39	4.75	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	9	9	1.36	1.36	1.90	2.44	2.44	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	9	12	1.25	1.25	1.75	2.25	3.00	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	9	14	1.19	1.19	1.66	2.14	3.33	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	9	18	1.08	1.08	1.51	1.94	3.89	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	9	22	0.99	0.99	1.39	1.78	4.35	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	9	24	0.95	0.95	1.33	1.71	4.56	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	12	12	1.16	1.16	1.62	2.78	2.78	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	12	14	1.10	1.10	1.55	2.65	3.09	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	12	18	1.01	1.01	1.41	2.43	3.64	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	12	22	0.93	0.93	1.30	2.24	4.10	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	12	24	0.90	0.90	1.25	2.15	4.30	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	14	14	1.06	1.06	1.48	2.96	2.96	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5		5	7	14	18	0.97	0.97	1.36	2.71	3.49	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++	
5	5	7	18	18	0.90	0.90	1.25	2.51	3.94	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	7	18	22	0.90	0.90	1.25	2.33	3.23	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	9	9	1.28	1.28	2.31	2.31	2.46	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	9	12	1.19	1.19	2.14	2.14	2.85	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	9	14	1.13	1.13	2.04	2.04	3.17	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	9	18	1.03	1.03	1.86	1.86	3.72	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	9	22	0.95	0.95	1.71	1.71	4.18	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	9	24	0.91	0.91	1.64	1.64	4.38	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	12	12	1.10	1.10	1.99	2.65	2.65	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	12	14	1.06	1.06	1.90	2.53	2.96	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	12	18	0.97	0.97	1.74	2.33	3.49	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	14	22	0.90	0.90	1.61	2.15	3.94	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	14	14	1.01	1.01	1.82	2.83	2.83	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
5	5	9	14	18	0.93	0.93	1.68	2.61	3.35	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5			



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

5-unit Multi-split cooling

AOEG36KBTAS	Combination of Indoor Units					Cooling Operation										Seasonal Data		
						Cooling Capacity					Input Power (Min. - Max.)	EER	Pdesign					
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5				Total Capacity (Min. - Max.)	kW	kW	kW	kW
5-unit connection	5	7	9	12	18	0.93	1.30	1.68	2.24	3.35	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	7	9	14	14	0.97	1.36	1.74	2.71	2.71	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	7	9	14	18	0.90	1.25	1.61	2.51	3.23	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	7	12	12	12	0.99	1.39	2.38	2.38	2.38	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	7	12	12	14	0.95	1.33	2.28	2.28	2.66	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	7	12	12	18	0.88	1.23	2.11	2.11	3.17	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	7	12	14	14	0.91	1.28	2.19	2.56	2.56	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	7	14	14	14	0.88	1.23	2.46	2.46	2.46	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	9	9	1.16	2.09	2.09	2.09	2.09	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	9	12	1.03	1.86	1.86	1.86	2.59	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	9	14	1.06	1.89	1.86	1.86	3.42	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	9	18	0.95	1.71	1.71	1.71	3.42	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	9	22	0.88	1.58	1.58	1.58	3.87	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	12	12	1.01	1.82	1.82	2.43	2.43	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	12	14	0.97	1.74	1.74	2.33	2.71	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	12	18	0.90	1.61	1.61	2.15	3.23	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	9	14	14	0.93	1.68	1.68	2.61	2.61	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	12	12	12	0.95	1.71	2.28	2.28	2.28	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	12	12	14	0.91	1.64	2.19	2.19	2.56	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	9	12	14	14	0.88	1.58	2.11	2.46	2.46	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	5	12	12	12	12	0.90	2.15	2.15	2.15	2.15	9.50 (3.00-11.00)	2.51 (0.30-3.46)	3.78	9.5	6.5	A++		
	7	7	7	7	7	1.90	1.90	1.90	1.90	1.90	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	7	9	1.80	1.80	1.80	1.80	2.30	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	7	12	1.66	1.66	1.66	1.66	2.86	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	7	14	1.58	1.58	1.58	1.58	3.18	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	7	18	1.45	1.45	1.45	1.45	3.70	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	7	22**	1.33	1.33	1.33	1.33	4.18	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	7	24	1.28	1.28	1.28	1.28	4.38	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	9	9	1.70	1.70	1.70	2.20	2.20	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	9	12	1.58	1.58	1.58	2.04	2.72	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	9	14	1.51	1.51	1.51	1.94	3.03	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	9	18	1.39	1.39	1.39	1.77	3.56	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	9	22**	1.28	1.28	1.28	1.64	4.02	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	9	24	1.23	1.23	1.23	1.58	4.23	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	12	12	1.48	1.48	1.48	2.53	2.53	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	12	14	1.41	1.41	1.41	2.43	2.84	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	12	18	1.30	1.30	1.30	2.24	3.36	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	14	14	1.36	1.36	1.36	2.71	2.71	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	7	14	18	1.25	1.25	1.25	2.51	3.24	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	9	9	1.63	1.63	2.08	2.08	2.08	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	9	12	1.51	1.51	1.94	1.94	2.60	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	9	14	1.45	1.45	1.86	1.86	2.88	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	9	18	1.33	1.33	1.71	1.71	3.42	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	9	22**	1.23	1.23	1.58	1.58	3.88	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	12	12	1.41	1.41	1.82	2.43	2.43	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	12	14	1.36	1.36	1.74	2.33	2.71	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	12	18	1.25	1.25	1.61	2.15	3.24	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	9	14	14	1.30	1.30	1.68	2.61	2.61	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	12	12	12	1.33	1.33	2.28	2.28	2.28	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	12	12	14	1.28	1.28	2.19	2.19	2.56	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	7	12	14	14	1.23	1.23	2.12	2.46	2.46	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	9	9	9	1.54	1.99	1.99	1.99	1.99	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	9	9	12	1.44	1.86	1.86	1.86	2.48	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	9	9	14	1.39	1.78	1.78	1.78	2.77	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	9	9	18	1.28	1.64	1.64	1.64	3.30	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	9	12	12	1.36	1.74	1.74	2.33	2.33	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	9	12	14	1.29	1.68	1.68	2.24	2.61	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	9	14	14	1.26	1.61	1.61	2.51	2.51	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	12	12	12	1.28	1.65	2.19	2.19	2.19	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	7	9	12	12	14	1.23	1.58	2.11	2.11	2.47	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	9	9	9	9	9	1.90	1.90	1.90	1.90	1.90	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	9	9	9	9	12	1.78	1.78	1.78	1.78	2.38	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	9	9	9	9	14	1.71	1.71	1.71	1.71	2.66	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	9	9	9	9	18	1.58	1.58	1.58	1.58	3.18	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	9	9	9	12	12	1.68	1.68	1.68	2.23	2.23	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	9	9	9	12	14	1.61	1.61	1.61	2.15	2.52	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		
	9	9	12	12	12	1.57	1.57	2.12	2.12	2.12	9.50 (3.0-11.0)	2.50 (0.30-3.45)	3.80	9.5	8.5	A+++		

Notes: •5: 5000 Btu/h/7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h/18: 18000 Btu/h/22: 22000 Btu/h/24: 24000 Btu/h models

•The above specifications are listed with the best combination of values selected.

•2 or more indoor units should be connected.

•Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.

•For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1

*1: For Model 22, only wall-mounted indoor units are connectable.



MULTI-SPLIT

5-unit Multi-split Combination Table-Heating

5-unit Multi-split heating

AOEG36KBTA5	Combination of Indoor Units					Heating Operation										Seasonal Data		
						Heating Capacity					Input Power (Min. - Max.)	COP						
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5			Total Capacity (Min. - Max.)	Min. - Max.				
2-unit connection	5	22	-	-	-	1.67	7.33	-	-	-	9.00 (3.50-10.80)	2.28 (0.25-2.84)	3.94	6.0	4.1	A++		
	5	24	-	-	-	1.66	7.94	-	-	-	9.60 (3.50-11.60)	2.41 (0.25-3.12)	3.98	6.8	4.0	A+		
	7	24	-	-	-	2.39	8.21	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	9	22	-	-	-	3.00	7.20	-	-	-	10.20 (3.5-12.0)	2.52 (0.25-3.25)	4.04	6.8	4.3	A+		
	9	24	-	-	-	2.89	7.71	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	12	22	-	-	-	3.74	6.86	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	12	24	-	-	-	3.53	7.07	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	14	22	-	-	-	4.12	6.48	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	14	24	-	-	-	3.91	6.69	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	18	18	-	-	-	5.30	5.30	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	18	22	-	-	-	4.77	5.83	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	18	24	-	-	-	4.54	6.06	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	22	22	-	-	-	5.30	5.30	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	22	24	-	-	-	5.07	5.53	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	24	24	-	-	-	5.30	5.30	-	-	-	10.60 (3.5-12.0)	2.65 (0.25-3.25)	4.00	7.0	4.3	A+		
	3-unit connection	5	5	18	-	-	1.71	1.71	6.17	-	-	9.60 (3.50-10.90)	2.34 (0.25-2.96)	4.10	6.5	4.2	A++	
5		5	22	-	-	1.66	1.66	7.29	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		5	24	-	-	1.56	1.56	7.48	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		7	18	-	-	1.70	2.38	6.12	-	-	10.20 (3.50-11.60)	2.43 (0.25-3.26)	4.19	6.8	4.1	A++		
5		7	22	-	-	1.56	2.18	6.86	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		7	24	-	-	1.47	2.06	7.07	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		9	14	-	-	1.71	3.09	4.80	-	-	9.60 (3.50-11.20)	2.34 (0.25-2.96)	4.10	6.5	4.2	A++		
5		9	18	-	-	1.66	2.98	5.96	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		9	22	-	-	1.47	2.65	6.48	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		9	24	-	-	1.39	2.51	6.69	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		12	12	-	-	1.71	4.10	4.10	-	-	9.90 (3.50-11.60)	2.41 (0.25-3.12)	4.11	6.8	4.1	A++		
5		12	14	-	-	1.71	4.10	4.79	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		12	18	-	-	1.51	3.63	5.45	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		12	22	-	-	1.36	3.26	5.98	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		12	24	-	-	1.29	3.10	6.20	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		14	14	-	-	1.61	4.50	4.50	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		14	18	-	-	1.43	4.01	5.16	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		14	22	-	-	1.29	3.62	5.69	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		14	24	-	-	1.23	3.45	5.92	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		18	18	-	-	1.29	4.65	4.65	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		18	22	-	-	1.18	4.24	5.18	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		18	24	-	-	1.13	4.06	5.41	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		22	22	-	-	1.08	4.76	4.76	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		22	24	-	-	1.04	4.57	4.99	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
5		24	24	-	-	1.00	4.80	4.80	-	-	10.60 (3.50-12.00)	2.55 (0.25-3.26)	4.16	7.0	4.1	A++		
7		7	14	-	-	2.40	2.40	4.80	-	-	9.60 (3.5-11.2)	2.25 (0.25-2.87)	4.26	6.5	4.5	A+		
7		7	18	-	-	2.32	2.32	5.96	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		7	22	-	-	2.06	2.06	6.48	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		7	24	-	-	1.95	1.95	6.70	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		9	12	-	-	2.40	3.00	4.20	-	-	9.60 (3.5-11.2)	2.25 (0.25-2.87)	4.26	6.5	4.5	A+		
7		9	14	-	-	2.40	3.00	4.80	-	-	10.20 (3.5-12.0)	2.42 (0.25-3.25)	4.21	6.8	4.4	A+		
7		9	18	-	-	2.18	2.81	5.61	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		9	22	-	-	1.95	2.51	6.14	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		9	24	-	-	1.85	2.39	6.36	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		12	12	-	-	2.40	4.10	4.10	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		12	14	-	-	2.25	3.85	4.50	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		12	18	-	-	2.00	3.44	5.16	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		12	22	-	-	1.81	3.10	5.69	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		12	24	-	-	1.72	2.96	5.92	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7		14	14	-	-	2.12	4.24	4.24	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+		
7	14	18	-	-	1.90	3.81	4.89	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
7	14	22	-	-	1.73	3.45	5.42	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
7	14	24	-	-	1.65	3.30	5.65	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
7	18	18	-	-	1.72	4.44	4.44	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
7	18	22	-	-	1.58	4.06	4.96	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
7	18	24	-	-	1.51	3.89	5.20	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	9	9	-	-	3.00	3.00	3.00	-	-	9.00 (3.5-10.8)	2.09 (0.25-2.70)	4.31	6.0	4.5	A+			
9	9	12	-	-	3.00	3.00	4.20	-	-	10.20 (3.5-12.0)	2.42 (0.25-3.25)	4.21	6.8	4.4	A+			
9	9	14	-	-	2.98	2.98	4.64	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	9	18	-	-	2.65	2.65	5.30	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	9	22	-	-	2.39	2.39	5.82	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	9	24	-	-	2.27	2.27	6.06	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	12	12	-	-	2.90	3.85	3.85	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	12	14	-	-	2.73	3.63	4.24	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	12	18	-	-	2.45	3.26	4.89	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	12	22	-	-	2.22	2.96	5.42	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	12	24	-	-	2.12	2.83	5.65	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	14	14	-	-	2.58	4.01	4.01	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	14	18	-	-	2.33	3.62	4.65	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	14	22	-	-	2.12	3.30	5.18	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	14	24	-	-	2.03	3.16	5.41	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	18	18	-	-	2.12	4.24	4.24	-	-	10.60 (3.5-12.0)	2.54 (0.25-3.25)	4.18	7.0	4.4	A+			
9	18	22	-	-	1.95	3.												



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

5-unit Multi-split heating

AOEG36KBTAS	Combination of Indoor Units					Heating Operation											Seasonal Data		
						Heating Capacity					Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	COP						
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5									
						kW	kW	kW	kW	kW		kW		kW	kW				
4-unit connection	5	5	12	18	-	1.33	1.33	3.18	4.77	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	12	22	-	1.20	1.20	2.89	5.30	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	12	24	-	1.15	1.15	2.77	5.53	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	14	14	-	1.39	1.39	3.91	3.91	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	14	18	-	1.26	1.26	3.53	4.54	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	14	22	-	1.15	1.15	3.23	5.07	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	14	24	-	1.10	1.10	3.09	5.30	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	18	18	-	1.15	1.15	4.15	4.15	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	18	22	-	1.06	1.06	3.82	4.66	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	5	18	24	-	1.02	1.02	3.67	4.89	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	7	9	-	1.71	2.40	2.40	3.09	-	9.60 (3.50-11.20)	2.26 (0.25-2.96)	4.25	7.0	4.2	A++			
	5	7	7	12	-	1.71	2.39	2.39	4.10	-	10.60 (3.50-12.00)	2.40 (0.25-3.26)	4.41	7.0	4.2	A++			
	5	7	7	14	-	1.61	2.25	2.25	4.50	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	7	18	-	1.43	2.01	2.01	5.16	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	7	22	-	1.29	1.81	1.81	5.69	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	7	24	-	1.23	1.73	1.73	5.92	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	6.8	4.2	A++			
	5	7	9	9	-	1.70	2.38	3.06	3.06	-	10.20 (3.50-12.00)	2.34 (0.25-3.26)	4.35	7.0	4.2	A++			
	5	7	9	12	-	1.61	2.25	2.89	3.85	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	9	14	-	1.51	2.12	2.73	4.24	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	9	18	-	1.36	1.90	2.45	4.89	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	9	22	-	1.23	1.73	2.22	5.42	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	9	24	-	1.18	1.65	2.12	5.65	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	12	12	-	1.47	2.06	3.53	3.53	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	12	14	-	1.39	1.95	3.35	3.91	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	12	18	-	1.26	1.77	3.03	4.54	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	12	22	-	1.15	1.61	2.77	5.07	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	12	24	-	1.10	1.55	2.65	5.30	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	14	14	-	1.33	1.86	3.71	3.71	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	14	18	-	1.20	1.69	3.37	4.34	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	14	22	-	1.10	1.55	3.09	4.86	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	14	24	-	1.06	1.48	2.97	5.09	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	18	18	-	1.10	1.55	3.98	3.98	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	18	22	-	1.02	1.43	3.67	4.48	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	7	18	24	-	0.98	1.37	3.53	4.71	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	9	9	-	1.66	2.98	2.98	2.98	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	9	12	-	1.51	2.73	2.73	3.63	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	9	14	-	1.43	2.58	2.58	4.01	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	9	18	-	1.29	2.33	2.33	4.65	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	9	22	-	1.18	2.12	2.12	5.18	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	9	24	-	1.13	2.03	2.03	5.41	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	12	12	-	1.39	2.51	3.35	3.35	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	12	14	-	1.33	2.39	3.18	3.71	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	12	18	-	1.20	2.17	2.89	4.34	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	12	22	-	1.10	1.99	2.65	4.86	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	12	24	-	1.06	1.91	2.54	5.09	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	14	14	-	1.26	2.27	3.53	3.53	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	14	18	-	1.15	2.07	3.23	4.15	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	14	22	-	1.06	1.91	2.97	4.66	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	14	24	-	1.02	1.83	2.85	4.89	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
	5	9	18	18	-	1.06	1.91	3.82	3.82	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++			
5	9	18	22	-	0.98	1.77	3.53	4.32	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	12	12	-	1.29	3.10	3.10	3.10	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	12	14	-	1.23	2.96	2.96	3.45	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	12	18	-	1.13	2.71	2.71	4.06	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	12	22	-	1.04	2.49	2.49	4.57	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	12	24	-	1.00	2.40	2.40	4.80	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	14	14	-	1.18	2.83	3.30	3.30	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	14	18	-	1.08	2.60	3.03	3.89	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	14	22	-	1.00	2.40	2.80	4.40	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	12	18	18	-	1.00	2.40	3.60	3.60	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	14	14	14	-	1.13	3.16	3.16	3.16	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	7.0	4.2	A++				
5	14	14	18	-	1.04	2.91	2.91	3.74	-	10.60 (3.50-12.00)	2.45 (0.25-3.26)	4.32	6.5	4.3	A++				
7	7	7	7	-	2.40	2.40	2.40	2.40	-	9.60 (3.5-11.2)	2.17 (0.25-2.87)	4.42	6.5	4.6	A++				
7	7	7	9	-	2.40	2.40	2.40	3.00	-	10.20 (3.5-12.0)	2.33 (0.25-3.25)	4.37	6.8	4.5	A+				
7	7	7	12	-	2.25	2.25	2.25	3.85	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+				
7	7	7	14	-	2.12	2.12	2.12	4.24	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+				
7	7	7	18	-	1.90	1.90	1.90	4.90	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+				
7	7	7	22	-	1.73	1.73	1.73	5.41	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+				
7	7	7	24	-	1.65	1.65	1.65	5.65	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0						



MULTI-SPLIT

5-unit Multi-split Combination Table-Heating

5-unit Multi-split heating

AOEG36KBTAS	Combination of Indoor Units					Heating Operation										Seasonal Data		
						Heating Capacity					Total Capacity (Min. - Max.)	Input Power (Min. - Max.)	COP					
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5				kW	kW			
4-unit connection	9	9	12	14	-	2.17	2.17	2.89	3.37	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	9	12	18	-	1.99	1.99	2.64	3.98	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	9	12	22	-	1.83	1.83	2.45	4.49	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	9	12	24	-	1.77	1.77	2.35	4.71	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	9	14	14	-	2.07	2.07	3.23	3.23	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	9	14	18	-	1.91	1.91	2.96	3.82	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	9	18	18	-	1.77	1.77	3.53	3.53	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	12	12	12	-	2.11	2.83	2.83	2.83	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	12	12	14	-	2.02	2.71	2.71	3.16	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	12	12	18	-	1.87	2.49	2.49	3.75	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	12	14	14	-	1.94	2.60	3.03	3.03	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	12	14	18	-	1.80	2.40	2.80	3.60	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	9	14	14	14	-	1.87	2.91	2.91	2.91	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	12	12	12	12	-	2.65	2.65	2.65	2.65	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	12	12	12	14	-	2.54	2.54	2.54	2.98	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	12	12	12	18	-	2.36	2.36	2.36	3.52	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	12	12	14	14	-	2.45	2.45	2.85	2.85	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
	12	14	14	14	-	2.35	2.75	2.75	2.75	-	10.60 (3.5-12.0)	2.44 (0.25-3.25)	4.34	7.0	4.5	A+		
5-unit connection	5	5	5	5	7	1.39	1.39	1.39	1.39	1.94	7.50 (3.50-10.80)	1.98 (0.25-2.84)	3.78	6.8	4.3	A++		
	5	5	5	5	9	1.38	1.38	1.38	1.38	2.48	8.00 (3.50-11.60)	2.08 (0.25-3.12)	3.85	7.0	4.3	A++		
	5	5	5	5	12	1.41	1.41	1.41	1.41	3.38	9.00 (3.50-12.00)	2.37 (0.25-3.26)	3.80	7.0	4.3	A++		
	5	5	5	5	14	1.40	1.40	1.40	1.40	3.91	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	5	18	1.25	1.25	1.25	1.25	4.50	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	5	22	1.13	1.13	1.13	1.13	4.98	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	5	24	1.08	1.08	1.08	1.08	5.18	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	6.8	4.3	A++		
	5	5	5	7	7	1.38	1.38	1.38	1.93	1.93	8.00 (3.50-11.60)	2.08 (0.25-3.12)	3.85	7.0	4.3	A++		
	5	5	5	7	9	1.45	1.45	1.45	2.03	2.61	9.00 (3.50-12.00)	2.18 (0.25-3.26)	4.14	7.0	4.3	A++		
	5	5	5	7	12	1.40	1.40	1.40	1.96	3.35	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	7	14	1.32	1.32	1.32	1.85	3.69	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	7	18	1.19	1.19	1.19	1.66	4.28	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	7	22	1.08	1.08	1.08	1.51	4.75	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	7	24	1.03	1.03	1.03	1.45	4.96	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	9	9	1.44	1.44	1.44	2.59	2.59	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	9	12	1.32	1.32	1.32	2.38	3.17	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	9	14	1.25	1.25	1.25	2.25	3.50	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	9	18	1.13	1.13	1.13	2.04	4.07	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	9	22	1.03	1.03	1.03	1.86	4.54	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	9	24	0.99	0.99	0.99	1.78	4.75	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	12	12	1.22	1.22	1.22	2.92	2.92	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	12	14	1.16	1.16	1.16	2.78	3.24	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	12	18	1.06	1.06	1.06	2.53	3.80	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	12	22	0.97	0.97	0.97	2.33	4.27	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	12	24	0.93	0.93	0.93	2.24	4.47	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	14	14	1.10	1.10	1.10	3.09	3.09	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	14	18	1.01	1.01	1.01	2.83	3.64	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	14	22	0.93	0.93	0.93	2.61	4.10	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	14	24	0.90	0.90	0.90	2.51	4.30	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	5	18	18	0.93	0.93	0.93	3.35	3.35	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.2	A++		
	5	5	7	7	7	1.45	1.45	2.03	2.03	2.03	9.00 (3.50-12.00)	2.18 (0.25-3.26)	4.14	7.0	4.3	A++		
	5	5	7	7	9	1.44	1.44	2.02	2.02	2.59	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	7	12	1.32	1.32	1.85	1.85	3.17	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	7	14	1.25	1.25	1.75	1.75	3.50	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	7	18	1.13	1.13	1.58	1.58	4.07	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	7	22	1.03	1.03	1.45	1.45	4.54	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	7	24	0.99	0.99	1.39	1.39	4.75	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	9	9	1.36	1.36	1.90	2.44	2.44	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	9	12	1.25	1.25	1.75	2.25	3.00	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	9	14	1.19	1.19	1.66	2.14	3.33	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	9	18	1.08	1.08	1.51	1.94	3.89	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	9	22	0.99	0.99	1.39	1.78	4.35	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	9	24	0.95	0.95	1.33	1.71	4.56	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	12	12	1.16	1.16	1.62	2.78	2.78	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	12	14	1.10	1.10	1.55	2.65	3.09	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	12	18	1.01	1.01	1.41	2.43	3.64	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	12	22	0.93	0.93	1.30	2.24	4.10	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	5	7	12	24	0.90	0.90	1.25	2.15	4.30	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
5	5	7	14	14	1.06	1.06	1.48	2.96	2.96	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++			
5	5	7	14	18	0.97	0.97	1.36	2.71	3.49	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++			
5	5	7	14	22	0.90	0.90	1.25	2.51	3.94	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++			
5	5	7	18	18	0.90	0.90	1.25	3.23	3.23	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++			
5	5	9	9	9	1.28	1.28	2.31	2.31	2.31	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++			
5	5	9	9	12	1.19	1.19	2.14	2.14	2.85	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++			
5	5	9	9	14	1.13	1.13	2.04	2.0.										



The data in the table below shows the performance of various combinations of indoor and outdoor units of different capacities, using the most efficient type of indoor unit.
These values should not be interpreted as official declarations for tax incentives or other certifications.
For more information on specific types of indoor and outdoor unit combinations, please refer to the Design & Technical Manual.

5-unit Multi-split heating

AOEG36KBTAS	Combination of Indoor Units					Heating Operation										Seasonal Data		
						Heating Capacity					Input Power (Min. - Max.)		COP	Pdesign				
						Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Total Capacity (Min. - Max.)	kW			kW			
						kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	SCOP	Energy efficiency	
5-unit connection	5	7	9	12	18	0.93	1.30	1.68	2.24	3.35	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	7	9	14	14	0.97	1.36	1.74	2.71	2.71	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	7	9	14	18	0.90	1.25	1.61	2.51	3.23	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	7	12	12	12	0.99	1.39	2.38	2.38	2.38	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	7	12	12	14	0.95	1.33	2.28	2.28	2.66	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	7	12	12	18	0.88	1.23	2.11	2.11	3.17	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	7	12	14	14	0.91	1.28	2.19	2.56	2.56	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	7	14	14	14	0.88	1.23	2.46	2.46	2.46	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	9	9	1.16	2.09	2.09	2.09	2.09	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	9	12	1.08	1.94	1.94	1.94	2.59	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	9	14	1.03	1.86	1.86	1.86	2.89	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	9	18	0.95	1.71	1.71	1.71	3.42	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	9	22	0.88	1.58	1.58	1.58	3.87	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	12	12	1.01	1.82	1.82	2.43	2.43	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	12	14	0.97	1.74	1.74	2.33	2.71	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	12	18	0.90	1.61	1.61	2.15	3.23	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	9	14	14	0.93	1.68	1.68	2.61	2.61	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	12	12	12	0.95	1.71	2.28	2.28	2.28	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	12	12	14	0.91	1.64	2.19	2.19	2.56	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	9	12	14	14	0.88	1.58	2.11	2.46	2.46	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	5	12	12	12	12	0.90	2.15	2.15	2.15	2.15	9.50 (3.50-12.00)	2.37 (0.25-3.26)	4.01	7.0	4.3	A++		
	7	7	7	7	7	2.12	2.12	2.12	2.12	2.12	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	7	9	2.01	2.01	2.01	2.01	2.56	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	7	12	1.86	1.86	1.86	1.86	3.16	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	7	14	1.77	1.77	1.77	1.77	3.52	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	7	18	1.61	1.61	1.61	1.61	4.16	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	7	22	1.48	1.48	1.48	1.48	4.68	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	7	24	1.43	1.43	1.43	1.43	4.88	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	9	9	1.90	1.90	1.90	2.45	2.45	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	9	12	1.77	1.77	1.77	2.26	3.03	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	9	14	1.69	1.69	1.69	2.16	3.37	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	9	18	1.55	1.55	1.55	1.99	3.96	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	9	22	1.43	1.43	1.43	1.83	4.48	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	9	24	1.37	1.37	1.37	1.77	4.72	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	12	12	1.64	1.64	1.64	2.84	2.84	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	12	14	1.58	1.58	1.58	2.70	3.16	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	12	18	1.45	1.45	1.45	2.49	3.76	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	14	14	1.52	1.52	1.52	3.02	3.02	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	7	14	18	1.40	1.40	1.40	2.80	3.60	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	9	9	1.82	1.82	2.32	2.32	2.32	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	9	12	1.69	1.69	2.17	2.17	2.88	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	9	14	1.61	1.61	2.07	2.07	3.24	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	9	18	1.48	1.48	1.91	1.91	3.82	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	9	22	1.37	1.37	1.77	1.77	4.32	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	12	12	1.58	1.58	2.02	2.71	2.71	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	12	14	1.51	1.51	1.95	2.60	3.03	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	12	18	1.40	1.40	1.80	2.40	3.60	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	9	14	14	1.45	1.45	1.88	2.91	2.91	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	12	12	12	1.49	1.49	2.54	2.54	2.54	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
	7	7	12	12	14	1.43	1.43	2.45	2.45	2.84	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++		
7	7	12	14	14	1.37	1.37	2.36	2.75	2.75	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	9	9	9	1.72	2.22	2.22	2.22	2.22	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	9	9	12	1.61	2.07	2.07	2.07	2.78	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	9	9	14	1.54	1.99	1.99	1.99	3.09	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	9	9	18	1.43	1.83	1.83	1.83	3.68	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	9	12	12	1.50	1.95	1.95	2.60	2.60	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	9	12	14	1.45	1.87	1.87	2.49	2.92	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	9	14	14	1.40	1.80	1.80	2.80	2.80	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	12	12	12	1.42	1.83	2.45	2.45	2.45	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
7	9	12	12	14	1.36	1.77	2.36	2.36	2.75	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
9	9	9	9	9	2.12	2.12	2.12	2.12	2.12	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
9	9	9	9	12	1.99	1.99	1.99	1.99	2.64	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
9	9	9	9	14	1.91	1.91	1.91	1.91	2.96	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
9	9	9	9	18	1.77	1.77	1.77	1.77	3.52	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
9	9	9	12	12	1.88	1.88	1.88	2.48	2.48	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
9	9	9	12	14	1.80	1.80	1.80	2.40	2.80	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			
9	9	12	12	12	1.76	1.76	2.36	2.36	2.36	10.60 (3.5-12.0)	2.36 (0.25-3.25)	4.50	7.0	4.6	A++			

Notes: •5: 5000 Btu/h/7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h/18: 18000 Btu/h/22: 22000 Btu/h/24: 24000 Btu/h models

•The above specifications are listed with the best combination of values selected.

•2 or more indoor units should be connected.

•Heating capacity is determined based on 20°CDB (indoor temperature) and 7°CDB/6°CWB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•Total capacity of indoor units connected must be between 7.5 kW and 15.5 kW.

•For compatible Outer Units with 5,000BTU models, please refer to the Design & Technical Manual Part. 1-1

*1: For Model 22, only wall-mounted indoor units are connectable.

6-unit Multi-split Combination Table-cooling

6-unit Multi-split cooling

AOYG45LBA6	Combination of Indoor Units						Cooling Operation							EER		
							Cooling Capacity						Input Power (Min. - Max.)			
							Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Unit 6 kW			Total Capacity (Min. - Max.) kW	
2-unit connection	12	24	-	-	-	-	3.50	7.00	-	-	-	-	10.5 (3.5-11.5)	3.06 (0.8-3.32)	3.43	
	14	24	-	-	-	-	4.00	7.00	-	-	-	-	11.0 (3.5-12.1)	3.28 (0.8-3.70)	3.35	
	18	18	-	-	-	-	5.00	5.00	-	-	-	-	10.0 (3.5-11.5)	2.92 (0.8-3.32)	3.42	
	18	24	-	-	-	-	5.00	7.00	-	-	-	-	12.0 (3.5-13.4)	3.75 (0.8-4.46)	3.20	
	24	24	-	-	-	-	6.25	6.25	-	-	-	-	12.5 (3.5-14.0)	4.01 (0.8-4.84)	3.12	
	7	7	24	-	-	-	2.00	2.00	7.00	-	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45	
	7	9	18	-	-	-	2.00	2.50	5.00	-	-	-	9.5 (3.5-10.8)	2.55 (0.8-2.93)	3.73	
	7	9	24	-	-	-	2.00	2.50	7.00	-	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37	
	7	12	18	-	-	-	2.00	3.50	5.00	-	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48	
	7	12	24	-	-	-	2.00	3.50	6.90	-	-	-	12.4 (3.5-13.7)	3.82 (0.8-4.65)	3.25	
	7	14	14	-	-	-	2.00	4.00	4.00	-	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56	
	7	14	18	-	-	-	2.00	4.00	5.00	-	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41	
	7	14	24	-	-	-	1.94	3.89	6.67	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
	7	18	18	-	-	-	2.00	5.00	5.00	-	-	-	12.0 (3.5-13.7)	3.69 (0.8-4.65)	3.25	
	7	18	24	-	-	-	1.79	4.59	6.12	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23	
	7	24	24	-	-	-	1.60	5.45	5.45	-	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26	
3-unit connection	9	9	18	-	-	-	2.50	2.50	5.00	-	-	-	10.0 (3.5-11.5)	2.84 (0.8-3.32)	3.52	
	9	9	24	-	-	-	2.50	2.50	7.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29	
	9	12	14	-	-	-	2.50	3.50	4.00	-	-	-	10.0 (3.5-11.1)	2.81 (0.8-3.13)	3.56	
	9	12	18	-	-	-	2.50	3.50	5.00	-	-	-	11.0 (3.5-12.4)	3.23 (0.8-3.89)	3.41	
	9	12	24	-	-	-	2.50	3.33	6.67	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
	9	14	14	-	-	-	2.50	4.00	4.00	-	-	-	10.5 (3.5-11.8)	3.02 (0.8-3.51)	3.48	
	9	14	18	-	-	-	2.50	4.00	5.00	-	-	-	11.5 (3.5-13.0)	3.45 (0.8-4.27)	3.33	
	9	14	24	-	-	-	2.40	3.72	6.38	-	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22	
	9	18	18	-	-	-	2.50	5.00	5.00	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
	9	18	24	-	-	-	2.21	4.41	5.88	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24	
	9	24	24	-	-	-	1.98	5.26	5.26	-	-	-	12.5 (3.5-14.0)	3.82 (0.8-4.84)	3.27	
	12	12	12	-	-	-	3.50	3.50	3.50	-	-	-	10.5 (3.5-11.5)	2.98 (0.8-3.32)	3.52	
	12	12	14	-	-	-	3.50	3.50	4.00	-	-	-	11.0 (3.5-12.1)	3.19 (0.8-3.70)	3.45	
	12	12	18	-	-	-	3.50	3.50	5.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29	
	12	12	24	-	-	-	3.13	3.13	6.24	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23	
	12	14	14	-	-	-	3.50	4.00	4.00	-	-	-	11.5 (3.5-12.7)	3.41 (0.8-4.08)	3.37	
	12	14	18	-	-	-	3.50	4.00	5.00	-	-	-	12.5 (3.5-14.0)	3.89 (0.8-4.84)	3.21	
	12	14	24	-	-	-	3.00	3.50	6.00	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24	
	12	18	18	-	-	-	3.12	4.69	4.69	-	-	-	12.5 (3.5-14.0)	3.87 (0.8-4.84)	3.23	
	12	18	24	-	-	-	2.78	4.17	5.55	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
	12	24	24	-	-	-	2.50	5.00	5.00	-	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28	
	14	14	14	-	-	-	4.00	4.00	4.00	-	-	-	12.0 (3.5-13.4)	3.65 (0.8-4.46)	3.29	
	14	14	18	-	-	-	3.80	3.80	4.90	-	-	-	12.5 (3.5-14.0)	3.88 (0.8-4.84)	3.22	
	14	14	24	-	-	-	3.37	3.37	5.76	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
	14	18	18	-	-	-	3.50	4.50	4.50	-	-	-	12.5 (3.5-14.0)	3.86 (0.8-4.84)	3.24	
	14	18	24	-	-	-	3.13	4.02	5.35	-	-	-	12.5 (3.5-14.0)	3.83 (0.8-4.84)	3.26	
	14	24	24	-	-	-	2.82	4.84	4.84	-	-	-	12.5 (3.5-14.0)	3.80 (0.8-4.84)	3.29	
	18	18	18	-	-	-	4.17	4.17	4.17	-	-	-	12.5 (3.5-14.0)	3.85 (0.8-4.84)	3.25	
	18	18	24	-	-	-	3.75	3.75	5.00	-	-	-	12.5 (3.5-14.0)	3.81 (0.8-4.84)	3.28	
	4-unit connection	7	7	7	14	-	-	2.00	2.00	2.00	4.00	-	-	10.0 (3.5-11.1)	2.50 (0.8-3.13)	4.00
		7	7	7	18	-	-	2.00	2.00	2.00	5.00	-	-	11.0 (3.5-12.4)	3.06 (0.8-3.89)	3.59
		7	7	7	24	-	-	1.94	1.94	1.94	6.68	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32
		7	7	9	12	-	-	2.00	2.00	2.50	3.50	-	-	10.0 (3.5-11.1)	2.50 (0.8-3.13)	4.00
		7	7	9	14	-	-	2.00	2.00	2.50	4.00	-	-	10.5 (3.5-11.8)	2.79 (0.8-3.51)	3.76
		7	7	9	18	-	-	2.00	2.00	2.50	5.00	-	-	11.5 (3.5-13.0)	3.33 (0.8-4.27)	3.45
		7	7	9	24	-	-	1.86	1.86	2.39	6.39	-	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33
		7	7	12	12	-	-	2.00	2.00	3.50	3.50	-	-	11.0 (3.5-12.1)	3.00 (0.8-3.70)	3.67
		7	7	12	14	-	-	2.00	2.00	3.50	4.00	-	-	11.5 (3.5-12.7)	3.27 (0.8-4.08)	3.52
		7	7	12	18	-	-	2.00	2.00	3.50	5.00	-	-	12.5 (3.5-14.0)	3.78 (0.8-4.84)	3.31
		7	7	12	24	-	-	1.75	1.75	3.00	6.00	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34
7		7	14	14	-	-	2.00	2.00	4.00	4.00	-	-	12.0 (3.5-13.4)	3.51 (0.8-4.46)	3.42	
7		7	14	18	-	-	1.90	1.90	3.80	4.90	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7		7	14	24	-	-	1.68	1.68	3.37	5.77	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7		7	18	18	-	-	1.75	1.75	4.50	4.50	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7		7	18	24	-	-	1.56	1.56	4.02	5.36	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7		7	24	24	-	-	1.41	1.41	4.84	4.84	-	-	12.5 (3.5-14.0)	3.67 (0.8-4.84)	3.41	
7		9	9	9	-	-	2.00	2.50	2.50	2.50	-	-	9.5 (3.5-10.8)	2.31 (0.8-2.93)	4.11	
7		9	9	12	-	-	2.00	2.50	2.50	3.50	-	-	10.5 (3.5-11.8)	2.79 (0.8-3.51)	3.76	
7		9	9	14	-	-	2.00	2.50	2.50	4.00	-	-	11.0 (3.5-12.4)	3.06 (0.8-3.89)	3.59	
7		9	9	18	-	-	2.00	2.50	2.50	5.00	-	-	12.0 (3.5-13.7)	3.57 (0.8-4.65)	3.36	
7		9	9	24	-	-	1.79	2.30	2.30	6.11	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7		9	12	12	-	-	2.00	2.50	3.50	3.50	-	-	11.5 (3.5-12.7)	3.27 (0.8-4.08)	3.52	
7		9	12	14	-	-	2.00	2.50	3.50	4.00	-	-	12.0 (3.5-13.4)	3.51 (0.8-4.46)	3.42	
7		9	12	18	-	-	1.90	2.45	3.26	4.89	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7		9	12	24	-	-	1.68	2.16	2.88	5.78	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7		9	14	14	-	-	2.00	2.50	4.00	4.00	-	-	12.5 (3.5-14.0)	3.78 (0.8-4.84)	3.31	
7		9	14	18	-	-	1.82	2.34	3.65	4.69	-	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7		9	14	24	-	-	1.62	2.08	3.24	5.56	-	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7		9	18	18	-	-	1.68	2.16	4.33	4.33	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7		9	18	24	-	-	1.51	1.94	3.88	5.17	-	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39	
7		12	12	12	-	-	1.90	3.50	3.50	3.50	-	-	12.4 (3.5-13.7)	3.69 (0.8-4.65)	3.36	
7		12	12	14	-	-	1.94	3.33	3.33	3.90	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32	
7		12	12	18	-	-	1.79	3.06	3.06	4.59	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34	
7		12	12	24	-	-	1.59	2.73	2.73	5.45	-	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37	
7		12	14	14	-	-	1.87	3.19	3.72	3.72	-	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33	
7		12	14	18	-	-	1.72	2.94	3.43	4.41	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35	
7		12	14	24	-	-	1.54	2.63	3.07	5.26	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38	
7		12	18	18	-	-	1.59	2.73	4.09	4.09	-	-				



6-unit Multi-split cooling

AOYG45LBA6	Combination of Indoor Units						Cooling Operation							EER	
							Cooling Capacity						Input Power (Min. - Max.)		
							Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Unit 6 kW			Total Capacity (Min. - Max.) kW
4-unit connection	9	9	9	14	-	-	2.50	2.50	2.50	4.00	-	-	11.5 (3.5-13.0)	3.33 (0.8-4.27)	3.45
	9	9	9	18	-	-	2.50	2.50	2.50	5.00	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32
	9	9	9	24	-	-	2.21	2.21	2.21	5.87	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35
	9	9	12	12	-	-	2.50	2.50	3.50	3.50	-	-	12.0 (3.5-13.4)	3.51 (0.8-4.46)	3.42
	9	9	12	14	-	-	2.50	2.50	3.50	4.00	-	-	12.5 (3.5-14.0)	3.78 (0.8-4.84)	3.31
	9	9	12	18	-	-	2.34	2.34	3.13	4.69	-	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33
	9	9	12	24	-	-	2.08	2.08	2.78	5.56	-	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37
	9	9	14	14	-	-	2.45	2.45	3.80	3.80	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32
	9	9	14	18	-	-	2.25	2.25	3.50	4.50	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34
	9	9	14	24	-	-	2.01	2.01	3.13	5.35	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38
	9	9	18	18	-	-	2.08	2.08	4.17	4.17	-	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37
	9	9	18	24	-	-	1.88	1.88	3.75	4.99	-	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40
	9	12	12	12	-	-	2.51	3.33	3.33	3.33	-	-	12.5 (3.5-14.0)	3.77 (0.8-4.84)	3.32
	9	12	12	14	-	-	2.39	3.19	3.19	3.73	-	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33
	9	12	12	18	-	-	2.21	2.94	2.94	4.41	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35
	9	12	12	24	-	-	1.97	2.63	2.63	5.27	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38
	9	12	14	14	-	-	2.30	3.06	3.57	3.57	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34
	9	12	14	18	-	-	2.12	2.83	3.30	4.25	-	-	12.5 (3.5-14.0)	3.72 (0.8-4.84)	3.36
	9	12	14	24	-	-	1.91	2.54	2.97	5.08	-	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39
	9	12	18	18	-	-	1.97	2.63	3.95	3.95	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38
	9	14	14	14	-	-	2.21	3.43	3.43	3.43	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35
	9	14	14	18	-	-	2.05	3.18	3.18	4.09	-	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37
	9	14	14	24	-	-	1.84	2.87	2.87	4.92	-	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40
	9	14	18	18	-	-	1.91	2.97	3.81	3.81	-	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39
	12	12	12	12	-	-	3.13	3.13	3.13	3.13	-	-	12.5 (3.5-14.0)	3.75 (0.8-4.84)	3.33
	12	12	12	14	-	-	3.00	3.00	3.00	3.50	-	-	12.5 (3.5-14.0)	3.74 (0.8-4.84)	3.34
	12	12	12	18	-	-	2.78	2.78	2.78	4.16	-	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37
	12	12	12	24	-	-	2.50	2.50	2.50	5.00	-	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40
	12	12	14	14	-	-	2.88	2.88	3.37	3.37	-	-	12.5 (3.5-14.0)	3.73 (0.8-4.84)	3.35
	12	12	14	18	-	-	2.68	2.68	3.13	4.01	-	-	12.5 (3.5-14.0)	3.70 (0.8-4.84)	3.38
	12	12	14	24	-	-	2.42	2.42	2.82	4.84	-	-	12.5 (3.5-14.0)	3.67 (0.8-4.84)	3.41
	12	12	18	18	-	-	2.50	2.50	3.75	3.75	-	-	12.5 (3.5-14.0)	3.68 (0.8-4.84)	3.40
	12	14	14	14	-	-	2.78	3.24	3.24	3.24	-	-	12.5 (3.5-14.0)	3.71 (0.8-4.84)	3.37
	12	14	14	18	-	-	2.59	3.02	3.02	3.87	-	-	12.5 (3.5-14.0)	3.69 (0.8-4.84)	3.39
	12	14	18	18	-	-	2.42	2.82	3.63	3.63	-	-	12.5 (3.5-14.0)	3.67 (0.8-4.84)	3.41
5-unit connection	7	7	7	7	7	-	2.00	2.00	2.00	2.00	2.00	10.0 (3.5-11.1)	2.44 (0.8-3.13)	4.10	
	7	7	7	7	9	-	2.00	2.00	2.00	2.00	2.50	10.5 (3.5-11.8)	2.72 (0.8-3.51)	3.86	
	7	7	7	7	12	-	2.00	2.00	2.00	2.00	3.50	11.5 (3.5-12.7)	3.18 (0.8-4.08)	3.62	
	7	7	7	7	14	-	2.00	2.00	2.00	2.00	4.00	12.0 (3.5-13.4)	3.41 (0.8-4.46)	3.52	
	7	7	7	7	18	-	1.90	1.90	1.90	1.90	4.90	12.5 (3.5-14.0)	3.65 (0.8-4.84)	3.42	
	7	7	7	7	24	-	1.68	1.68	1.68	1.68	5.78	12.5 (3.5-14.0)	3.61 (0.8-4.84)	3.46	
	7	7	7	9	9	-	2.00	2.00	2.00	2.50	2.50	11.0 (3.5-12.4)	2.98 (0.8-3.89)	3.69	
	7	7	7	9	12	-	2.00	2.00	2.00	2.50	3.50	12.0 (3.5-13.4)	3.41 (0.8-4.46)	3.52	
	7	7	7	9	14	-	2.00	2.00	2.00	2.50	4.00	12.5 (3.5-14.0)	3.67 (0.8-4.84)	3.41	
	7	7	7	9	18	-	1.82	1.82	1.82	2.34	4.70	12.5 (3.5-14.0)	3.64 (0.8-4.84)	3.43	
	7	7	7	9	24	-	1.62	1.62	1.62	2.08	5.56	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47	
	7	7	7	12	12	-	1.94	1.94	1.94	3.34	3.34	12.5 (3.5-14.0)	3.65 (0.8-4.84)	3.42	
	7	7	7	12	14	-	1.86	1.86	1.86	3.19	3.73	12.5 (3.5-14.0)	3.64 (0.8-4.84)	3.43	
	7	7	7	12	18	-	1.72	1.72	1.72	2.94	4.40	12.5 (3.5-14.0)	3.62 (0.8-4.84)	3.45	
	7	7	7	12	24	-	1.54	1.54	1.54	2.63	5.25	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49	
	7	7	7	14	14	-	1.79	1.79	1.79	3.57	3.57	12.5 (3.5-14.0)	3.63 (0.8-4.84)	3.44	
	7	7	7	14	18	-	1.65	1.65	1.65	3.30	4.25	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47	
	7	7	7	14	24	-	1.48	1.48	1.48	2.97	5.09	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	7	7	7	18	18	-	1.54	1.54	1.54	3.94	3.94	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49	
	7	7	9	9	9	-	2.00	2.00	2.50	2.50	2.50	11.5 (3.5-13.0)	3.24 (0.8-4.27)	3.55	
	7	7	9	9	12	-	2.00	2.00	2.50	2.50	3.50	12.5 (3.5-14.0)	3.67 (0.8-4.84)	3.41	
	7	7	9	9	14	-	1.90	1.90	2.45	2.45	3.80	12.5 (3.5-14.0)	3.65 (0.8-4.84)	3.42	
	7	7	9	9	18	-	1.75	1.75	2.25	2.25	4.50	12.5 (3.5-14.0)	3.62 (0.8-4.84)	3.45	
	7	7	9	9	24	-	1.56	1.56	2.01	2.01	5.36	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48	
	7	7	9	12	12	-	1.86	1.86	2.40	3.19	3.19	12.5 (3.5-14.0)	3.64 (0.8-4.84)	3.43	
	7	7	9	12	14	-	1.79	1.79	2.30	3.06	3.56	12.5 (3.5-14.0)	3.63 (0.8-4.84)	3.44	
	7	7	9	12	18	-	1.65	1.65	2.12	2.83	4.25	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47	
	7	7	9	12	24	-	1.48	1.48	1.91	2.54	5.09	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	7	7	9	14	14	-	1.72	1.72	2.20	3.43	3.43	12.5 (3.5-14.0)	3.62 (0.8-4.84)	3.45	
	7	7	9	14	18	-	1.59	1.59	2.05	3.18	4.09	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48	
	7	7	9	14	24	-	1.43	1.43	1.84	2.87	4.93	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	7	7	9	18	18	-	1.48	1.48	1.92	3.81	3.81	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	7	7	12	12	12	-	1.75	1.75	3.00	3.00	3.00	12.5 (3.5-14.0)	3.62 (0.8-4.84)	3.45	
	7	7	12	12	14	-	1.68	1.68	2.88	2.88	3.38	12.5 (3.5-14.0)	3.61 (0.8-4.84)	3.46	
	7	7	12	12	18	-	1.56	1.56	2.68	2.68	4.02	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48	
	7	7	12	12	24	-	1.41	1.41	2.42	2.42	4.84	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
	7	7	12	14	14	-	1.62	1.62	2.78	3.24	3.24	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47	
	7	7	12	14	18	-	1.51	1.51	2.59	3.02	3.87	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	7	7	12	18	18	-	1.41	1.41	2.42	3.63	3.63	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
	7	7	14	14	14	-	1.56	1.56	3.13	3.13	3.13	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48	
	7	7	14	14	18	-	1.46	1.46	2.92	2.92	3.74	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	7	9	9	9	9	-	2.00	2.50	2.50	2.50	2.50	12.0 (3.5-13.7)	3.47 (0.8-4.65)	3.46	
	7	9	9	9	12	-	1.90	2.45	2.45	2.45	3.25	12.5 (3.5-14.0)	3.65 (0.8-4.84)	3.42	
	7	9	9	9	14	-	1.82	2.34	2.34	2.34	3.66	12.5 (3.5-14.0)	3.64 (0.8-4.84)	3.43	
	7	9	9	9	18	-	1.68	2.16	2.16	2.16	4.34	12.5 (3.5-14.0)	3.61 (0.8-4.84)	3.46	
	7	9	9	9	24	-	1.51	1.94	1.94	1.94	5.17	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	7	9	9	12	12	-	1.78	2.30	2.30	3.06</					



MULTI-SPLIT

6-unit Multi-split Multi Combination Table-cooling/Heating

6-unit Multi-split cooling

AOYG45LBLA6	Combination of Indoor Units						Cooling Operation							Input Power (Min. - Max.)		EER
							Cooling Capacity						Total Capacity (Min. - Max.)			
							Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6		kW		
5-unit connection	7	9	12	14	18	-	1.46	1.88	2.50	2.92	3.74	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	7	9	14	14	14	-	1.50	1.94	3.02	3.02	3.02	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	7	9	14	14	18	-	1.41	1.81	2.82	2.82	3.64	-	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
	7	12	12	12	12	-	1.58	2.73	2.73	2.73	2.73	-	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48	
	7	12	12	12	14	-	1.54	2.63	2.63	2.63	3.07	-	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49	
	7	12	12	12	18	-	1.43	2.46	2.46	2.46	3.69	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	7	12	12	14	14	-	1.48	2.54	2.54	2.97	2.97	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	7	12	14	14	14	-	1.43	2.46	2.87	2.87	2.87	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	9	9	9	9	9	-	2.50	2.50	2.50	2.50	2.50	-	12.5 (3.5-14.0)	3.65 (0.8-4.84)	3.42	
	9	9	9	9	12	-	2.34	2.34	2.34	2.34	3.14	-	12.5 (3.5-14.0)	3.64 (0.8-4.84)	3.43	
	9	9	9	9	14	-	2.25	2.25	2.25	2.25	3.50	-	12.5 (3.5-14.0)	3.62 (0.8-4.84)	3.45	
	9	9	9	9	18	-	2.08	2.08	2.08	2.08	4.18	-	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47	
	9	9	9	9	24	-	1.88	1.88	1.88	1.88	4.98	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	9	9	9	9	12	12	-	2.21	2.21	2.21	2.94	2.94	-	12.5 (3.5-14.0)	3.62 (0.8-4.84)	3.45
	9	9	9	9	12	14	-	2.12	2.12	2.12	2.83	3.31	-	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47
	9	9	9	9	12	18	-	1.97	1.97	1.97	2.63	3.96	-	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49
	9	9	9	9	14	14	-	2.05	2.05	2.05	3.18	3.18	-	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48
	9	9	9	9	14	18	-	1.91	1.91	1.91	2.97	3.80	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50
	9	9	12	12	12	-	2.08	2.08	2.78	2.78	2.78	-	12.5 (3.5-14.0)	3.60 (0.8-4.84)	3.47	
	9	9	12	12	14	-	2.01	2.01	2.68	2.68	3.12	-	12.5 (3.5-14.0)	3.59 (0.8-4.84)	3.48	
	9	9	12	12	18	-	1.88	1.88	2.50	2.50	3.74	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	9	9	12	14	14	-	1.94	1.94	2.58	3.02	3.02	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	9	9	12	14	18	-	1.81	1.81	2.42	2.82	3.64	-	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
	9	9	14	14	14	-	1.87	1.87	2.92	2.92	2.92	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	9	12	12	12	12	-	1.98	2.63	2.63	2.63	2.63	-	12.5 (3.5-14.0)	3.58 (0.8-4.84)	3.49	
	9	12	12	12	14	-	1.91	2.54	2.54	2.54	2.97	-	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50	
	9	12	12	14	14	-	1.84	2.46	2.46	2.87	2.87	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	12	12	12	12	12	-	2.50	2.50	2.50	2.50	2.50	-	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
	12	12	12	12	14	-	2.42	2.42	2.42	2.42	2.82	-	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
	6-unit connection	7	7	7	7	7	7	2.00	2.00	2.00	2.00	2.00	2.00	12.0 (3.5-13.4)	3.32 (0.8-4.46)	3.61
		7	7	7	7	7	9	2.00	2.00	2.00	2.00	2.00	2.50	12.5 (3.5-14.0)	3.57 (0.8-4.84)	3.50
		7	7	7	7	7	12	1.86	1.86	1.86	1.86	1.86	3.20	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52
7		7	7	7	7	14	1.79	1.79	1.79	1.79	1.79	3.55	12.5 (3.5-14.0)	3.54 (0.8-4.84)	3.53	
7		7	7	7	7	18	1.65	1.65	1.65	1.65	1.65	4.25	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7		7	7	7	7	24	1.48	1.48	1.48	1.48	1.48	5.10	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		7	7	7	9	9	1.90	1.90	1.90	1.90	2.45	2.45	12.5 (3.5-14.0)	3.56 (0.8-4.84)	3.51	
7		7	7	7	9	12	1.79	1.79	1.79	1.79	2.29	3.05	12.5 (3.5-14.0)	3.54 (0.8-4.84)	3.53	
7		7	7	7	9	14	1.72	1.72	1.72	1.72	2.20	3.42	12.5 (3.5-14.0)	3.53 (0.8-4.84)	3.54	
7		7	7	7	9	18	1.59	1.59	1.59	1.59	2.05	4.09	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7		7	7	7	9	24	1.43	1.43	1.43	1.43	1.85	4.93	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7		7	7	7	12	12	1.68	1.68	1.68	1.68	2.89	2.89	12.5 (3.5-14.0)	3.52 (0.8-4.84)	3.55	
7		7	7	7	12	14	1.62	1.62	1.62	1.62	2.78	3.24	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7		7	7	7	12	18	1.51	1.51	1.51	1.51	2.59	3.87	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		7	7	7	14	14	1.56	1.56	1.56	1.56	3.13	3.13	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7		7	7	7	14	18	1.46	1.46	1.46	1.46	2.92	3.74	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7		7	7	9	9	9	1.82	1.82	1.82	2.34	2.34	2.34	12.5 (3.5-14.0)	3.55 (0.8-4.84)	3.52	
7		7	7	9	9	12	1.72	1.72	1.72	2.21	2.21	2.92	12.5 (3.5-14.0)	3.53 (0.8-4.84)	3.54	
7		7	7	9	9	14	1.65	1.65	1.65	2.12	2.12	3.31	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7		7	7	9	9	18	1.54	1.54	1.54	1.97	1.97	3.94	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
7		7	7	9	12	12	1.62	1.62	1.62	2.08	2.78	2.78	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7		7	7	9	12	14	1.56	1.56	1.56	2.01	2.68	3.13	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7		7	7	9	12	18	1.46	1.46	1.46	1.88	2.50	3.74	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7		7	7	9	14	14	1.51	1.51	1.51	1.93	3.02	3.02	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		7	7	12	12	12	1.54	1.54	1.54	2.63	2.63	2.63	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
7		7	7	12	12	14	1.48	1.48	1.48	2.54	2.54	2.98	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		7	7	12	14	14	1.43	1.43	1.43	2.47	2.87	2.87	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7		7	9	9	9	9	1.75	1.75	2.25	2.25	2.25	2.25	12.5 (3.5-14.0)	3.53 (0.8-4.84)	3.54	
7		7	9	9	9	12	1.65	1.65	2.12	2.12	2.12	2.84	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
7		7	9	9	9	14	1.59	1.59	2.05	2.05	2.05	3.17	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7		7	9	9	9	18	1.48	1.48	1.91	1.91	1.91	3.81	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		7	9	9	12	12	1.56	1.56	2.01	2.01	2.68	2.68	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7		7	9	9	12	14	1.51	1.51	1.94	1.94	2.59	3.01	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		7	9	9	12	18	1.41	1.41	1.81	1.81	2.42	3.64	12.5 (3.5-14.0)	3.46 (0.8-4.84)	3.61	
7		7	9	9	14	14	1.46	1.46	1.88	1.88	2.91	2.91	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7		7	9	12	12	12	1.48	1.48	1.92	2.54	2.54	2.54	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		7	9	12	12	14	1.43	1.43	1.85	2.46	2.46	2.87	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7		7	12	12	12	12	1.41	1.41	2.42	2.42	2.42	2.42	12.5 (3.5-14.0)	3.46 (0.8-4.84)	3.61	
7		9	9	9	9	9	1.70	2.16	2.16	2.16	2.16	2.16	12.5 (3.5-14.0)	3.52 (0.8-4.84)	3.55	
7		9	9	9	9	12	1.59	2.05	2.05	2.05	2.05	2.71	12.5 (3.5-14.0)	3.50 (0.8-4.84)	3.57	
7		9	9	9	9	14	1.54	1.97	1.97	1.97	1.97	3.08	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
7		9	9	9	12	12	1.50	1.94	1.94	1.94	2.59	2.59	12.5 (3.5-14.0)	3.48 (0.8-4.84)	3.59	
7		9	9	9	12	14	1.46	1.88	1.88	1.88	2.50	2.90	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
7		9	9	12	12	12	1.44	1.84	1.84	2.46	2.46	2.46	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	
9		9	9	9	9	9	2.08	2.08	2.08	2.08	2.08	2.08	12.5 (3.5-14.0)	3.51 (0.8-4.84)	3.56	
9		9	9	9	9	12	1.97	1.97	1.97	1.97	1.97	2.65	12.5 (3.5-14.0)	3.49 (0.8-4.84)	3.58	
9		9	9	9	9	12	1.88	1.88	1.88	1.88	2.49	2.49	12.5 (3.5-14.0)	3.47 (0.8-4.84)	3.60	

Notes: • 7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h/18: 18000 Btu/h/24: 24000 Btu/h models
• The above specifications apply when connected with a wall-mounted unit.
• 2 or more indoor units should be connected.
• Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).
• Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
• Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.



6-unit Multi-split heating

AOYG45LBLA6	Combination of Indoor Units						Heating Operation							COP	
							Heating Capacity						Input Power (Min. - Max.)		
							Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Unit 6 kW			Total Capacity (Min. - Max.) kW
2-unit connection	12	24	-	-	-	-	4.07	8.13	-	-	-	-	12.2 (3.5-13.1)	3.41 (0.7-3.54)	3.58
	14	24	-	-	-	-	4.61	7.89	-	-	-	-	12.5 (3.5-13.8)	3.56 (0.7-3.76)	3.51
	18	18	-	-	-	-	6.10	6.10	-	-	-	-	12.2 (3.5-13.1)	3.41 (0.7-3.54)	3.58
	18	24	-	-	-	-	5.66	7.54	-	-	-	-	13.2 (3.5-15.3)	3.78 (0.7-4.20)	3.49
	24	24	-	-	-	-	6.75	6.75	-	-	-	-	13.5 (3.5-16.0)	3.89 (0.7-4.41)	3.47
3-unit connection	7	7	24	-	-	-	2.30	2.30	7.90	-	-	-	12.5 (3.5-13.8)	3.43 (0.7-3.76)	3.64
	7	9	18	-	-	-	2.35	3.02	6.03	-	-	-	11.4 (3.5-12.4)	2.98 (0.7-3.33)	3.83
	7	9	24	-	-	-	2.24	2.88	7.68	-	-	-	12.8 (3.5-14.5)	3.54 (0.7-3.98)	3.62
	7	12	18	-	-	-	2.33	3.99	5.98	-	-	-	12.3 (3.5-13.5)	3.35 (0.7-3.65)	3.67
	7	12	24	-	-	-	2.17	3.71	7.42	-	-	-	13.3 (3.5-15.6)	3.69 (0.7-4.30)	3.60
	7	14	14	-	-	-	2.40	4.80	4.80	-	-	-	12.0 (3.5-12.7)	3.15 (0.7-3.44)	3.81
	7	14	18	-	-	-	2.28	4.56	5.86	-	-	-	12.7 (3.5-14.2)	3.49 (0.7-3.87)	3.64
	7	14	24	-	-	-	2.10	4.20	7.20	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60
	7	18	18	-	-	-	2.16	5.57	5.57	-	-	-	13.3 (3.5-15.6)	3.69 (0.7-4.30)	3.60
	7	18	24	-	-	-	1.93	4.96	6.61	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61
	7	24	24	-	-	-	1.72	5.89	5.89	-	-	-	13.5 (3.5-16.0)	3.72 (0.7-4.41)	3.63
	9	9	18	-	-	-	3.05	3.05	6.10	-	-	-	12.2 (3.5-13.1)	3.28 (0.7-3.54)	3.72
	9	9	24	-	-	-	2.83	2.83	7.54	-	-	-	13.2 (3.5-15.3)	3.64 (0.7-4.20)	3.63
	9	12	14	-	-	-	3.09	4.11	4.80	-	-	-	12.0 (3.5-12.7)	3.15 (0.7-3.44)	3.81
	9	12	18	-	-	-	2.93	3.91	5.86	-	-	-	12.7 (3.5-14.2)	3.49 (0.7-3.87)	3.64
	9	12	24	-	-	-	2.70	3.60	7.20	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60
	9	14	14	-	-	-	3.00	4.65	4.65	-	-	-	12.3 (3.5-13.5)	3.35 (0.7-3.65)	3.67
	9	14	18	-	-	-	2.85	4.44	5.71	-	-	-	13.0 (3.5-14.9)	3.59 (0.7-4.09)	3.62
	9	14	24	-	-	-	2.59	4.02	6.89	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61
	9	18	18	-	-	-	2.70	5.40	5.40	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60
	9	18	24	-	-	-	2.38	4.76	6.36	-	-	-	13.5 (3.5-16.0)	3.73 (0.7-4.41)	3.62
	9	24	24	-	-	-	2.14	5.68	5.68	-	-	-	13.5 (3.5-16.0)	3.71 (0.7-4.41)	3.64
	12	12	12	-	-	-	4.07	4.07	4.07	-	-	-	12.2 (3.5-13.1)	3.28 (0.7-3.54)	3.72
	12	12	14	-	-	-	3.94	3.95	4.61	-	-	-	12.5 (3.5-13.8)	3.43 (0.7-3.76)	3.64
	12	12	18	-	-	-	3.77	3.77	5.66	-	-	-	13.2 (3.5-15.3)	3.64 (0.7-4.20)	3.63
	12	12	24	-	-	-	3.38	3.38	6.74	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61
	12	14	14	-	-	-	3.84	4.48	4.48	-	-	-	12.8 (3.5-14.5)	3.54 (0.7-3.98)	3.62
	12	14	18	-	-	-	3.68	4.30	5.52	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60
	12	14	24	-	-	-	3.24	3.78	6.48	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61
	12	18	18	-	-	-	3.38	5.06	5.06	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61
	12	18	24	-	-	-	3.00	4.50	6.00	-	-	-	13.5 (3.5-16.0)	3.72 (0.7-4.41)	3.63
	12	24	24	-	-	-	2.70	5.40	5.40	-	-	-	13.5 (3.5-16.0)	3.71 (0.7-4.41)	3.64
	14	14	14	-	-	-	4.40	4.40	4.40	-	-	-	13.2 (3.5-15.3)	3.64 (0.7-4.20)	3.63
	14	14	18	-	-	-	4.11	4.11	5.28	-	-	-	13.5 (3.5-16.0)	3.75 (0.7-4.41)	3.60
	14	14	24	-	-	-	3.63	3.63	6.24	-	-	-	13.5 (3.5-16.0)	3.73 (0.7-4.41)	3.62
	14	18	18	-	-	-	3.78	4.86	4.86	-	-	-	13.5 (3.5-16.0)	3.74 (0.7-4.41)	3.61
	14	18	24	-	-	-	3.38	4.34	5.78	-	-	-	13.5 (3.5-16.0)	3.72 (0.7-4.41)	3.63
	14	24	24	-	-	-	3.04	5.23	5.23	-	-	-	13.5 (3.5-16.0)	3.70 (0.7-4.41)	3.65
	18	18	18	-	-	-	4.50	4.50	4.50	-	-	-	13.5 (3.5-16.0)	3.72 (0.7-4.41)	3.63
	18	18	24	-	-	-	4.05	4.05	5.40	-	-	-	13.5 (3.5-16.0)	3.71 (0.7-4.41)	3.64
4-unit connection	7	7	7	14	-	-	2.40	2.40	2.40	4.80	-	-	12.0 (3.5-12.7)	2.98 (0.7-3.44)	4.03
	7	7	7	18	-	-	2.28	2.28	2.28	5.86	-	-	12.7 (3.5-14.2)	3.35 (0.7-3.87)	3.79
	7	7	7	24	-	-	2.10	2.10	2.10	7.20	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74
	7	7	9	12	-	-	2.40	2.40	3.09	4.11	-	-	12.0 (3.5-12.7)	2.98 (0.7-3.44)	4.03
	7	7	9	14	-	-	2.33	2.33	2.99	4.65	-	-	12.3 (3.5-13.5)	3.19 (0.7-3.65)	3.86
	7	7	9	18	-	-	2.22	2.22	2.85	5.71	-	-	13.0 (3.5-14.9)	3.46 (0.7-4.09)	3.76
	7	7	9	24	-	-	2.01	2.01	2.59	6.89	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	7	7	12	12	-	-	2.30	2.30	3.95	3.95	-	-	12.5 (3.5-13.8)	3.28 (0.7-3.76)	3.81
	7	7	12	14	-	-	2.24	2.24	3.84	4.48	-	-	12.8 (3.5-14.5)	3.41 (0.7-3.98)	3.75
	7	7	12	18	-	-	2.15	2.15	3.68	5.52	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74
	7	7	12	24	-	-	1.89	1.89	3.24	6.48	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	7	7	14	14	-	-	2.20	2.20	4.40	4.40	-	-	13.2 (3.5-15.3)	3.52 (0.7-4.20)	3.75
	7	7	14	18	-	-	2.05	2.05	4.11	5.29	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74
	7	7	14	24	-	-	1.82	1.82	3.63	6.23	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76
	7	7	18	18	-	-	1.89	1.89	4.86	4.86	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	7	7	18	24	-	-	1.69	1.69	4.34	5.78	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77
	7	7	24	24	-	-	1.52	1.52	5.23	5.23	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79
	7	9	9	9	-	-	2.34	3.02	3.02	3.02	-	-	11.4 (3.5-12.4)	2.82 (0.7-3.33)	4.04
	7	9	9	12	-	-	2.33	2.99	2.99	3.99	-	-	12.3 (3.5-13.5)	3.19 (0.7-3.65)	3.86
	7	9	9	14	-	-	2.28	2.93	2.93	4.56	-	-	12.7 (3.5-14.2)	3.35 (0.7-3.87)	3.79
	7	9	9	18	-	-	2.17	2.78	2.78	5.57	-	-	13.3 (3.5-15.6)	3.56 (0.7-4.30)	3.74
	7	9	9	24	-	-	1.93	2.48	2.48	6.61	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	7	9	12	12	-	-	2.24	2.88	3.84	3.84	-	-	12.8 (3.5-14.5)	3.41 (0.7-3.98)	3.75
	7	9	12	14	-	-	2.20	2.83	3.77	4.40	-	-	13.2 (3.5-15.3)	3.52 (0.7-4.20)	3.75
	7	9	12	18	-	-	2.05	2.64	3.52	5.29	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74
	7	9	12	24	-	-	1.82	2.34	3.12	6.22	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76
	7	9	14	14	-	-	2.15	2.75	4.30	4.30	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74
	7	9	14	18	-	-	1.97	2.53	3.94	5.06	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	7	9	14	24	-	-	1.75	2.25	3.50	6.00	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77
	7	9	18	18	-	-	1.82	2.34	4.67	4.67	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76
	7	9	18	24	-	-	1.63	2.09	4.19	5.59	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78
	7	12	12	12	-	-	2.17	3.71	3.71	3.71	-	-	13.3 (3.5-15.6)	3.56 (0.7-4.30)	3.74
	7	12	12	14	-	-	2.10	3.60	3.60	4.20	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74
	7	12	12	18	-	-	1.93	3.31	3.31	4.95	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	7	12	12	24	-	-	1.72	2.95	2.95	5.88	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77
	7	12	14	14	-	-	2.01	3.45	4.02	4.02	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75
	7	12	14	18	-	-	1.85	3.18	3.71	4.76	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76
	7	12	14	24	-	-	1.66	2.84	3.32	5.68	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78
	7	12	18	18	-	-	1.72	2.94	4.42	4.42	-	-	13.		



MULTI-SPLIT

6-unit Multi-split Combination Table-Heating

6-unit Multi-split heating

AOYG45LBLA6	Combination of Indoor Units						Heating Operation							COP		
							Heating Capacity						Input Power (Min. - Max.)			
							Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Unit 6 kW			Total Capacity (Min. - Max.) kW	
4-unit connection	9	9	9	14	-	-	2.85	2.85	2.85	4.45	-	-	13.0 (3.5-14.9)	3.46 (0.7-4.09)	3.76	
	9	9	9	18	-	-	2.70	2.70	2.70	5.40	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74	
	9	9	9	24	-	-	2.38	2.38	2.38	6.36	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76	
	9	9	12	12	-	-	2.83	2.83	3.77	3.77	-	-	13.2 (3.5-15.3)	3.52 (0.7-4.20)	3.75	
	9	9	12	14	-	-	2.76	2.76	3.68	4.30	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74	
	9	9	12	18	-	-	2.53	2.53	3.38	5.06	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75	
	9	9	12	24	-	-	2.25	2.25	3.00	6.00	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77	
	9	9	14	14	-	-	2.64	2.64	4.11	4.11	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74	
	9	9	14	18	-	-	2.43	2.43	3.78	4.86	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75	
	9	9	14	24	-	-	2.17	2.17	3.38	5.78	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77	
	9	9	18	18	-	-	2.25	2.25	4.50	4.50	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77	
	9	9	18	24	-	-	2.03	2.03	4.05	5.39	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	9	12	12	12	-	-	2.70	3.60	3.60	3.60	-	-	13.5 (3.5-16.0)	3.61 (0.7-4.41)	3.74	
	9	12	12	14	-	-	2.59	3.45	3.45	4.01	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75	
	9	12	12	18	-	-	2.38	3.18	3.18	4.76	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76	
	9	12	12	24	-	-	2.13	2.84	2.84	5.69	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	9	12	14	14	-	-	2.48	3.30	3.86	3.86	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75	
	9	12	14	18	-	-	2.29	3.06	3.57	4.58	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76	
	9	12	14	24	-	-	2.06	2.75	3.20	5.49	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	9	12	18	18	-	-	2.13	2.85	4.26	4.26	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	9	14	14	14	-	-	2.37	3.71	3.71	3.71	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76	
	9	14	14	18	-	-	2.21	3.44	3.44	4.41	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77	
	9	14	14	24	-	-	1.99	3.10	3.10	5.31	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79	
	9	14	18	18	-	-	2.06	3.20	4.12	4.12	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	12	12	12	12	-	-	3.38	3.38	3.38	3.38	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75	
	12	12	12	14	-	-	3.24	3.24	3.24	3.78	-	-	13.5 (3.5-16.0)	3.60 (0.7-4.41)	3.75	
	12	12	12	18	-	-	3.00	3.00	3.00	4.50	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77	
	12	12	12	24	-	-	2.70	2.70	2.70	5.40	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	12	12	14	14	-	-	3.12	3.12	3.63	3.63	-	-	13.5 (3.5-16.0)	3.59 (0.7-4.41)	3.76	
	12	12	14	18	-	-	2.89	2.89	3.38	4.34	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77	
	12	12	14	24	-	-	2.61	2.61	3.05	5.23	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79	
	12	12	18	18	-	-	2.70	2.70	4.05	4.05	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	12	14	14	14	-	-	3.00	3.50	3.50	3.50	-	-	13.5 (3.5-16.0)	3.58 (0.7-4.41)	3.77	
	12	14	14	18	-	-	2.79	3.26	3.26	4.19	-	-	13.5 (3.5-16.0)	3.57 (0.7-4.41)	3.78	
	12	14	18	18	-	-	2.61	3.05	3.92	3.92	-	-	13.5 (3.5-16.0)	3.56 (0.7-4.41)	3.79	
	5-unit connection	7	7	7	7	7	-	2.40	2.40	2.40	2.40	2.40	-	12.0 (3.5-12.7)	2.82 (0.7-3.44)	4.26
		7	7	7	7	9	-	2.33	2.33	2.33	2.33	2.98	-	12.3 (3.5-13.5)	3.03 (0.7-3.65)	4.06
		7	7	7	7	12	-	2.24	2.24	2.24	2.24	3.84	-	12.8 (3.5-14.5)	3.29 (0.7-3.98)	3.89
		7	7	7	7	14	-	2.20	2.20	2.20	2.20	4.40	-	13.2 (3.5-15.3)	3.40 (0.7-4.20)	3.88
		7	7	7	7	18	-	2.05	2.05	2.05	2.05	5.30	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
		7	7	7	7	24	-	1.82	1.82	1.82	1.82	6.22	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89
		7	7	7	9	9	-	2.28	2.28	2.28	2.93	2.93	-	12.7 (3.5-14.2)	3.23 (0.7-3.87)	3.93
		7	7	7	9	12	-	2.20	2.20	2.20	2.83	3.77	-	13.2 (3.5-15.3)	3.40 (0.7-4.20)	3.88
		7	7	7	9	14	-	2.15	2.15	2.15	2.76	4.29	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87
7		7	7	9	18	-	1.97	1.97	1.97	2.53	5.06	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7		7	7	9	24	-	1.75	1.75	1.75	2.25	6.00	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90	
7		7	7	12	12	-	2.10	2.10	2.10	3.60	3.60	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87	
7		7	7	12	14	-	2.01	2.01	2.01	3.45	4.02	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7		7	7	12	18	-	1.85	1.85	1.85	3.18	4.77	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89	
7		7	7	12	24	-	1.66	1.66	1.66	2.84	5.68	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91	
7		7	7	14	14	-	1.93	1.93	1.93	3.86	3.86	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7		7	7	14	18	-	1.78	1.78	1.78	3.57	4.59	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89	
7		7	7	14	24	-	1.60	1.60	1.60	3.20	5.50	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91	
7		7	7	18	18	-	1.66	1.66	1.66	4.26	4.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91	
7		7	9	9	9	-	2.22	2.22	2.85	2.85	2.85	-	13.0 (3.5-14.9)	3.34 (0.7-4.09)	3.89	
7		7	9	9	12	-	2.15	2.15	2.76	2.76	3.68	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87	
7		7	9	9	14	-	2.05	2.05	2.64	2.64	4.12	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87	
7		7	9	9	18	-	1.89	1.89	2.43	2.43	4.86	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7		7	9	9	24	-	1.69	1.69	2.17	2.17	5.78	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90	
7		7	9	12	12	-	2.01	2.01	2.58	3.45	3.45	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7		7	9	12	14	-	1.93	1.93	2.48	3.31	3.85	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7		7	9	12	18	-	1.78	1.78	2.29	3.06	4.59	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89	
7		7	9	12	24	-	1.60	1.60	2.06	2.75	5.49	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91	
7		7	9	14	14	-	1.85	1.85	2.38	3.71	3.71	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89	
7		7	9	14	18	-	1.72	1.72	2.21	3.44	4.41	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90	
7		7	9	14	24	-	1.55	1.55	1.99	3.10	5.31	-	13.5 (3.5-16.0)	3.44 (0.7-4.41)	3.92	
7		7	9	18	18	-	1.60	1.60	2.06	4.12	4.12	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91	
7		7	12	12	12	-	1.89	1.89	3.24	3.24	3.24	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7		7	12	12	14	-	1.82	1.82	3.12	3.12	3.62	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89	
7		7	12	12	18	-	1.69	1.69	2.89	2.89	4.34	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90	
7		7	12	12	24	-	1.52	1.52	2.61	2.61	5.24	-	13.5 (3.5-16.0)	3.44 (0.7-4.41)	3.92	
7		7	12	14	14	-	1.75	1.75	3.00	3.50	3.50	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90	
7		7	12	14	18	-	1.63	1.63	2.79	3.26	4.19	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91	
7		7	12	18	18	-	1.52	1.52	2.62	3.92	3.92	-	13.5 (3.5-16.0)	3.44 (0.7-4.41)	3.92	
7		7	14	14	14	-	1.68	1.68	3.38	3.38	3.38	-	13.5 (3.5-16.0)	3.46 (0.7-4.41)	3.90	
7		7	14	14	18	-	1.58	1.58	3.15	3.15	4.04	-	13.5 (3.5-16.0)	3.45 (0.7-4.41)	3.91	
7		9	9	9	9	-	2.18	2.78	2.78	2.78	2.78	-	13.3 (3.5-15.6)	3.44 (0.7-4.30)	3.87	
7		9	9	9	12	-	2.05	2.64	2.64	2.64	3.53	-	13.5 (3.5-16.0)	3.49 (0.7-4.41)	3.87	
7		9	9	9	14	-	1.97	2.53	2.53	2.53	3.94	-	13.5 (3.5-16.0)	3.48 (0.7-4.41)	3.88	
7	9	9	9	18	-	1.82	2.34	2.34	2.34	4.66	-	13.5 (3.5-16.0)	3.47 (0.7-4.41)	3.89		
7	9	9	9</													



6-unit Multi-split heating

AOYG45LBLA6	Combination of Indoor Units						Heating Operation							COP	
							Heating Capacity						Input Power (Min. - Max.)		
							Unit 1 kW	Unit 2 kW	Unit 3 kW	Unit 4 kW	Unit 5 kW	Unit 6 kW			Total Capacity (Min. - Max.) kW
5-unit connection	7	9	12	14	18	-	1.58	2.03	2.70	3.15	4.04	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	7	9	14	14	14	-	1.63	2.09	3.26	3.26	3.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	7	9	14	14	18	-	1.52	1.96	3.05	3.05	3.92	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92
	7	12	12	12	12	-	1.70	2.95	2.95	2.95	2.95	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90
	7	12	12	12	14	-	1.66	2.84	2.84	2.84	3.32	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	7	12	12	12	18	-	1.55	2.66	2.66	2.66	3.97	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92
	7	12	12	14	14	-	1.60	2.75	2.75	3.20	3.20	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	7	12	14	14	14	-	1.55	2.65	3.10	3.10	3.10	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92
	9	9	9	9	9	-	2.70	2.70	2.70	2.70	2.70	-	13.5 (3.5-16.0)	3.49 (0.7-4.4)	3.87
	9	9	9	9	12	-	2.53	2.53	2.53	2.53	3.38	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88
	9	9	9	9	14	-	2.43	2.43	2.43	2.43	3.78	-	13.5 (3.5-16.0)	3.48 (0.7-4.4)	3.88
	9	9	9	9	18	-	2.25	2.25	2.25	2.25	4.50	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90
	9	9	9	9	24	-	2.03	2.03	2.03	2.03	5.38	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	9	9	12	12	-	2.38	2.38	2.38	3.18	3.18	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89
	9	9	9	12	14	-	2.29	2.29	2.29	3.06	3.57	-	13.5 (3.5-16.0)	3.47 (0.7-4.4)	3.89
	9	9	9	12	18	-	2.13	2.13	2.13	2.84	4.27	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	9	9	14	14	-	2.21	2.21	2.21	3.44	3.44	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90
	9	9	9	14	18	-	2.06	2.06	2.06	3.20	4.12	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	9	12	12	12	-	2.25	2.25	3.00	3.00	3.00	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90
	9	9	12	12	14	-	2.17	2.17	2.89	2.89	3.38	-	13.5 (3.5-16.0)	3.46 (0.7-4.4)	3.90
	9	9	12	12	18	-	2.03	2.03	2.70	2.70	4.04	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	9	12	14	14	-	2.09	2.09	2.80	3.26	3.26	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	9	12	14	18	-	1.96	1.96	2.61	3.05	3.92	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92
	9	9	14	14	14	-	2.03	2.03	3.15	3.15	3.15	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	12	12	12	12	-	2.14	2.84	2.84	2.84	2.84	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	12	12	12	14	-	2.06	2.75	2.75	2.75	3.19	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	9	12	12	14	14	-	1.98	2.66	2.66	3.10	3.10	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92
	12	12	12	12	12	-	2.70	2.70	2.70	2.70	2.70	-	13.5 (3.5-16.0)	3.45 (0.7-4.4)	3.91
	12	12	12	12	14	-	2.61	2.61	2.61	2.61	3.06	-	13.5 (3.5-16.0)	3.44 (0.7-4.4)	3.92
7	7	7	7	7	7	7	2.20	2.20	2.20	2.20	2.20	2.20	13.2 (3.5-15.3)	3.28 (0.7-4.20)	4.02
7	7	7	7	7	7	9	2.15	2.15	2.15	2.15	2.15	2.75	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	7	12	2.01	2.01	2.01	2.01	2.01	3.45	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	7	14	1.93	1.93	1.93	1.93	1.93	3.85	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	7	18	1.78	1.78	1.78	1.78	1.78	4.60	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	7	24	1.60	1.60	1.60	1.60	1.60	5.50	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	9	9	2.05	2.05	2.05	2.05	2.65	2.65	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	9	12	1.93	1.93	1.93	1.93	2.48	3.30	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	9	14	1.85	1.85	1.85	1.85	2.38	3.72	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	9	18	1.72	1.72	1.72	1.72	2.21	4.41	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	9	24	1.55	1.55	1.55	1.55	1.99	5.31	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	12	12	1.82	1.82	1.82	1.82	3.11	3.11	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	12	14	1.75	1.75	1.75	1.75	3.00	3.50	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	12	18	1.63	1.63	1.63	1.63	2.79	4.19	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	14	14	1.69	1.69	1.69	1.69	3.37	3.37	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	7	7	14	18	1.58	1.58	1.58	1.58	3.15	4.03	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	9	9	9	1.97	1.97	1.97	2.53	2.53	2.53	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	9	9	12	1.85	1.85	1.85	2.38	2.38	3.19	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	9	9	14	1.78	1.78	1.78	2.29	2.29	3.58	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	9	9	18	1.66	1.66	1.66	2.13	2.13	4.26	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	12	12	12	1.75	1.75	1.75	2.25	3.00	3.00	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	12	14	14	1.69	1.69	1.69	2.17	2.89	3.37	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	12	18	18	1.58	1.58	1.58	2.03	2.70	4.03	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	9	14	14	14	1.63	1.63	1.63	2.09	3.26	3.26	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	12	12	12	12	1.66	1.66	1.66	2.84	2.84	2.84	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	12	12	12	14	1.60	1.60	1.60	2.75	2.75	3.20	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	7	12	14	14	14	1.55	1.55	1.55	2.65	3.10	3.10	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	9	9	9	1.89	1.89	2.43	2.43	2.43	2.43	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	9	12	12	1.78	1.78	2.29	2.29	2.29	3.07	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	9	14	14	1.72	1.72	2.21	2.21	2.21	3.43	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	9	18	18	1.60	1.60	2.06	2.06	2.06	4.12	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	12	12	12	1.69	1.69	2.17	2.17	2.89	2.89	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	12	14	14	1.63	1.63	2.09	2.09	2.79	3.27	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	12	18	18	1.52	1.52	1.96	1.96	2.61	3.93	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	9	14	14	14	1.58	1.58	2.03	2.03	3.14	3.14	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	12	12	12	12	1.60	1.60	2.05	2.75	2.75	2.75	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	9	12	12	14	14	1.55	1.55	1.99	2.66	2.66	3.09	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	7	12	12	12	12	12	1.53	1.53	2.61	2.61	2.61	2.61	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	9	9	9	9	9	9	1.80	2.34	2.34	2.34	2.34	2.34	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	9	9	9	9	12	12	1.72	2.21	2.21	2.21	2.21	2.94	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	9	9	9	9	14	14	1.66	2.13	2.13	2.13	2.13	3.32	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	9	9	9	9	12	12	1.65	2.09	2.09	2.09	2.79	2.79	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	9	9	9	9	12	14	1.58	2.03	2.03	2.03	2.69	3.14	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
7	9	9	9	12	12	12	1.54	1.99	1.99	2.66	2.66	2.66	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
9	9	9	9	9	9	9	2.25	2.25	2.25	2.25	2.25	2.25	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
9	9	9	9	9	12	12	2.13	2.13	2.13	2.13	2.13	2.85	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00
9	9	9	9	9	12	12	2.03	2.03	2.03	2.03	2.69	2.69	13.5 (3.5-16.0)	3.37 (0.7-4.4)	4.00

Notes: • 7: 7000 Btu/h/9: 9000 Btu/h/12: 12000 Btu/h/14: 14000 Btu/h/18: 18000 Btu/h/24: 24000 Btu/h models

- The above specifications apply when connected with a wall-mounted unit.
- 2 or more indoor units should be connected.
- Cooling capacity is determined based on 27°CDB/19°CWB (indoor temperature) and 35°CDB (outdoor temperature).
- Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)
- Total capacity of indoor units connected must be between 9.5 kW and 18.0 kW.



Feature Summary

Type		Wall-mounted type		
Series		Designer series		Standard series
Model name				
		ASEH07/09/12/14KGTG ASYG07/09/12/14KGTG	ASEG07/09/12/14KETF, ASEG07/09/12/14KETF-B, ASYG07/09/12/14KETE, ASYG07/09/12/14KETE-B	ASEH07/09/12/14KMCG ASEH07/09/12/14KMCG-B ASYG07/09/12/14KMCF
Refrigerant				
Energy-saving Features	 Save Occupancy sensor			
	 Economy operation			
	 Setting temperature range limitation			
	 Set temperature auto return			
Features for Comfort	 Power diffuser			
	 Powerful operation			
	 10°C Heat			
	 Outdoor unit low noise operation			
	 Auto changeover			
	 UP/DOWN swing louver			
	 Double swing automatic			
	 Automatic fan speed			
	 Auto restart			
	 Connectable fresh air duct			
	 Fresh air intake			
	 Connectable distributing duct			
Convenience Features	 Auto-off timer			
	 Sleep timer			
	 Program timer			
	 Weekly timer			
	 Weekly & Temperature setback timer			
	 Filter sign			
	 External error output			
	 External ON/OFF input			
	 Wireless LAN control			
Clean Features	 Ion deodorization filter			
	 Apple-catechin filter			
	 Long-life filter			
	 Washable panel			
	 Silver Ion Filter			
Installation / Support	 Automatic airflow adjustment			
	 Drain pump as standard			
	 Blue fin			
	 Refrigerant cycle monitor			

○ : Optional function

Wall-mounted type				
Standard series		Designer series	Standard series	
				
ASEH05/07/09/12KNCA	ASEG18/22/24KMTE	ASYG07/09/12/14LUCA	ASYG07/09/12/14LMCE	ASYG18LFCA, ASYG24LFCC
				
●	●	●	●	●
	○	○	○	○
	○	○	○	○
			●	●
●	●			
●	●	●	●	●
●	●			
●	●	●	●	●
●		●	●	
●	●			●
●	●	●	●	●
●	●	●	●	●
●	○	○	○	○
●	●	●	●	●
●	●	●	●	●
○	●	●		●
	○	○	○	○
●	●	●	●	●
	○	○	○	○
	○	○	○	○
●	○	○	○	○
	●	●	●	●
	●	●	●	●
●	●		●	●
○	○	○	○	○
●				● (30)



Feature Summary

Type		Cassette			Duct		
Series		Compact 4-way Flow Grid type Series	Compact 4-way Flow Series	4-way Flow Series	Mini (With drain pump)		Slim (With drain pump)
Model name							
		AUXG 07/09/12/ 14/18/22/24 KVLA	AUYG07/09LVLA, AUYG12/14/18LVLB, AUYG22/24LVLA	AUYG30/36LRLE, AUYG36/45LRLE	ARXG 07/09/12/14/18 KSLAP	ARYG 07/09/12/14/18 LSLAP	ARXG 07/09/12/14/18 KLLAP
Refrigerant							
Energy-saving Features	 Save Occupancy sensor						
	 Economy operation	●	●	●	●	●	●
	 Setting temperature range limitation	○	○	○	●	●	○
	 Set temperature auto return	●	○	○	●	●	●
Features for Comfort	 Power diffuser						
	 Powerful operation						
	 10°C Heat	●	●	○	○	○	○
	 Outdoor unit low noise operation						
	 Auto changeover	●	●	●	●	●	●
	 UP/DOWN swing louver	●	●	●	○	○	○
	 Double swing automatic						
	 Automatic fan speed	●	●	●	●	●	●
	 Auto restart	●	●	●	●	●	●
	 Connectable fresh air duct		○	●			
	 Fresh air intake	○	○	○			○
	 Connectable distributing duct						
Convenience Features	 Auto-off timer	●	○	○	●	●	●
	 Sleep timer	●	●	○	○	○	○
	 Program timer	●	●	○	○	○	○
	 Weekly timer	●			●	●	●
	 Weekly & Temperature setback timer	○	○	●			●
	 Filter sign	●	●	●	●	●	●
	 External error output				○	○	
	 External ON/OFF input	●	○	○	●	●	●
	 Wireless LAN control	○	○	○	○	○	○
	 Ion deodorization filter						
Clean Features	 Apple-catechin filter						
	 Long-life filter						
	 Washable panel						
	 Silver Ion Filter	○	○	○	○	○	○
Installation / Support	 Automatic airflow adjustment						
	 Drain pump as standard	●	●	●	●	●	●
	 Blue fin			(45/54)			
	 Refrigerant cycle monitor						

○ : Optional function

Duct				Floor		Floor/Ceiling	Ceiling	
Slim (With drain pump)	Medium Static Pressure							
								
ARYG07/09LLTA, ARYG12/14/18LLTB	ARXH 12/14/18/22 KMTAP	ARXG22KMLB, ARXG24KMLA	ARYG 22/24/36/45 LMLA, ARYG 30/36LMLE	AGEG 09/12/14 KVCA	AGYG 09/12/14 LVCA	ABYG 14/22/24 LVTA, ABYG18LVTB	ABEG18/22KRTA	ABYG30/36LRTE, ABYG36/45LRTA
								
●	○	●	●	●	●	●	●	●
○	○	○	○	○	○	○	●	○
○	○	●	○	○	○	○	●	○
				●				
○	○	○	○	●	●	●	○	●
			○ (45) (36LMLA)	●			○	○ (45/54) (36LRTA)
●	●	●	●	●	●	●	●	●
○				●	●		●	
						●		●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
	●	●	●				●	●
○	○	○	○				○	○
		●	●					
○	●	●	○	○	○	○	●	○
○	○	○	○	●	●	●	○	●
	○	●	○	●			●	
●		●	●		○	○		○
●	●	●	●	●	●	●	●	●
	●			○			○	
○	●	●	○	○	○	○	●	○
○	○	○	○	○	○	○	○	○
				●	●			
				●	●			
	○	○	○	●	●			
○	○	○	○	○	○			
	●							
●	●	○	○				○	○
			● (45)				● (30/36/45/54)	● (45)
	○							

Light Commercial & Commercial, Residential VRF

VRF systems provide air conditioning solutions that meet the requirements of a diverse range of buildings.

VRF systems provide air conditioning solutions for large residences as well as large commercial buildings.

V-002 VRF series Overview

V-004 VRF Outdoor Units Lineup

V-006 Features

VRF Outdoor Units



VRF J series

Heat Pump for Small-capacity type

V-020 VRF J-VS

V-026 VRF J-IVS

V-030 VRF J-IV

V-034 VRF J-IVL



VRF V series

Heat Recovery Modular type

V-040 VRF VR-IV


Heat Pump Modular type

V-050 VRF V-IV

VRF INDOOR UNITS

V-058 VRF Indoor Unit Lineup for J-VS

V-066 VRF Indoor Unit Lineup for J-IVS, J-IV, J-IVL, VR-IV, V-IV

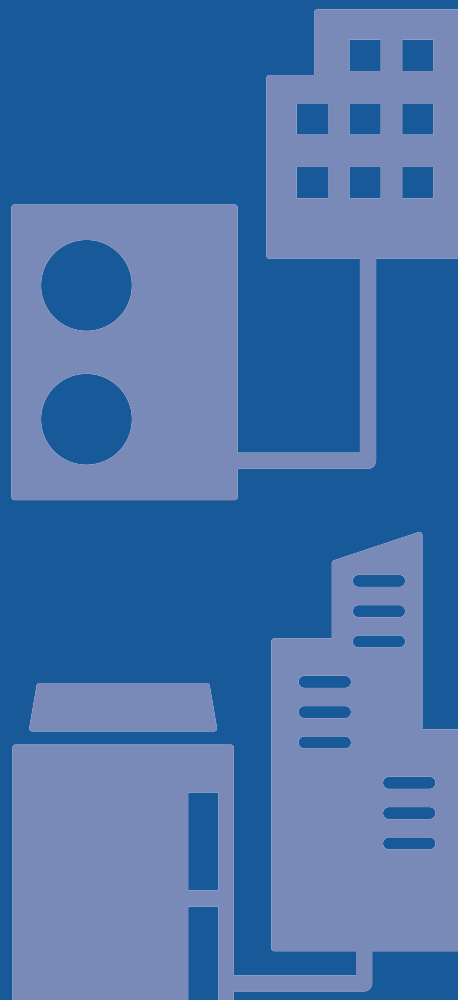



VRF

Light Commercial
& Commercial,
Residential

VRF



FUJITSU GENERAL (Euro) GmbH
participates in the ECP program for VRF.
Check ongoing validity of certificate:
www.eurovent-certification.com

FUJITSU GENERAL LIMITED

VRF Series Overview

Recommended VRF products for various buildings



VRF J-VS



Maximum 6 HP Heat Pump

This product uses R32, a new environmentally friendly refrigerant. With TOP-class energy efficiency and compact design, it can be installed in a limited and narrow space without being conspicuous. Indoor unit connectable up to 130%.

- Sustainable(R32)
- Saving CO2
- Small Body
- Situational Piping Design
- Sightliness installation



Page
V-020

VRF J-IVS



Maximum 6 HP Heat Pump

The 998 mm compact design does not obstruct the view even when installed underneath a waist-high window, ideal for large houses and retail stores. Indoor unit connectable up to 130%.

- Spaces saving and low sound level design
- Flexible system configuration for homes, stores, and small buildings



Page
V-026

VRF J-IV



Maximum 6 HP Heat Pump

J-IV is connectable with up to 14 indoor units (Indoor unit connectable up to 150%) making it suitable for commercial facilities housing a number of small stores.

- High energy efficiency
- Flexible system configuration for small and midsize buildings



Page
V-030

VRF J-IVL



Maximum 18 HP Heat Pump

J-IVL is an outdoor unit with a slim design. Its flexibility in installation makes it ideal for midsize office buildings and hotels. With the newly added 14/16/18 HP models, up to 42 indoor units* are connectable, making them ideal for hotels and educational facilities with many rooms.

- Slim Outdoor Unit
- Small room application
- Class-leading Low Operating Sound



Page
V-034



VRF VR-IV



Maximum 48 HP Heat Recovery

Smart, cutting-edge design
Extensive lineup from 8 HP to 48 HP with the capacity ratio of indoor units connectable up to 150%.

- Simultaneous cooling and heating operation using a single refrigerant system
- Annual cooling operation
- Accommodating changes in temperature difference



Page
V-040

VRF V-IV



Maximum 48 HP Heat Pump

Smart, cutting-edge design
Available in a wide range of models from 8 to 48 HP in 2 HP increments with the capacity ratio of indoor units connectable up to 150%.

- Excellent energy saving
- High design flexibility for placement in any building
- Easy installation and maintenance



Page
V-050

Design Simulator

When installing air conditioning equipment in each room of a building, it is necessary to select an indoor unit suitable for the heat load in the room and derive an outdoor unit that can cover the capacity of all indoor units. In addition, remote controls and converters are selected according to how the customer will manage the air conditioner, and in some cases, a design combined with options may be required to comply with established standards. The "Design Simulator" can be used to facilitate the selection of such complex equipment and the output of system drawings and estimates. (Software for PC)



For more information



VRF Outdoor Units Lineup

Capacity (kW)		Refrigerant	12.1	14.0	15.1-15.5	22.4	28.0	33.5	40.0	45.0	50.0-50.4	55.9	61.5
HP			4	5	6	8	10	12	14	16	18	20	22
J-VS series			 AJY040 KCTAH	 AJY045 KCTAH	 AJY054 KCTAH								
J-IVS series			 AJY040 LCLDH	 AJY045 LCLDH	 AJY054 LCLDH								
J-IV series			 AJY040 LBLDH, AJY040 LELDH	 AJY045 LBLDH, AJY045 LELDH	 AJY054 LBLDH, AJY054 LELDH								
J-IVL series						 AJY072 LELDH	 AJY090 LELDH	 AJY108 LELDH	 AJY126 LELDH	 AJY144 LELDH	 AJY162 LELDH		
VR-IV series Heat Recovery	Space Saving					 AJY072 GALDH	 AJY090 GALDH	 AJY108 GALDH	 AJY126 GALDH	 AJY144 GALDH	 AJY162 GALDH	 AJY180 GALDH	 AJY198 GALDH
	Set Model												
	Energy Efficiency										 AJY144 GALDHH		 AJY198 GALDHH
V-IV series Heat Pump	Space Saving					 AJY072 LALDH	 AJY090 LALDH	 AJY108 LALDH	 AJY126 LALDH	 AJY144 LALDH	 AJY162 LALDH	 AJY180 LALDH	 AJY198 LALDH
	Set Model												
	Energy Efficiency										 AJY144 LALDHH		 AJY180 LALDHH
	Set Model												

	67.0	73.5	78.5	85.0	90.0	95.0	100.5	107.0	112.0	118.5	123.5	130.0	135.0
	24	26	28	30	32	34	36	38	40	42	44	46	48
													
AJY216 GALDH	AJY234 GALDH	AJY252 GALDH	AJY270 GALDH	AJY288 GALDH	AJY306 GALDH	AJY324 GALDH	AJY342 GALDH	AJY360 GALDH	AJY378 GALDH	AJY396 GALDH	AJY414 GALDH	AJY432 GALDH	
													
AJY216 GALDHH	AJY234 GALDHH	AJY252 GALDHH	AJY270 GALDHH	AJY288 GALDHH	AJY306 GALDHH	AJY324 GALDHH	AJY342 GALDHH	AJY360 GALDHH	AJY378 GALDHH	AJY396 GALDHH			
													
AJY216 LALDH	AJY234 LALDH	AJY252 LALDH	AJY270 LALDH	AJY288 LALDH	AJY306 LALDH	AJY324 LALDH	AJY342 LALDH	AJY360 LALDH	AJY378 LALDH	AJY396 LALDH	AJY414 LALDH	AJY432 LALDH	
													
AJY216 LALDHH	AJY234 LALDHH	AJY252 LALDHH	AJY270 LALDHH	AJY288 LALDHH	AJY306 LALDHH	AJY324 LALDHH	AJY342 LALDHH	AJY360 LALDHH	AJY378 LALDHH	AJY396 LALDHH			


Features

High-efficiency

High-efficiency is achieved significantly by the use of a DC twin-rotary compressor, inverter technology, and a large heat exchanger.



DC twin-rotary compressor

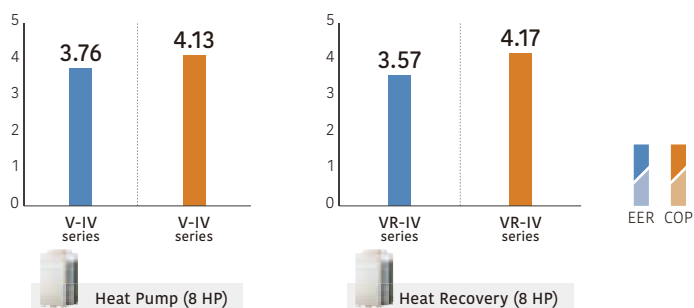

* These specifications are determined by ducted combination.



High-efficiency design with top-class SEER/SCOP

All the VRF series, including the J-IVL series, have DC technology to achieve high-efficiency operation. This enhances the durability and reliability of the VRF series.



J-IVL series

J-IV series


J-IVS series



1 DC fan motor




3 DC inverter control



2 Large heat exchanger



4 Subcooling heat exchanger

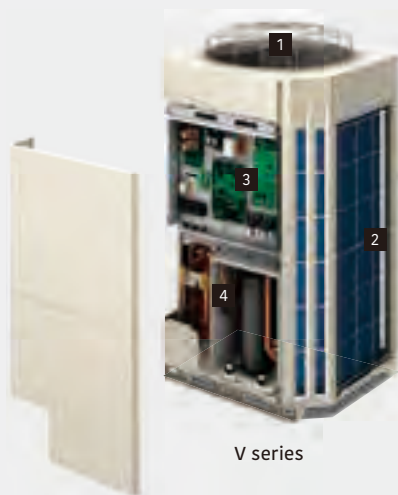

V series



1 3-phase DC fan motor



3 Sine-wave DC inverter control



2 Large heat exchanger




4 Subcooling heat exchanger

Efficient control of operation





Setting temperature range limitation

Sets the minimum and maximum limits on room temperature to establish an optimum balance between energy-saving performance and a comfortable environment.

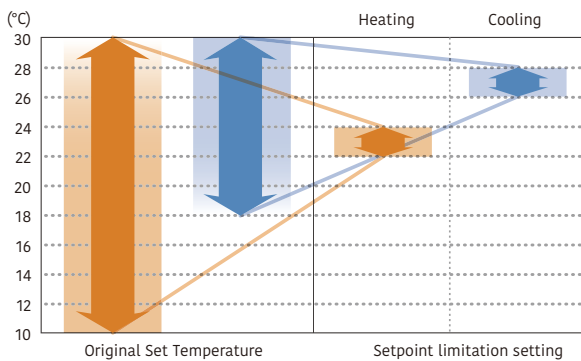

Auto-off timer

The wired remote controller is equipped with an auto-off timer function that automatically stops operation after a fixed period of time has elapsed from the start of operation to avoid wasting energy. The function also allows you to set the interval for stopping operations.

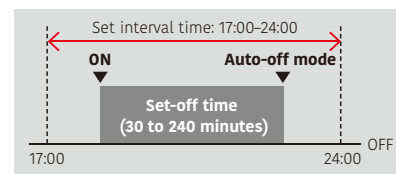


Energy-saving management

A variety of energy-saving operations can be set and managed depending on the season, climate, and time period. Excellent energy-saving operation using the system controller.




Screen image shows Energy Manager software (option)

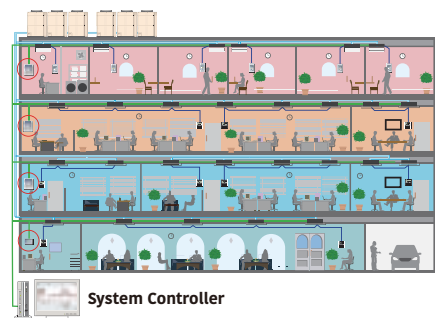

System Controller

Capacity-saving mode


Operation capacity can be reduced in 5 steps from the rated capacity. This mode cuts down on peak power consumption and eases the maximum load on the unit.

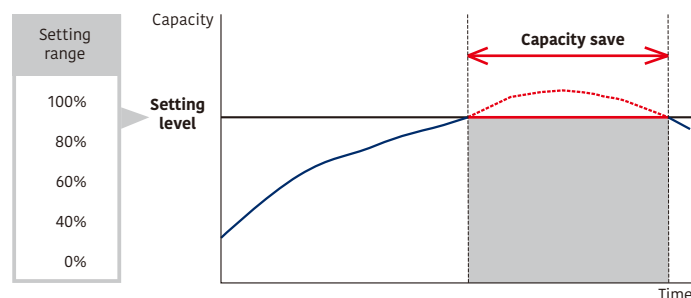



Intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with subtle control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

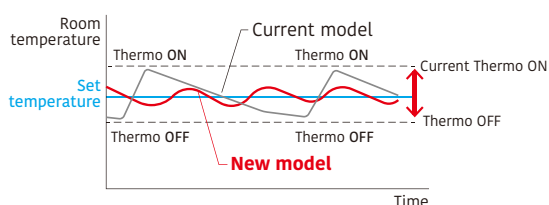


Current refrigerant control

Thermostat-ON/OFF occurs frequently.
→ Frequent changes in room temperature interfere with comfort. The compressor starts and stops repeatedly, wasting energy.


New refrigerant control

The thermostat is turned on and off less frequently than under current control to maintain the room temperature at the target temperature. Compared to current control, the compressor will run longer, thus saving energy.

Current model

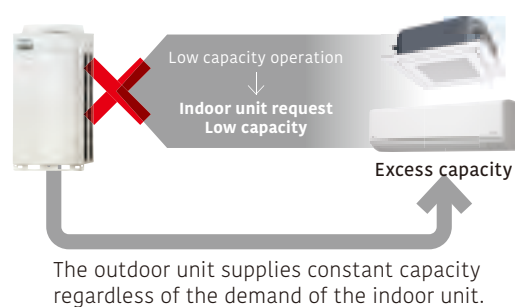

New model

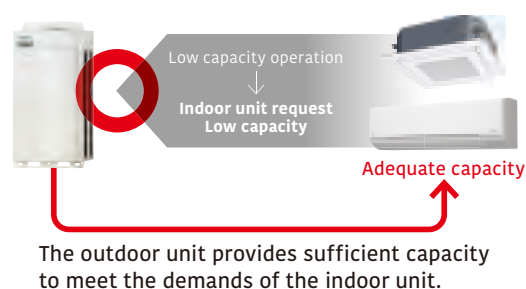


* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

More Comfort




Auto changeover

In Auto setting, the air conditioner switches between cooling and heating modes automatically according to the set temperature and the room temperature.

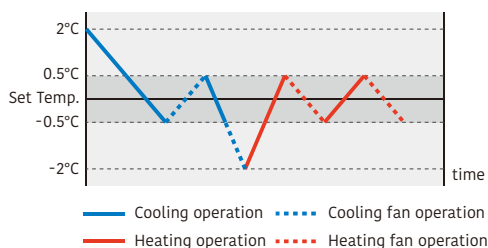


Auto changeover settings enable the indoor unit to easily switch between cooling and heating regardless of the operating mode of other indoor units. These settings can be made using a wired remote controller for a specific indoor unit. Provides a comfortable environment all year round.

Automatic cooling/heating operation for each room is possible

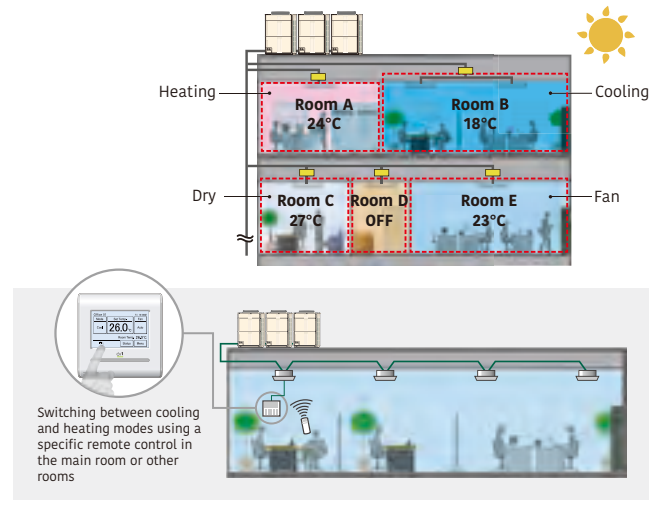

Precise control of refrigerant flow

The combination of DC inverter control and individual control of electronic expansion valves of an indoor unit enables precise and smooth control of the refrigerant flow. This means the room temperature can be set in increments of 0.5°C.

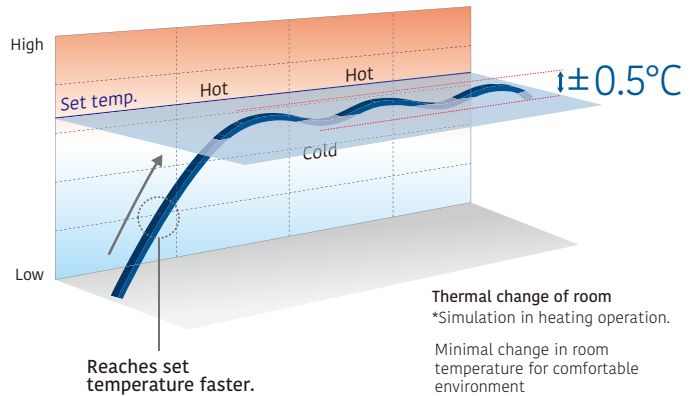


Quiet operation




Quiet operation

Two low noise modes can be switched over automatically between one in which low noise is prioritized over performance, and the other in which performance is prioritized over low noise, depending on the room temperature and outdoor temperature. This feature can be controlled by external input from the outdoor unit or a system controller.

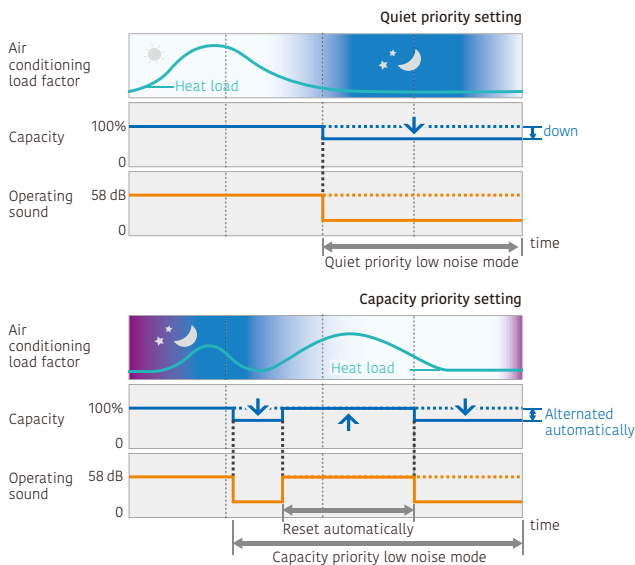


Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

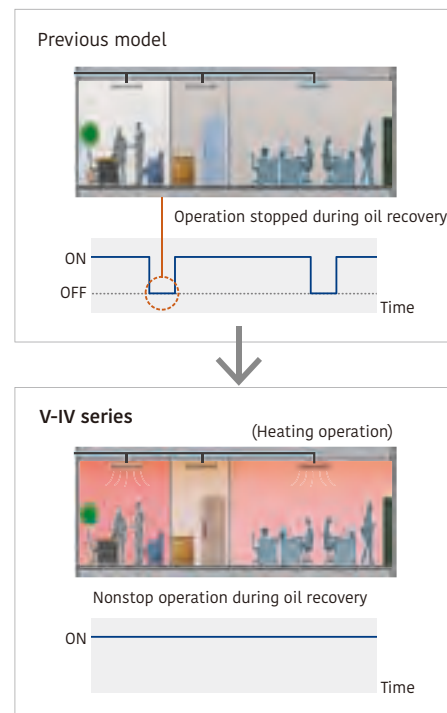

Switching room temperature sensing position for improved heating comfort (Option)


The optional Remote Sensor Kit (UTY-XSZXZ1) can be connected to the indoor unit to improve comfort by installing the unit at a height appropriate for the living environment.

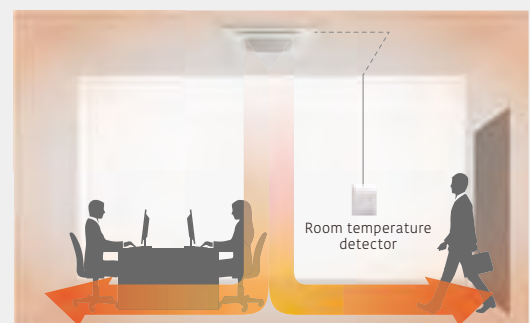

High Reliability

Outdoor unit rotation

The compressor starting order is rotated to equalize the cumulative running time of each unit.

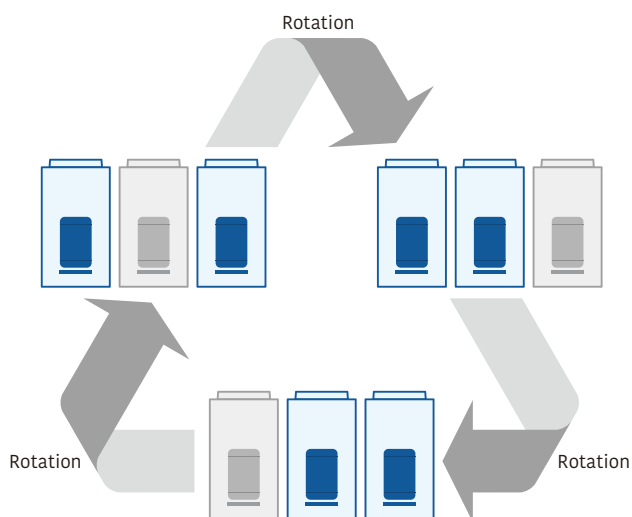


The start and stop timings are alternated among connected compressors.

Backup operation


If one compressor fails, the other compressors will initiate backup operation*.

Note: Backup operation may not be possible depending on the cause of failure.




Advanced refrigerant control

Compressor control logic controls the inverter speed to balance the mass airflow rate of refrigerant in each outdoor unit.

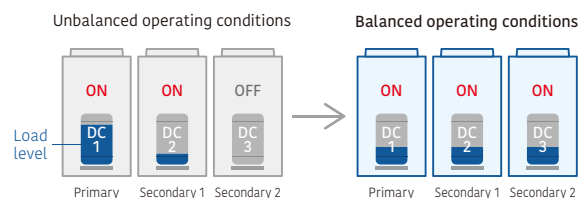


Protection against liquid flowback

The use of a large accumulator means that refrigerant that has not been completely vaporized stays inside the accumulator to ensure no liquid refrigerant is fed into the compressor.

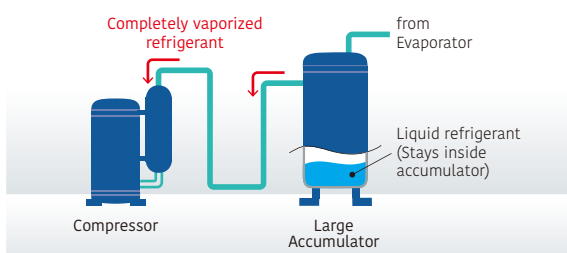

Blue fin heat exchanger

The anti-corrosion blue fin treatment is applied to the heat exchanger of the outdoor unit.

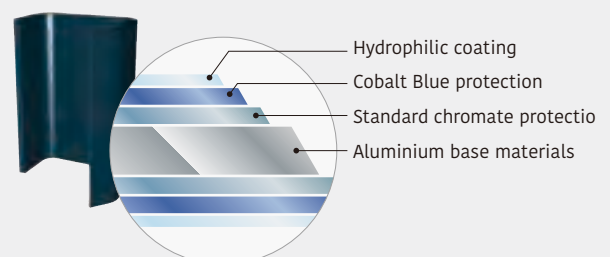



Design Flexibility



Class-leading compact design



An industry-leading compact outdoor unit with optimal airflow pattern design. (Up to 18 HP)

VRF J series Compact Outdoor Unit




Long pipe design



Pipe design suitable for long and narrow office buildings with elevation differences and low-rise stores with long distances (VRF J-IVL series)

VRF J-VS series

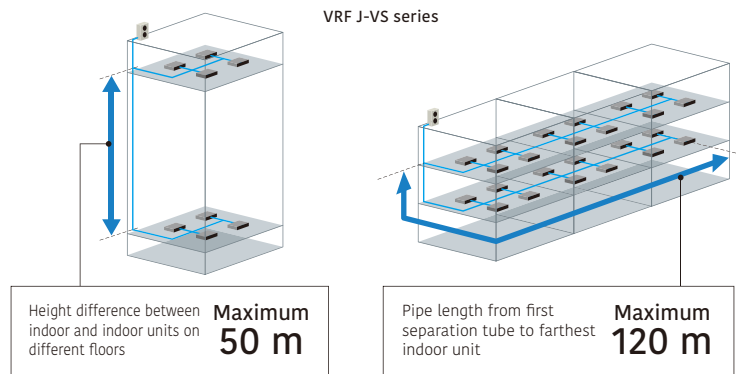


Max. allowable overall pipe length: 1,000 m



The class-leading pipe length of 1,000 m increases flexibility of installation in a wide variety of buildings.

VRF VR-IV series & V-IV series

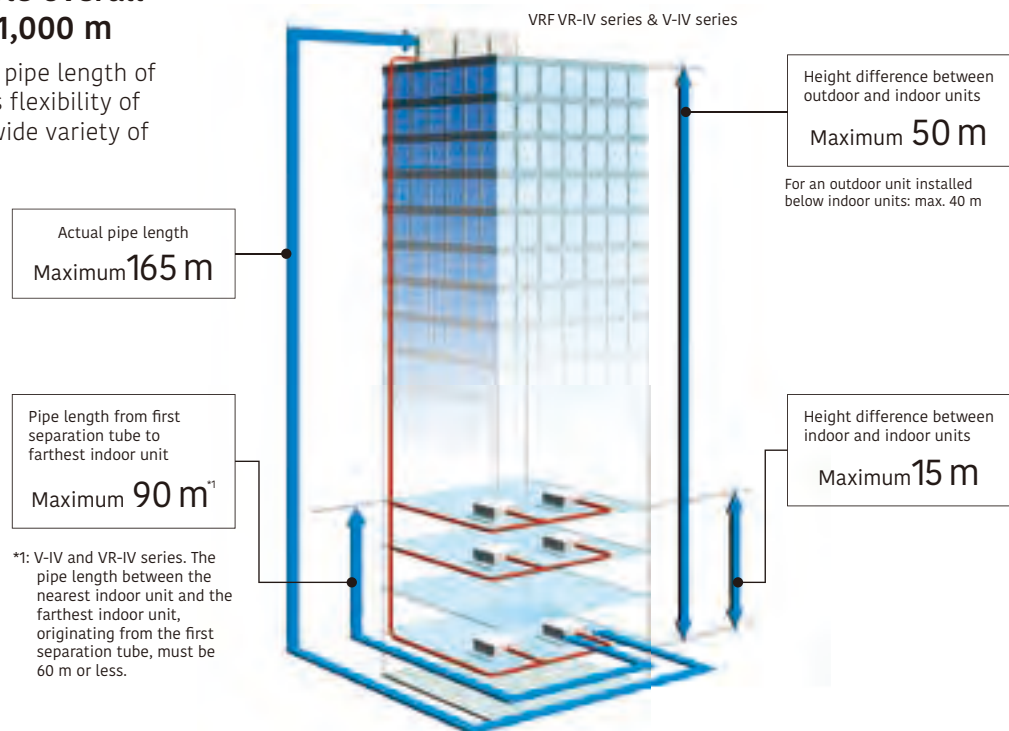

High-capacity connection

Series		Connectable indoor unit capacity range	Connectable indoor units
	VRF J-VS series Heat pump type	50% to 130%	up to 13 ^{*2}
	VRF J-IVS series Heat pump type	50% to 130%	up to 13 ^{*2}
	VRF J-IV series Heat pump type	50% to 150%	up to 14 ^{*2}
	VRF J-IVL series 8/10/12 HP Heat pump type	50% to 150%	up to 30 ^{*3}
	VRF J-IVL series 14/16/18 HP Heat pump type	50% to 150%	up to 42 ^{*4}
	VRF VR-IV series Heat Recovery Modular type	25% ^{*5} to 150%	up to 64
	VRF V-IV series Heat Pump Modular type	50% to 150%	up to 64

*2: 6HP only.

*3: 12HP only.

*4: 18HP only.

*5: For modular type, 25% to 49.9% operation in the entire system is available. (by one unit operation)




Designed for low refrigerant charge

The optimal design of the indoor and outdoor units reduces the amount of refrigerant required and can be easily installed in a room as small as 15 m².



Various optional parts

- Fresh Air Intake Kit to bring in fresh air
- Comfortable temperature control with a remote sensor
- DX Kit links ventilation equipment and air handling units.

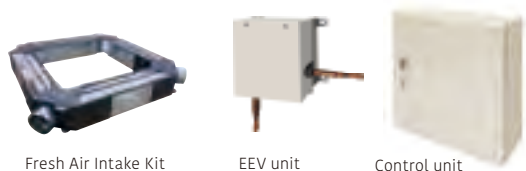

Fresh Air Intake Kit


EEV unit

Control unit



Low ambient operation

Our refrigeration cycle technology enables cooling operation even at -15°C.

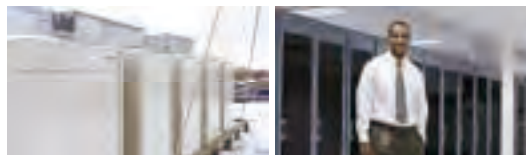


Wide operating temperature range

All outdoor units have a wide operating temperature range and can operate in extreme temperature conditions.


*6: When multiple outdoor units are connected, their operating temperature range is from -5°C to 46°C in cooling.

*7: The operating range is -15°C to 46°C only for systems with all indoor units rated at 5.6 kW or more.

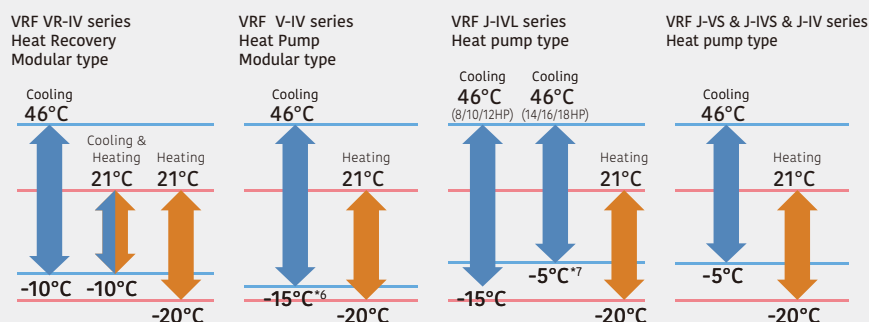


Easy Installation

Easily transported



A lifting strap can be hooked onto an outdoor unit. Design of outdoor unit allows for lifting straps to be used.




Transportable by forklift
The outdoor unit can be lifted and transported by forklift.



Fits into a small elevator.

Easy access


The removable L-shaped front panel provides more room for installation and service work. Multiple installations can be performed easily and efficiently even in tight spaces.

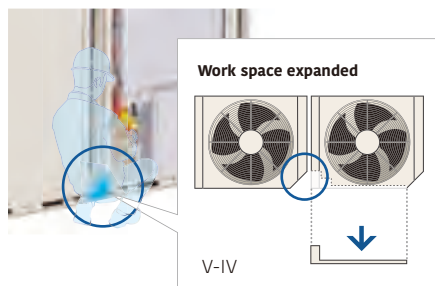

Front access reduces installation intervals

Flexible pipe connection


Piping and wiring can be accessed from the front, left, right, and bottom.

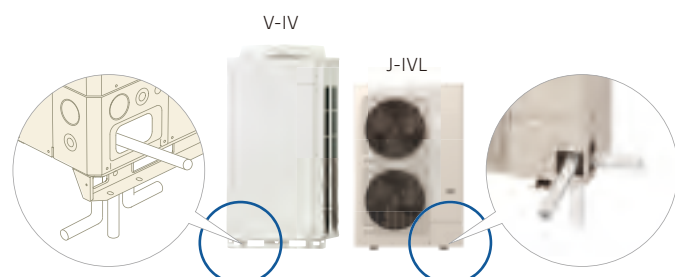



Simplified wiring work

The communication wiring can be installed seamlessly among indoor, outdoor, and RB units, which makes the installation of the wiring system easier.




Maximum wiring length:

3,600 m

Note: The automatic address setting is not available on a serially connected multiple refrigerant system.

Vacuum mode function for easy evacuation

The vacuum mode function enables all expansion valves of an indoor unit to be opened fully, allowing for easier evacuation of air inside pipe lines and indoor units.

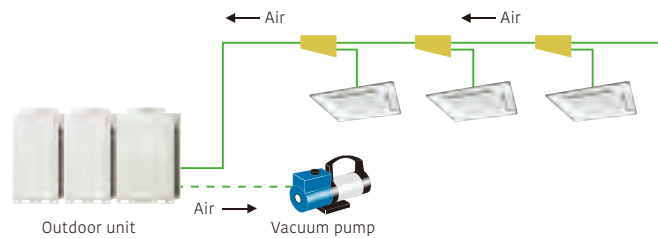

Automatic address setting


Addresses of connected indoor units, RB units, and Signal amplifier can all be set automatically from the PCB in the outdoor unit.

Address is set automatically by the outdoor unit.



Press the push button on the outdoor unit.

Addresses can be set manually from an indoor unit or a remote controller.

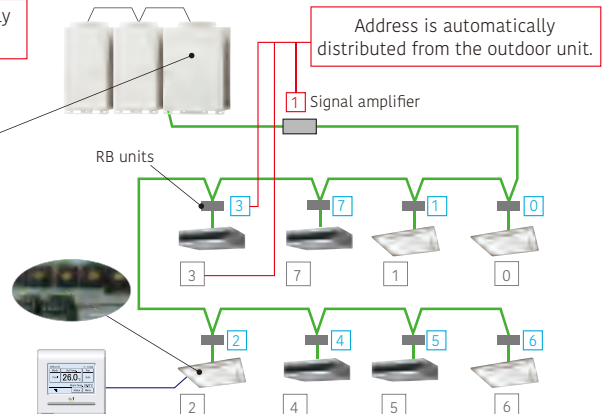

Easy commissioning with Tools

• Service Tool (UTY-ASGXZ1)

The Service Tool checks the refrigerant temperature and pressure, and the operating status of the electronic expansion valves, making it easy to determine if the units are connected properly.



• Central Remote Controller (UTY-DCGGZ3)

After the VRF system has been installed. Conveniently, the "test run" required to verify proper system operation can be performed from a nearby Central RC.




Test run
START



Easy Service and Maintenance

Designed for easy maintenance

A 7-segment indicator lamp panel provides detailed information on the function setting status, refrigerant temperature and pressure, compressor operation time, and other factors, facilitating self-diagnosis for each unit.

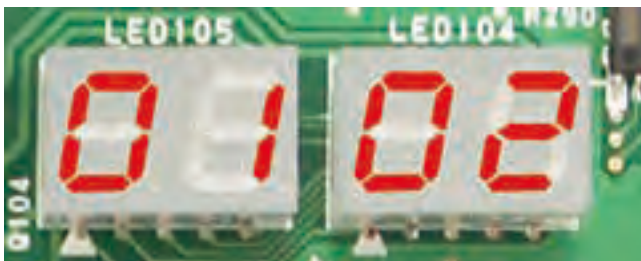


Easy-to-read 7-segment indicator lamp

Shows the following detailed operation and error status without need of any special tools.

Error status can be checked on an outdoor unit's display


- System operation mode
- Discharge temperature and pressure
- Compressor operation status
- Address, type, and number of outdoor unit



- Error status can easily be checked on an outdoor unit's display.


Movable PCB panel

Enables easier access behind the PCB for maintenance work.



The error status can be checked via a wired remote controller for indoor units.


Error codes are displayed on an LCD screen.

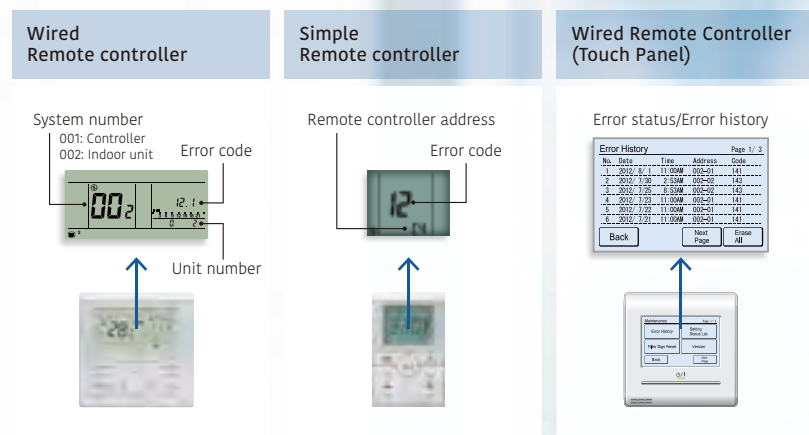

Error diagnosis by Service tool


Connection to Service tool

- A detailed operation status and recent error history can be checked and analyzed using Service tool.
- The last 5 minutes of operation status can be recorded continuously.

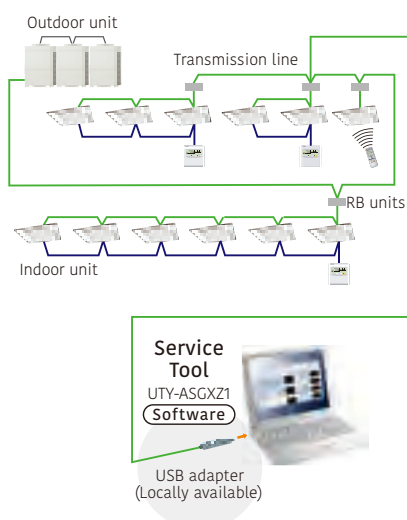

Remote monitoring

The Web Monitoring system enables the monitoring of the system's operation status at any time via the internet to ensure trouble-free operation. The operating VRF network system in the building can be monitored real time over the internet.

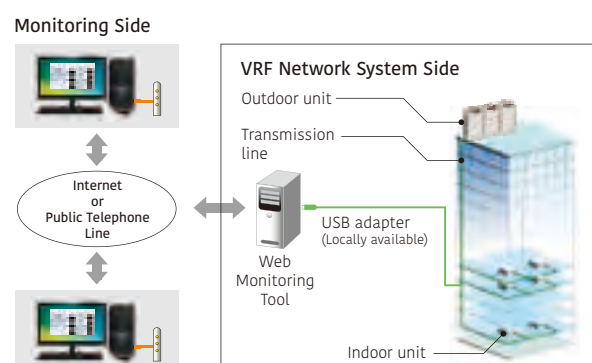




Heat Pump

for Small-capacity type

VRF J-VS

System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

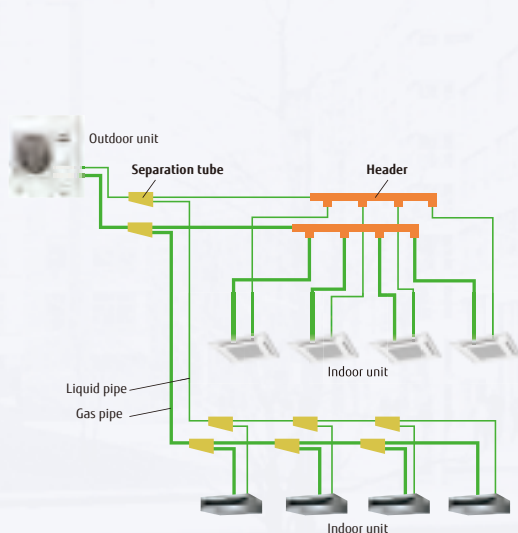

for **SHOP**

for **LARGE APARTMENT**

for **OFFICE**

This product uses R32, a new environmentally friendly refrigerant. With TOP-class energy efficiency and compact design, it can be installed in a limited and narrow space without being conspicuous.

Saving CO₂

Sustainable (R32)

“5S” leading to the optimal solution

Small Body

Situational Piping Design

Sightliness installation

Outdoor unit




R32 refrigerant with reduced global warming potential

- High environmental properties
- High performance
- Economically efficient

GWP^{*1}

(Reference: IPCC 4th Report)



^{*1} GWP (Global Warming Potential): a measurement that indicates how much other greenhouse gases are capable of warming the Earth based on carbon dioxide. This is the integrated value of radiant energy given to the Earth (i.e., the estimated impact on global warming) expressed as a ratio to CO₂.

Sustainable

European F-Gas Regulation Plan

The European Union has tightened F-gas rules as part of European Green Deal policy, which aims for Europe climate neutral by 2050. The F-gas Regulation mainly includes


- (1) Reducing the total volume of HFCs and phasing out HFC in 2050.
- (2) The GWP limits for certain products are required to be strengthened.

Fujitsu General as one of its proactive efforts to preserve the global environment, we are working on technological development to achieve the best balance between refrigerants with lower GWP and energy efficiency of equipment adopting safety measures.

2029	Available at J-VS	2033	2035	2050
Split AC & HP Over 12 kW: GWP 750 and above prohibited 12 kW or less: GWP 150 and above prohibited		Split AC & HP Over 12 kW: GWP 150 and above prohibited		an economy with net-zero greenhouse gas emissions.


Refrigerant saving design

Compact indoor unit, piping design, and optimization of heat exchanger volume significantly reduce the system refrigerant volume.

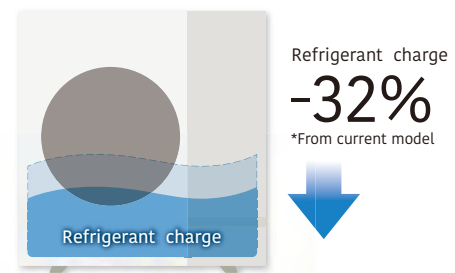

Enhanced disaster safety measures

The system is designed to meet the environmental safety requirements specified in the IEC 603352-40 standard for the use of R32 refrigerant. The environment requiring safety measures is determined by the size of the room in relation to the amount of refrigerant required. For example, if the system is designed for maximum pipe length and the refrigerant charge is 6 kg, safety measures are required for rooms of 15 m² or less.

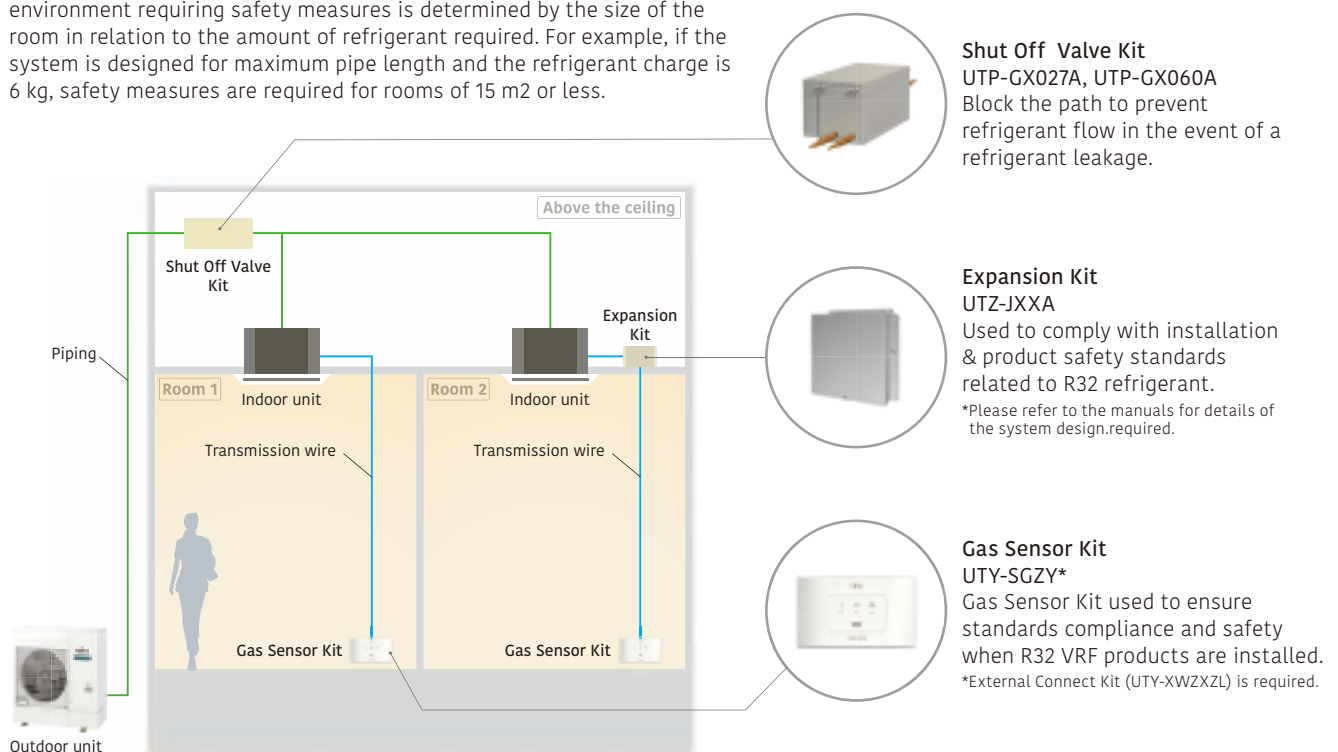

Saving CO2

TOP Class High Energy Saving


The use of large heat exchanger and a high-efficiency Rotary compressor achieves class-leading SEER/SCOP in all models.

SEER
8.27

*045 model


SCOP
5.37

*040 model

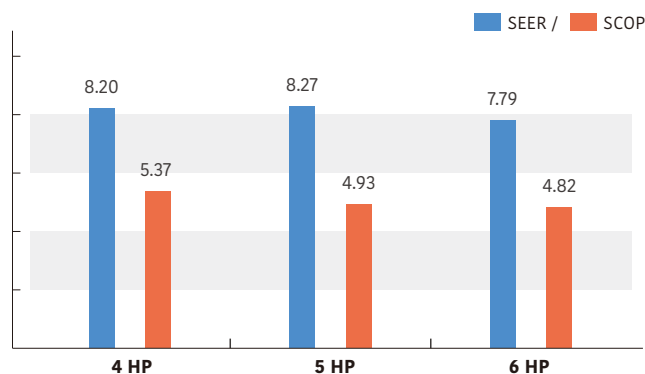


More Energy-Saving compressor control

When the room temperature approaches the set temperature after the start of operation, the capacity required for the outdoor unit becomes lower. The minimum compressor speed at this time can now be controlled at a lower value than with conventional products, enabling more energy-efficient operation.

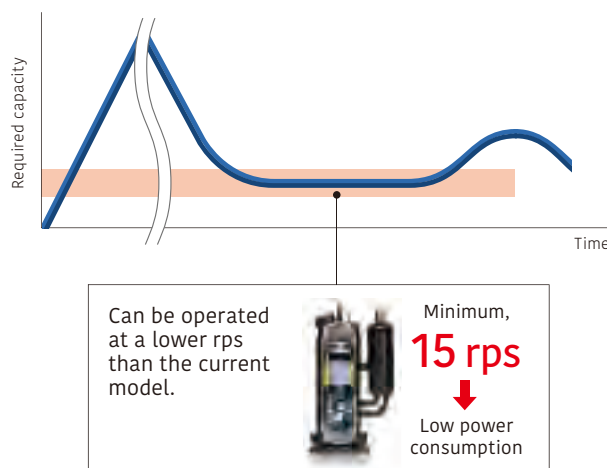

Small Body

Easy to carry, easy to install

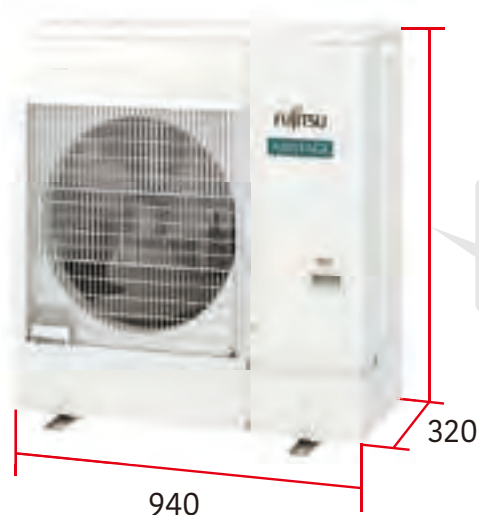

Light
74kg

Height difference
998mm

Small, lightweight outdoor unit

The outdoor units in this series are much more compact than conventional outdoor units of comparable capacity. They can be installed on a balcony, fitting below the height of the railing. With a height of less than 1 m, they can be installed in tight spaces such as under windows.





Situational Piping Design

Long pipe length

Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 120 m. This provides high flexibility in system design.

Long piping lengths are achieved by installing a large-capacity accumulator. No liquid refrigerant is supplied to the compressor even when the required amount of refrigerant is charged in the long piping.

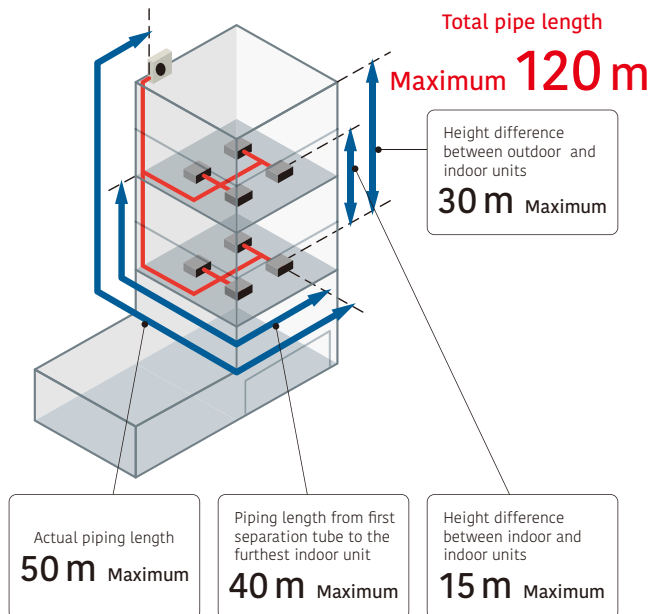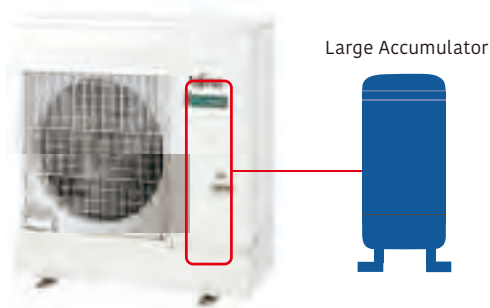

Up to 13 indoor units* can be connected

The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 13 indoor units, which is the best in its class.

*: 6 HP model


Rating Capacity range (HP)	4	5	6
Max. Connectable indoor unit	1-11	1-12	1-13

Sightliness installation

External static pressure

External static pressure measures up to 30 Pa for 4/5/6 HP models.


Even if the outdoor unit is installed in a small space to hide it, the grille and duct airflow path required for exhaust air can be installed up to a static pressure value of 30 Pa.

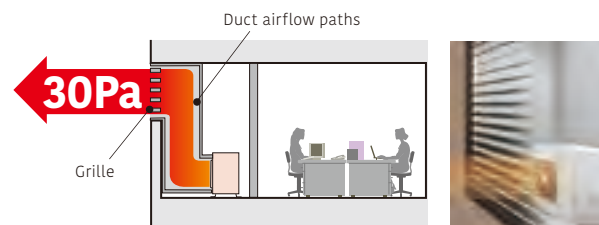

Cooling piping system

New Heat Rejection Technology Cooling piping system "Cooling piping system" is adopted to ensure reliability in high outside air.

Even when the outdoor unit is installed in an environment where heat tends to stay (small space), the cooling system using refrigerant can reduce damage caused by heat from PCBs.

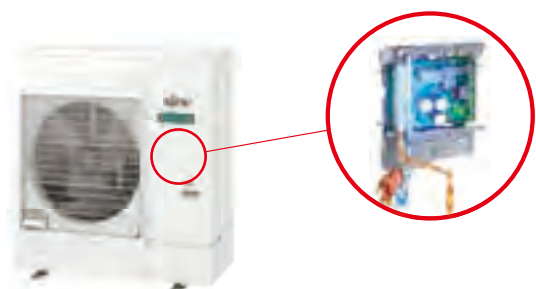

4, 5, 6 HP: AJY040KCTAH / AJY045KCTAH / AJY054KCTAH




Specifications

Rated capacity range		HP	4	5	6
Model name			AJY040KCTAH	AJY045KCTAH	AJY054KCTAH
Maximum connectable indoor units			1-11	1-12	1-13
Power source			Single phase, ~230 V, 50 Hz		
Capacity	Cooling	kW	12.1	14.0	15.1
	Nominal Heating		12.1	14.0	15.1
	Max. Heating		13.6	16.0	16.5
Input power	Cooling	kW	3.15	3.82	4.48
	Nominal Heating		2.55	2.91	3.20
	Max. Heating		3.09	3.62	3.90
EER	Cooling	W/W	3.84	3.66	3.37
COP	Nominal Heating		4.74	4.80	4.71
	Max. Heating		4.40	4.41	4.22
SEER	Cooling		8.20	8.27	7.79
SCOP	Heating		5.37	4.93	4.82
ηc	Cooling	%	325.0	328.0	308.6
ηh	Heating		212.0	194.0	189.8
Airflow rate	m³/h		4,240	4,450	4,450
Sound pressure level/ Power level	Cooling	dB(A)	52 / 70	53 / 71	54 / 72
	Heating		54 / 71	55 / 72	56 / 73
Heat exchanger fin			Blue fin	Blue fin	Blue fin
Net Dimensions	Height	mm	998	998	998
	Width		940	940	940
	Depth		320	320	320
Weight	kg		74	74	74
Refrigerant	Type (Global Warming Potential)		R32 (675)	R32 (675)	R32 (675)
	Charge	kg (CO2eq-T)	2.7 (1.823)	2.7 (1.823)	2.7 (1.823)
Connection pipe diameter	Liquid	mm	9.52	9.52	9.52
	Gas		15.88	15.88	15.88
Total pipe length		m	120	120	120
Max. height difference			30	30	30
Operating Range	Cooling	°C	-5 to 46	-5 to 46	-5 to 46
	Heating		-20 to 21	-20 to 21	-20 to 21

Note: Specifications are based on the following conditions.
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.
The protective function may work when using it outside the operation range.

Dimensions

(Unit: mm)

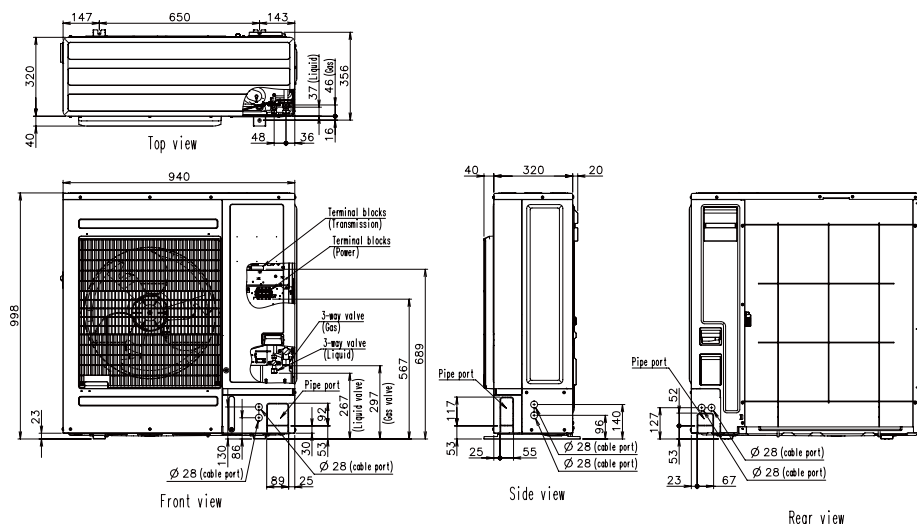




Heat Pump

for Small-capacity type

VRF J-IVS


System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

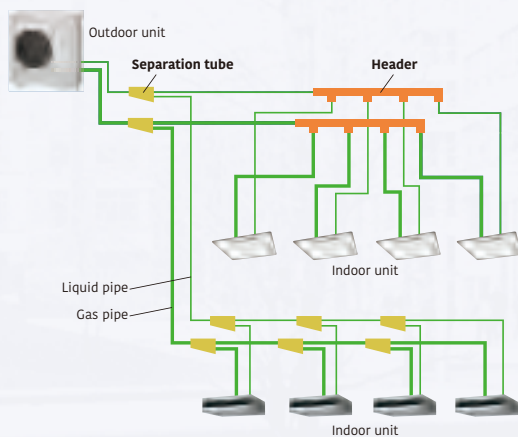

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

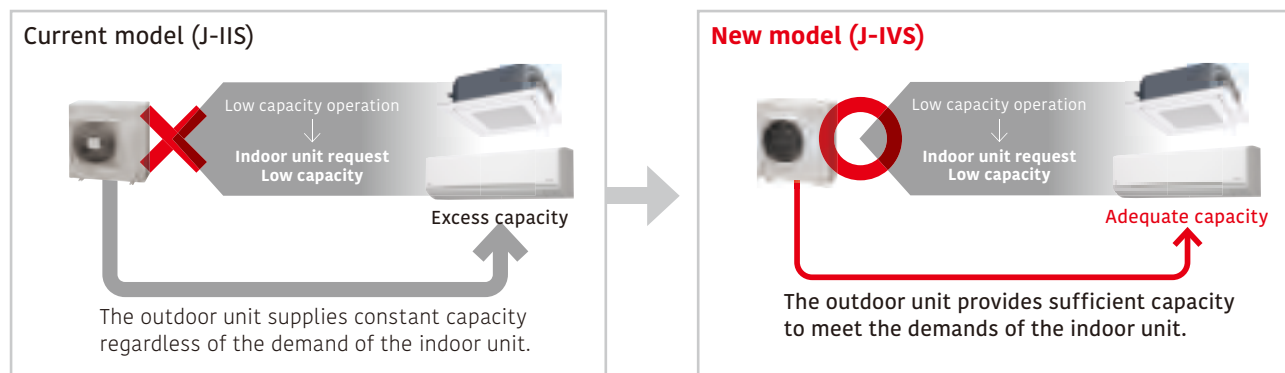

* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

External static pressure

External static pressure measures up to 25 Pa for 4/5/6 HP models.



Advanced high-efficiency technology

Large propeller fan
A large propeller fan with an optimized blade angle achieves both high performance and low noise operation.

DC fan motor
A small, multi-stage DC fan motor provides high-efficiency and low noise operation.


DC inverter control
The active filter module improves efficiency.

Large heat exchanger
The large 3-row heat exchanger substantially improves heat-exchanging performance.

Compact and high-performance DC twin-rotary compressor
High-efficiency is achieved across compressor loads. Especially good performance is achieved in the low- to medium-load range.

High heat-transfer copper tube (Improved lead angle)

Easy to carry, easy to install

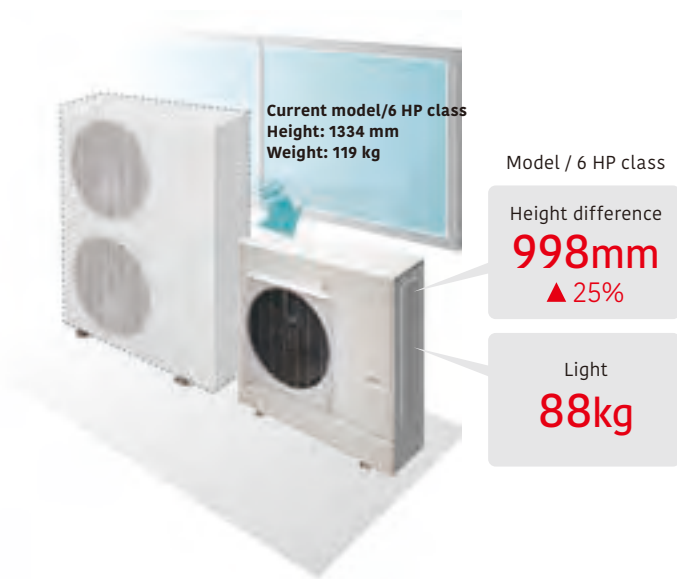

Small, lightweight outdoor unit

The outdoor units in this series are much more compact than conventional outdoor units of comparable capacity. They can be installed on a balcony, fitting below the height of the railing. With a height of less than 1 m, they can be installed in tight spaces such as under windows.




Low noise design

Significantly low noise levels are achieved by the use of a DC twin-rotary compressor, inverter technology, and an advanced airflow pattern design.

Long pipe length

Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 80 m. This provides high flexibility in system design.

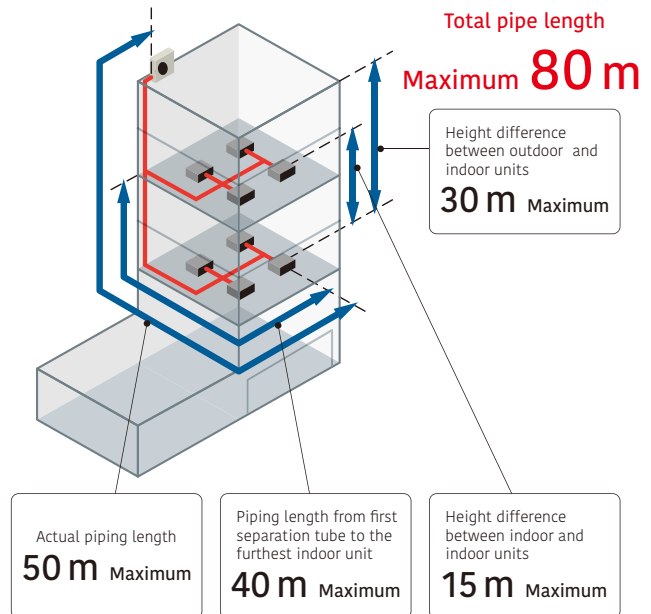

Up to 13 indoor units* can be connected


The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 13 indoor units, which is the best in its class.

*: 6 HP model

Model	Current model (J-IIS)			New model (J-IVS)		
Rating Capacity range (HP)	4	5	6	4	5	6
Max. Connectable indoor unit	1-7	1-8	1-8	1-11	1-12	1-13


Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

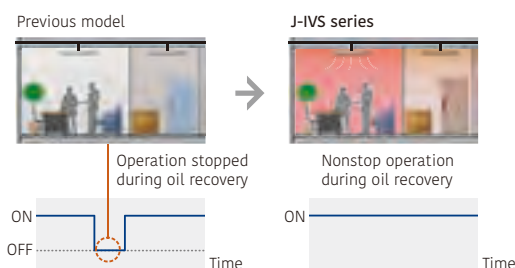

Easier installation

Connection check function: Wiring connections and address settings can be checked thanks to the quick check run function.

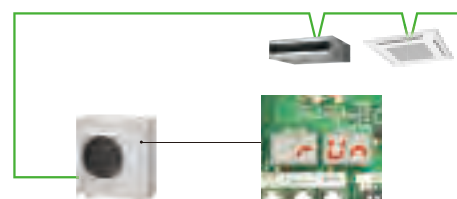

- Displays the number of each connected indoor unit.
- Displays the duplicate address number assigned to an indoor unit.

4, 5, 6 HP: AJY040LCLDH / AJY045LCLDH / AJY054LCLDH



Specifications

Rated capacity range		HP	4	5	6
Model name			AJY040LCLDH	AJY045LCLDH	AJY054LCLDH
Maximum connectable indoor units			1-11	1-12	1-13
Power source			Single phase, ~230 V, 50 Hz		
Capacity	Cooling	kW	12.1	14.0	15.1
	Nominal Heating		12.1	14.0	15.1
	Max. Heating		13.6	16.0	16.5
Input power	Cooling	kW	3.75	4.71	5.55
	Nominal Heating		3.22	3.77	4.33
	Max. Heating		3.99	5.04	5.32
EER	Cooling	W/W	3.22	2.97	2.72
COP	Nominal Heating		3.75	3.71	3.48
	Max. Heating		3.40	3.17	3.10
SEER	Cooling		5.83	5.58	5.47
SCOP	Heating		3.82	3.96	3.99
η _c	Cooling	%	230.2	220.2	215.8
η _h	Heating		149.8	155.4	156.6
Airflow rate		m³/h	4,240	4,400	4,400
Sound pressure level/ Power level	Cooling	dB(A)	53 / 67	53 / 69	54 / 70
	Heating		54 / 68	56 / 69	56 / 70
Heat exchanger fin			Blue fin	Blue fin	Blue fin
Net Dimensions	Height	mm	998	998	998
	Width		970	970	970
	Depth		370	370	370
Weight		kg	88	88	88
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg (CO2eq-T)	4.0 (8.4)	4.0 (8.4)	4.0 (8.4)
Connection pipe diameter	Liquid	mm	9.52	9.52	9.52
	Gas		15.88	15.88	15.88
Total pipe length		m	80	80	80
Max. height difference			30	30	30
Operating Range	Cooling	°C	-5 to 46	-5 to 46	-5 to 46
	Heating		-20 to 21	-20 to 21	-20 to 21

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.


Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

The protective function may work when using it outside the operation range.

Dimensions

(Unit: mm)

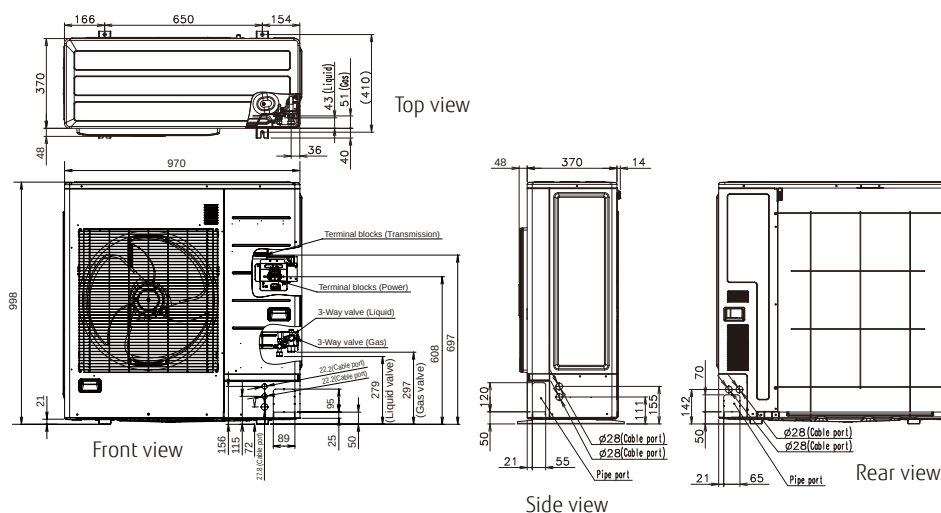




Heat Pump

for Small-capacity type

VRF J-IV


System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

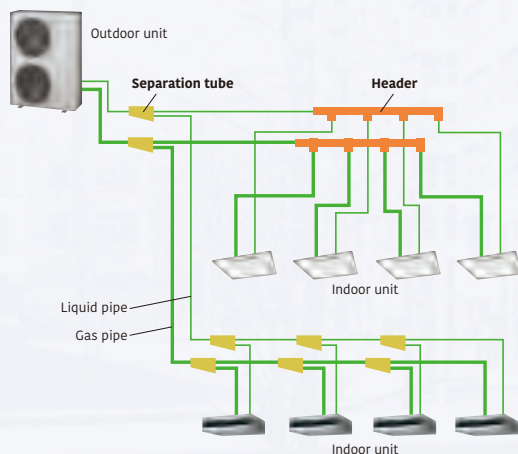

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

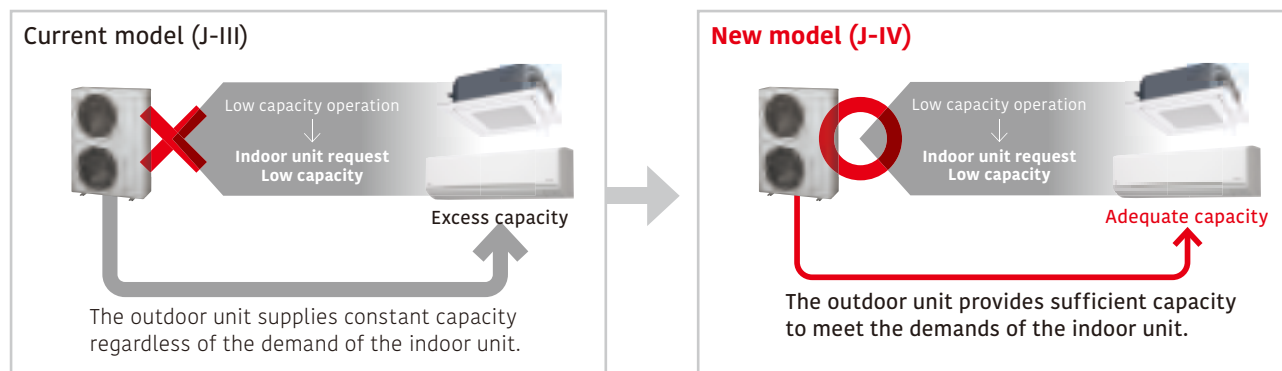

* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

External static pressure

External static pressure measures up to 30 Pa for 4/5/6 HP.



Advanced high-efficiency technology

Large propeller fan
A large propeller fan with an optimized blade angle achieves both high performance and low noise operation.

DC fan motor
A small, multi-stage DC fan motor contributes to high-efficiency and low noise operation.

Large heat exchanger
The large 3-row heat exchanger substantially improves heat-exchanging performance.

High-efficiency compressor motor
Optimized refrigerant flow design
Highly accurate parts

DC inverter control
The active filter module improves efficiency.

Subcooling heat exchanger
The dual-tube heat exchanger improves cooling performance.

DC twin-rotary compressor
High-efficiency is achieved across compressor loads. Especially good performance is achieved in the low-to medium-load range.

Pressure-Enthalpy diagram: Shows the refrigerant cycle with labels for 'effect' and 'Cooling performance improved'.


Compressor efficiency diagram: Shows 'DC Twin-Rotary Compressor' efficiency across 'Compressor capacity' from 'High' to 'Low'.

Efficiency in actual operating conditions

The use of a large heat exchanger and a high-efficiency Scroll compressor achieves class-leading EER/COP (Max. Heating) in all models.

High EER/COP (Maximum Heating)

EER / COP (Maximum Heating)

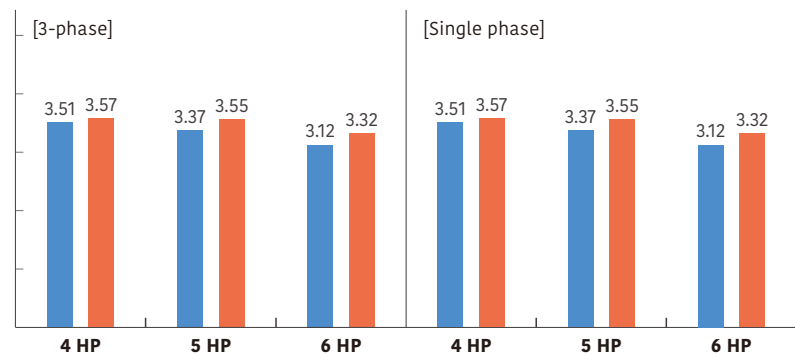

* These specifications are determined by cassette combination.

Long pipe length

Our advanced refrigerant control technology allows us to achieve a total refrigerant pipe length of 180 m. This provides high flexibility in system design.

Up to 14 indoor units* can be connected

The combination of smaller but sufficiently powerful indoor units and outdoor units with an optimized heat exchanging structure makes it possible to connect up to 14 indoor units, which is the best in its class.

*: 6 HP model

Model	Current model (J-III)			New model (J-IV)		
Rating Capacity range (HP)	4	5	6	4	5	6
Max. Connectable indoor unit	1-9	1-10	1-13	1-11	1-12	1-14

Total pipe length
Maximum 180 m

Height difference between outdoor and indoor units

Maximum 50 m

For an outdoor unit installed below indoor units: max. 40 m

Height difference between indoor and indoor units

Maximum 15 m


Pipe length from first separation tube to farthest indoor unit

Maximum 40 m

Actual pipe length
Maximum 120 m


Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

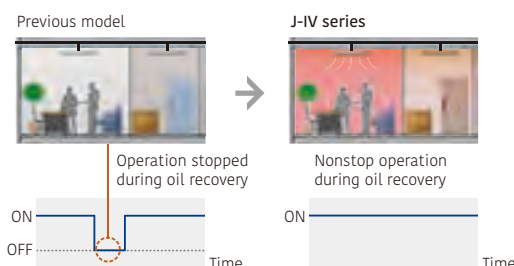

Easier installation

Connection check function: Wiring connections and address settings can be checked thanks to the quick check run function.

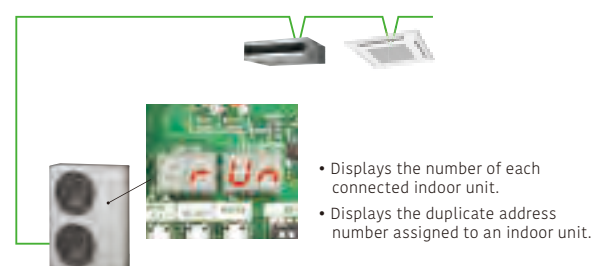

4,5,6HP: AJY040LBLDH / AJY045LBLDH / AJY054LBLDH
AJY040LELDH [3-phase] / AJY045LELDH [3-phase] / AJY054LELDH [3-phase]



Specifications


Rated capacity range		HP	4	5	6
Model name			AJY040LBDH	AJY045LBDH	AJY054LBDH
Maximum connectable indoor units			1-11	1-12	1-14
Power source			Single phase, ~230 V, 50 Hz		
Capacity	Cooling	kW	12.1	14.0	15.5
	Nominal Heating		12.1	14.0	15.5
	Max. Heating		13.6	16.0	18.0
Input power	Cooling	kW	3.44	4.15	4.96
	Nominal Heating		3.14	3.60	4.17
	Max. Heating		3.80	4.50	5.41
EER	Cooling	W/W	3.51	3.37	3.12
COP	Nominal Heating		3.85	3.88	3.71
	Max. Heating		3.57	3.55	3.32
SEER	Cooling		6.50	6.30	6.08
SCOP	Heating		3.83	3.93	3.94
nc	Cooling	%	257.0	249.0	240.0
nh	Heating		150.0	154.0	155.0
Airflow rate			6,200	6,600	7,000
Sound pressure level/ Power level	Cooling	dB(A)	50 / 65	52 / 66	53 / 67
	Heating		52 / 67	55 / 69	56 / 69
Heat exchanger fin			Blue fin	Blue fin	Blue fin
Net Dimensions	Height	mm	1,334	1,334	1,334
	Width		970	970	970
	Depth		370	370	370
Weight		kg	117	117	119
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg (CO2eq-T)	4.8 (10.0)	5.3 (11.1)	5.3 (11.1)
Connection pipe diameter	Liquid	mm	9.52	9.52	9.52
	Gas		15.88	15.88	19.05
Total pipe length		m	180	180	180
Max. height difference			50/40 (Outdoor unit: Upper/Lower)		
Operating Range	Cooling	°C	-5 to 46	-5 to 46	-5 to 46
	Heating		-20 to 21	-20 to 21	-20 to 21

4	5	6
AJY040LELDH	AJY045LELDH	AJY054LELDH
1-11	1-12	1-14
3-phase, ~400 V, 50 Hz		
12.1	14.0	15.5
12.1	14.0	15.5
13.6	16.0	18.0
3.44	4.15	4.96
3.14	3.60	4.17
3.80	4.50	5.41
3.51	3.37	3.12
3.85	3.88	3.71
3.57	3.55	3.32
6.50	6.30	6.08
3.83	3.93	3.94
257.0	249.0	240.0
150.0	154.0	155.0
6,200	6,600	7,000
50 / 65	52 / 66	53 / 67
52 / 67	55 / 69	56 / 69
Blue fin	Blue fin	Blue fin
1,334	1,334	1,334
970	970	970
370	370	370
118	119	119
R410A (2,088)	R410A (2,088)	R410A (2,088)
4.8 (10.0)	5.3 (11.1)	5.3 (11.1)
9.52	9.52	9.52
15.88	15.88	19.05
180	180	180
50/40 (Outdoor unit: Upper/Lower)		
-5 to 46	-5 to 46	-5 to 46
-20 to 21	-20 to 21	-20 to 21

Note: Specifications are based on the following conditions.
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.
The protective function may work when using it outside the operation range.

Dimensions

(Unit: mm)

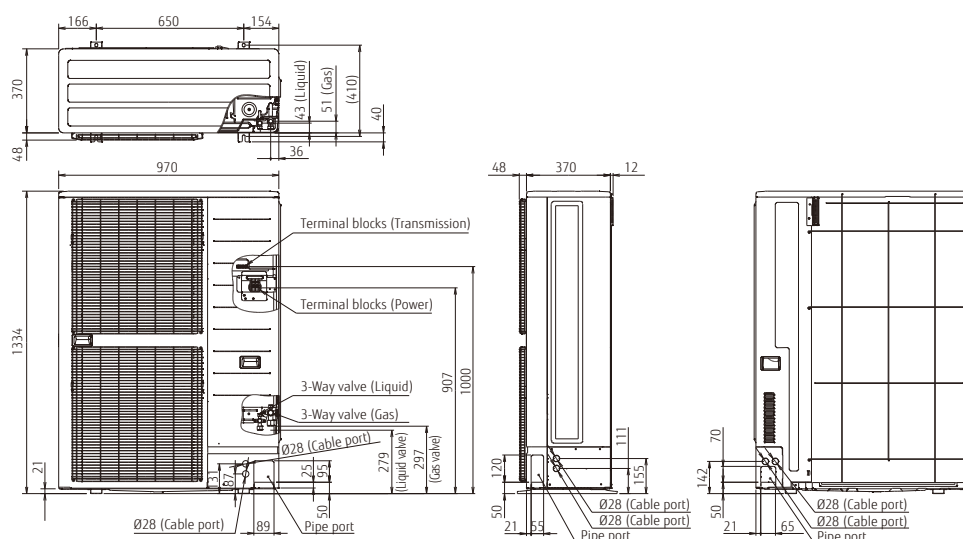




Heat Pump

for Small-capacity type

VRF J-IVL


System configuration example

- Suitable for air conditioning small and medium-size buildings. One refrigerant system is used for each outdoor unit.
- Multiple indoor units are connected with separation tubes and headers.

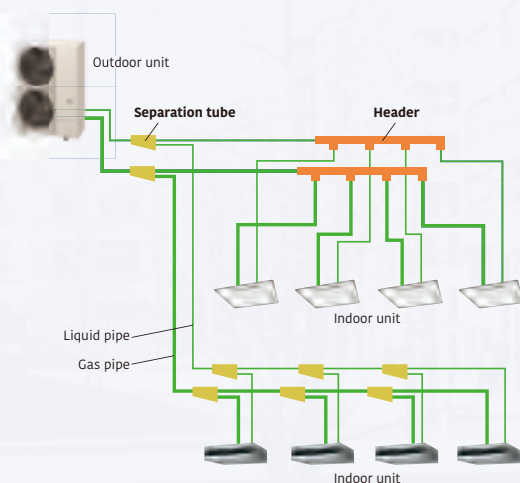

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

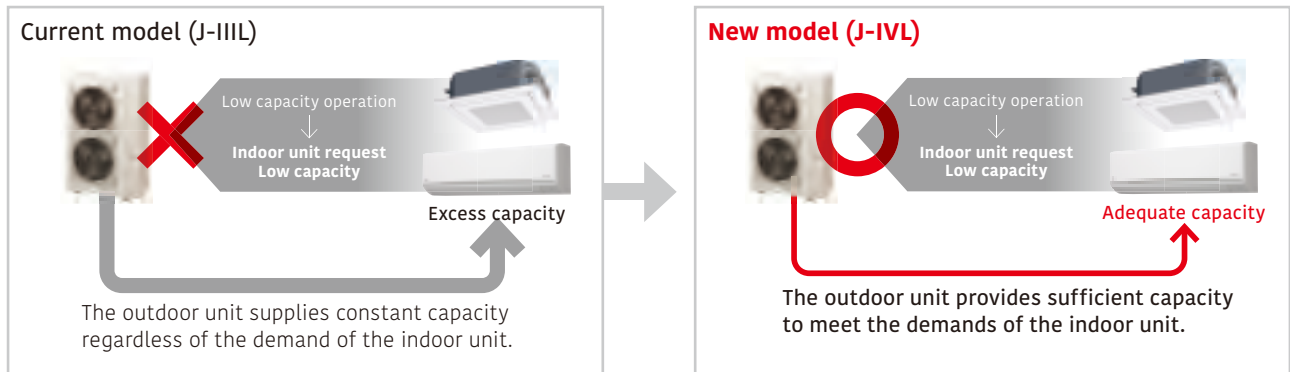


* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

External static pressure

External static pressure is available up to 60 Pa for 14/16/18 HP. (30 Pa for 8/10 HP, 40 Pa for 12 HP)
Capacities are slightly decreased relative to the rated values during high static pressure operations.



Advanced high-efficiency technology

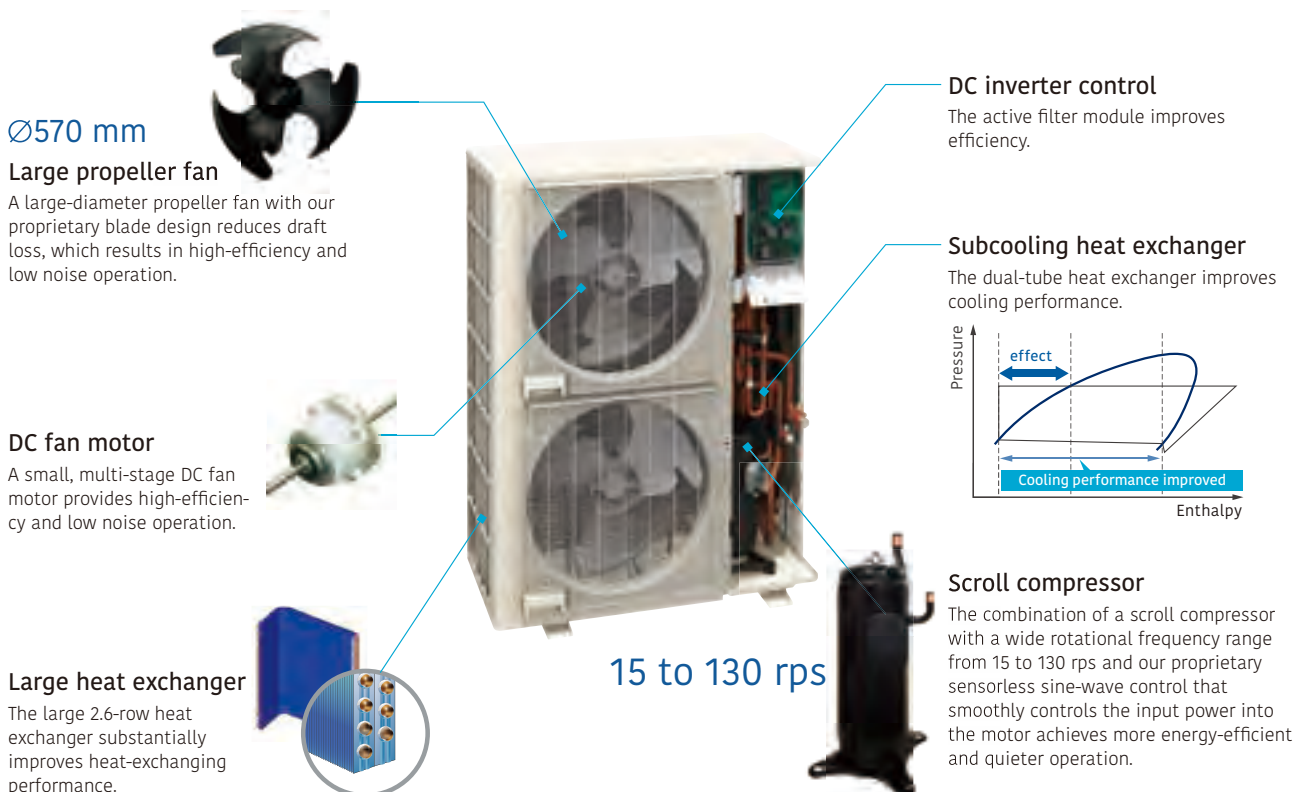


Fujitsu General offers a perfect total air conditioning system for small office buildings with multiple small rooms, taking into consideration energy savings, low noise, comfortable air volume, usage and purpose, and centralized control.

VRF J-IVL

Image: 8/10/12 HP models


Slim & Compact design

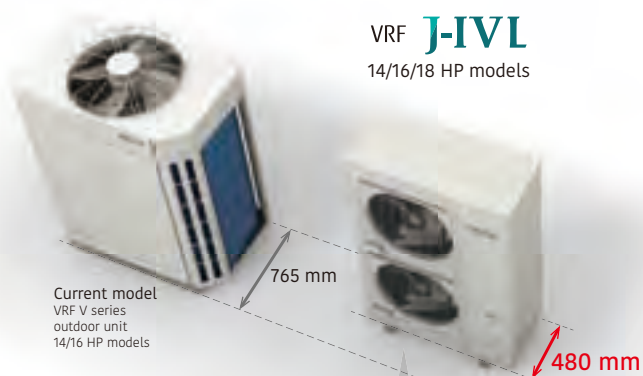

Depth difference
-285mm
J-IVL all models
Compared with current all models

Space requirement
-45%!
Compared with current
14/16 HP models

Weight
-62 kg!
Compared with
current 16 HP model

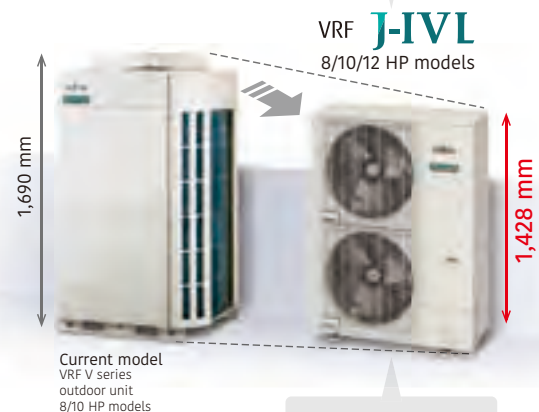

Height difference
-262mm
Compared with
current 8 HP model

Space requirement
-26%!
Compared with current
8/10 HP models

Various installation methods



VRF V series outdoor unit



VRF J series outdoor unit

Installation

Low noise level in consideration of nearby residents

Front air discharge type with a width of about 1,000 mm, allowing for flexible installation even in narrow spaces.



VRF V series outdoor unit



VRF J series outdoor unit

Narrow space behind building

Space saving

Small and thin, allowing for direct ground or wall mounting installations even in narrow alleys.



VRF V series outdoor unit



VRF J series outdoor unit

Installation on the back street of a building

Flexible installation


Slim, low-body front air discharge meets the requirements for installation even in tight spaces. Installation flexibility without blocking the windows of buildings contributes to substantial space savings, even when multiple units are installed.

Efficiency in actual operating conditions

The use of a large heat exchanger and a high-efficiency Scroll compressor achieves class-leading EER/COP (Max. Heating) in all models.

High EER/COP (Maximum Heating)

■ EER / ■ COP (Maximum Heating)

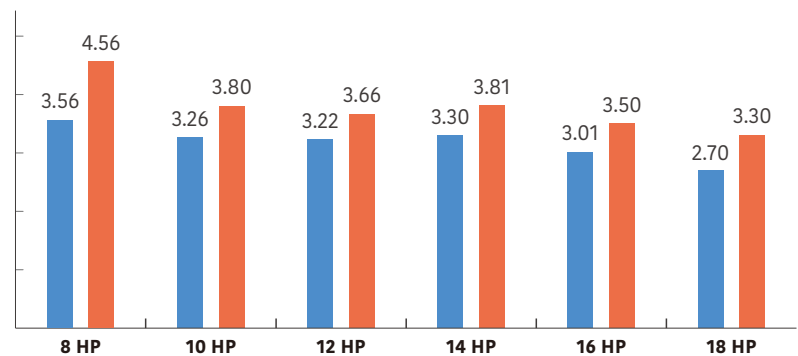

* These specifications are determined by cassette combination.


Long pipe length

Our advanced refrigerant control technology extends the maximum allowable length of refrigerant piping to 400 m. This provides high flexibility in system design.

Up to 42 indoor units* can be connected.

The combination of smaller but sufficiently powerful indoor units and a new outdoor unit with an optimized heat exchanging structure makes it possible to connect up to 42 indoor units, which is the best in its class.

*: 18 HP model

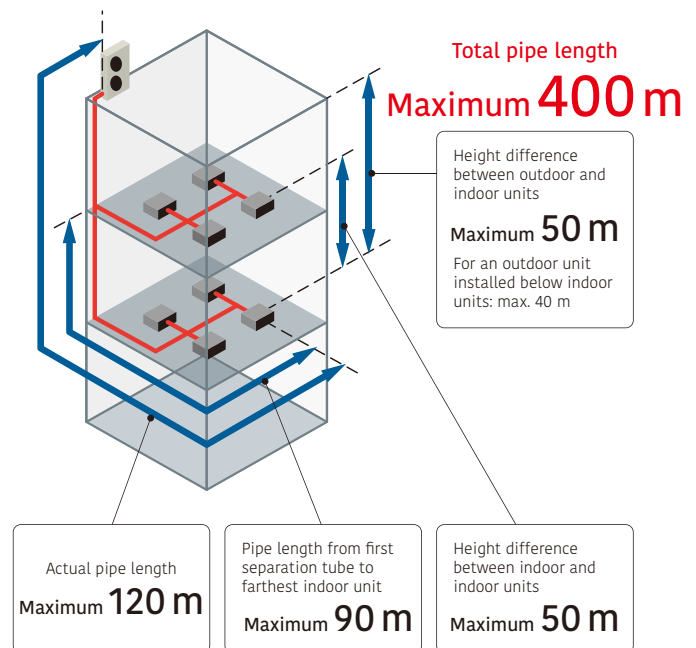

Class-leading low operating sound

The top-class low operating noise makes it ideal for use in densely populated areas. These low operating sound models are ideal for installation in densely populated areas.

Sound Power Level

66 dB(A)



J-IVL (8 HP)

77 dB(A)

-11 dB(A)



Current model (8 HP)

8,10,12 HP: AJY072LELDH / AJY090LELDH / AJY108LELDH
14,16,18 HP: AJY126LELDH / AJY144LELDH / AJY162LELDH



Specifications

Rated capacity range		HP	8	10	12	14	16	18
Model name			AJY072LELDH	AJY090LELDH	AJY108LELDH	AJY126LELDH	AJY144LELDH	AJY162LELDH
Maximum connectable indoor units			1-20	1-25	1-30	1-36	1-40	1-42
Power source			3-phase, ~400V, 50Hz					
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0
	Nominal Heating		22.4	28.0	33.5	40.0	45.0	50.0
	Max. Heating		25.0	31.5	37.5	45.0	50.0	55.0
Input power	Cooling	kW	6.30	8.59	10.42	12.12	14.96	18.52
	Nominal Heating		4.65	6.61	8.18	9.71	11.81	13.66
	Max. Heating		5.45	8.29	10.25	11.81	14.29	16.66
EER	Cooling	W/W	3.56	3.26	3.22	3.30	3.01	2.70
COP	Nominal Heating		4.82	4.24	4.10	4.12	3.81	3.66
	Max. Heating		4.56	3.80	3.66	3.81	3.50	3.30
SEER	Cooling		7.62	7.50	7.27	7.27	7.00	6.29
SCOP	Heating		3.89	3.61	3.63	3.53	3.51	3.54
nc	Cooling		301.8	297.0	287.8	287.8	277.0	248.6
nh	Heating	%	152.6	141.4	142.2	138.2	137.4	138.6
Airflow rate		m ³ /h	8,400	9,000	11,000/12,100	13,000	14,000	14,800/15,300
Sound pressure level/ Power level	Cooling	dB(A)	52/66	54/69	59/73	62/75	64/77	65/79
	Heating		54/66	57/70	62/75	63/76	65/78	68/82
Net Dimensions	Height	mm	1,428	1,428	1,428	1,638	1,638	1,638
	Width		1,080	1,080	1,080	1,080	1,080	1,080
	Depth		480	480	480	480	480	480
Weight		kg	170	177	178	213	213	217
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg (CO ₂ eq-T)	7.0 (14.6)	7.5 (15.7)	7.5 (15.7)	11.0 (23.0)	11.0 (23.0)	11.8 (24.6)
Connection pipe diameter	Liquid	mm	9.52	9.52	12.70	12.70	12.70	12.70
	Gas		19.05	22.20	28.58	28.58	28.58	28.58
Total pipe length		m	400	400	400	400	400	400
Max. height difference			50/40 (Outdoor unit: Upper/Lower)					
Operating Range	Cooling	C°	-15 to 46	-15 to 46	-15 to 46	-5 to 46*	-5 to 46*	-5 to 46*
	Heating		-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating: Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.


Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

* The cooling operation range of -15 to 46°C is allowed only when all of the indoor units connected to the system are higher than capacity of 5.6kW.


Dimensions

(Unit: mm)

8, 10, 12 HP

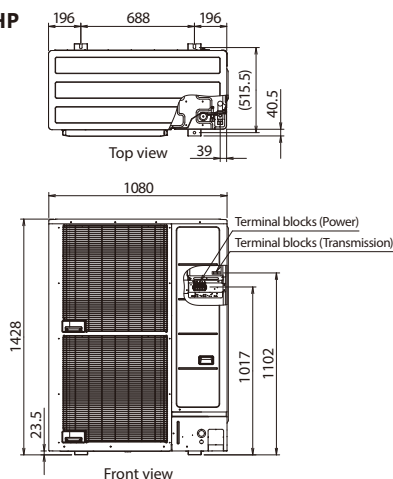

14, 16, 18 HP

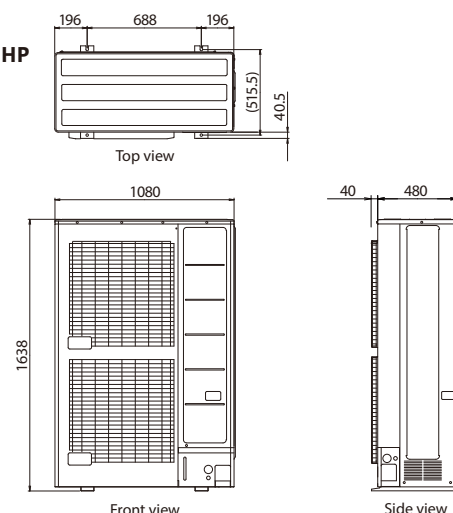




Heat Recovery

Modular type


VRF VR-IV

Highly energy-efficient operation

Our heat recovery systems achieve high operating energy efficiency by drawing heat from the room to be cooled and transferring it as energy for rooms that are to be heated.

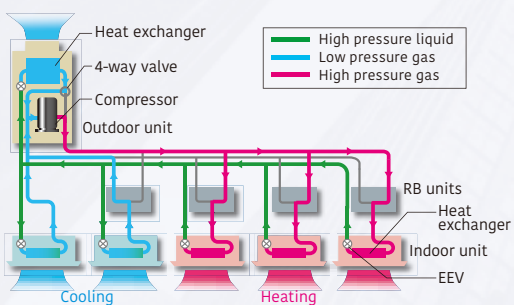


Our heat recovery systems achieve high operating energy efficiency by drawing heat from the room to be cooled and transferring it as energy for rooms that are to be heated.



New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

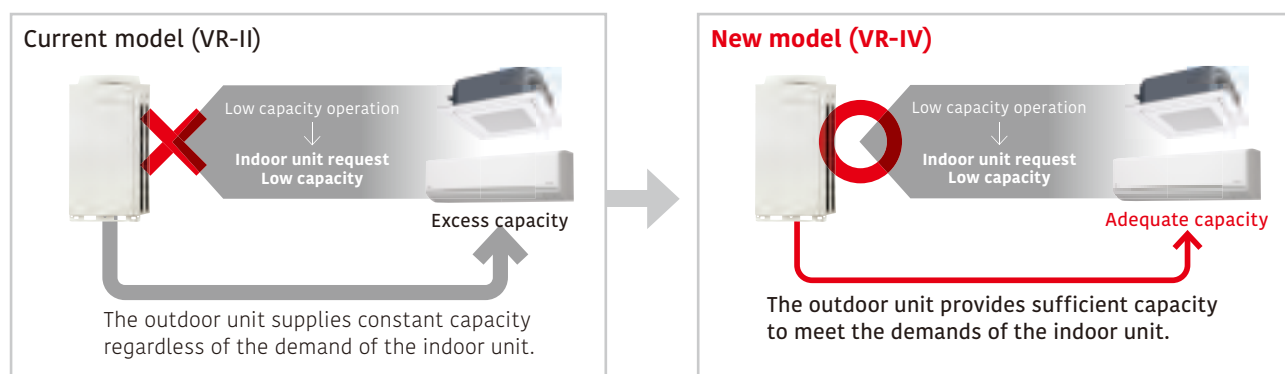

* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.

Increase in the number of connectable indoor units

Capacity range of connectable indoor units

New model (VR-IV)	25%* to 150%
Current model (VR-II)	50% to 150%

*: For modular type, 25% to 49.9% operation in the entire system is available. (by one unit operation)


Increased number of connectable indoor units and space saving combinations

saving combinations (Unit)

HP	10	12	14	16	...	28	30	32	...	48
New model (VR-IV)	21	26	30	34	...	60	64	64	...	64

Current model (VR-II)	15	16	17	21	24	...	42	45	48	...	64
-----------------------	----	----	----	----	----	-----	----	----	----	-----	----

The energy-saving technology that boosted operation efficiency

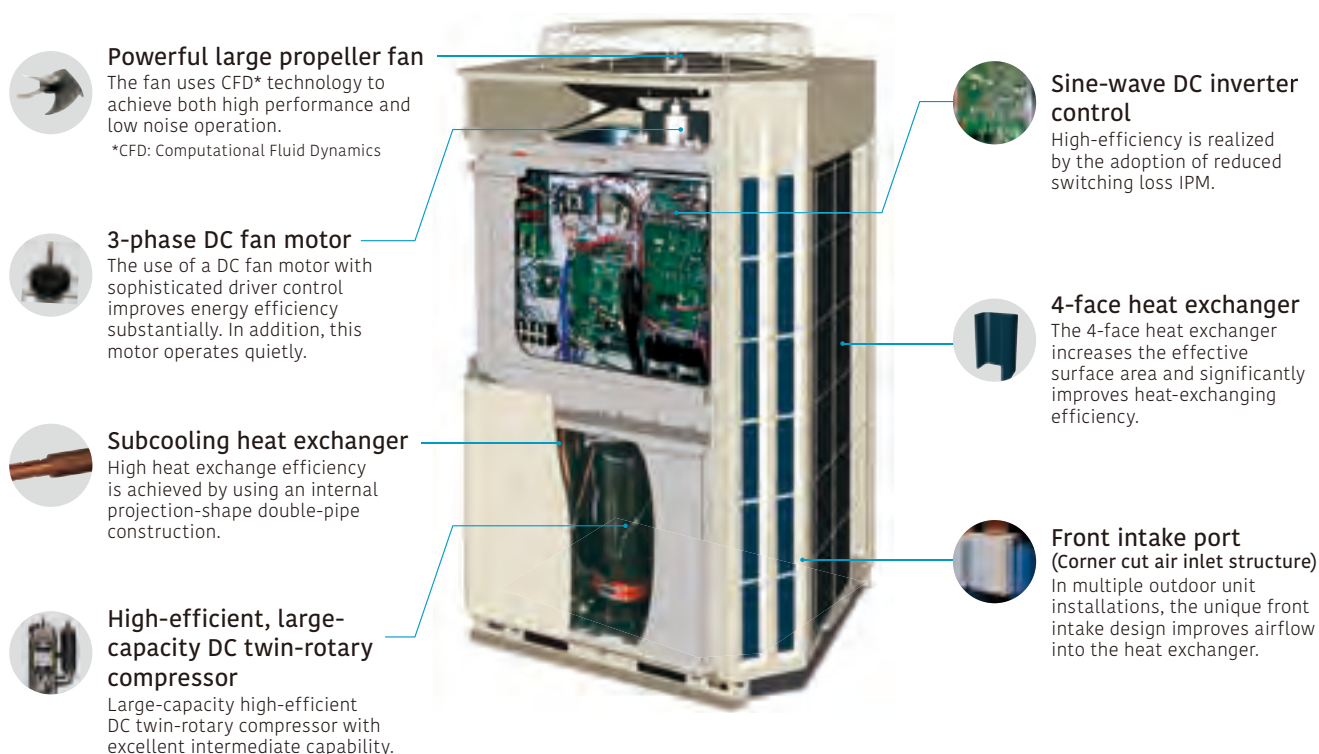

Extended connection ratio (applicable to multiple tenants)


Especially useful when starting partial air conditioning in a building under construction
Installation can be added flexibly for each tenant.



Stand-alone

Current model (VR-II)


Example) 50% of 12HP minimum connected indoor unit capacity is required

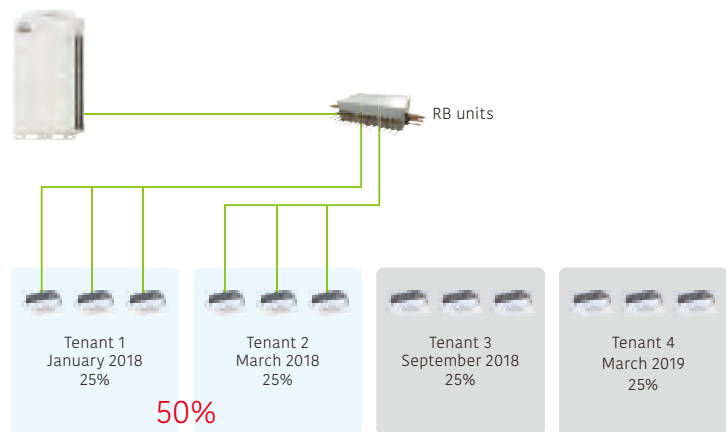

Installation is possible even for tenants who have not yet started operations.

New model (VR-IV)

Example) 25% of 12HP minimum connected indoor unit capacity is required

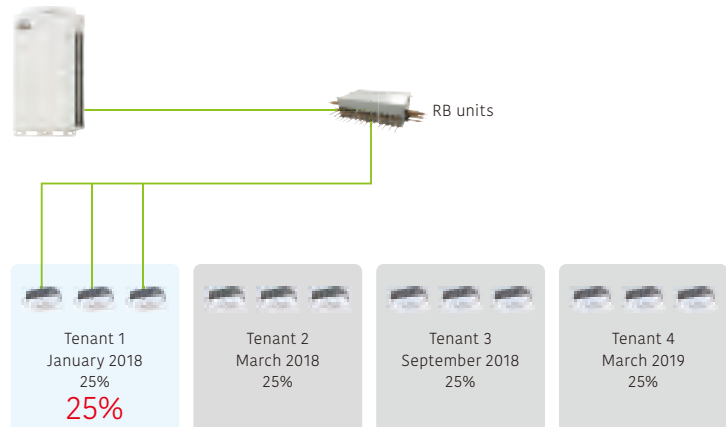


Installation and commissioning can be added flexibly to meet the opening dates of other tenants.

Modular type


One outdoor unit operates effectively for the capacities of connectable indoor units in the entire system. (Each of the multiple outdoor units does not dare to operate at 25% capacity: any one of the outdoor units will operate at 50% and the remaining units will each output 0%, i.e., stop operating.)

Example: One 10HP outdoor unit performs 25% of the total 20HP outdoor units system.
One 10HP outdoor unit performs 50% of its capacity
→ Two outdoor units do not perform 25% of the operation.

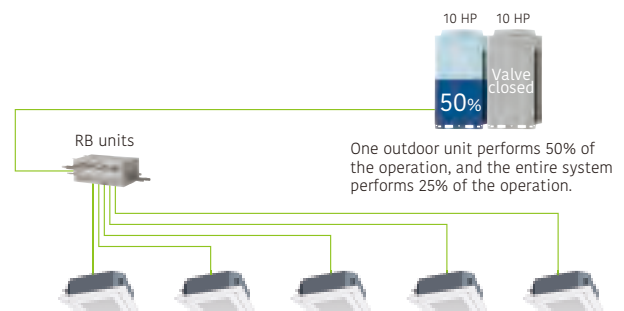

Additional installation is possible without changing the main pipe.

A main pipe of a diameter that can be used for the final system is installed at the beginning of the installation. Duplication of the work will be avoided as there is no need to change the main pipe as in the previous model.

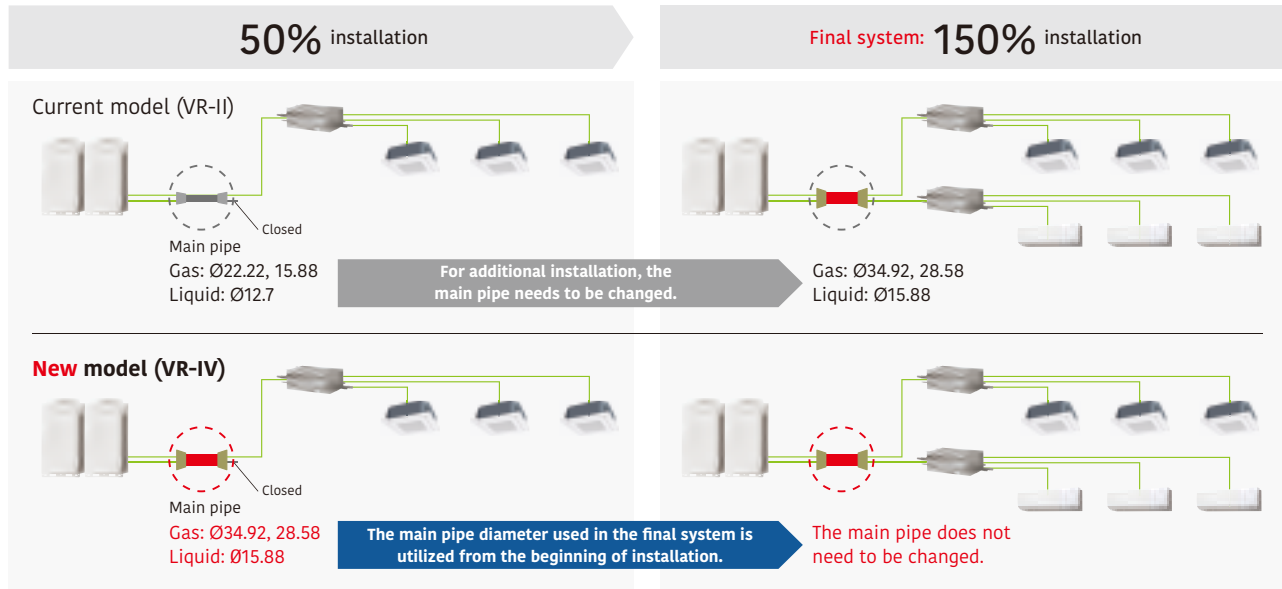

All-inverter compressor


Large-capacity DC inverter compressor

Large-capacity high-efficient DC twin-rotary compressor with excellent intermediate capability.




High-efficiency compressor speed control

The compressor speed control in 0.1 Hz increments ensures a comfortable space with less change in room temperature and less energy loss.

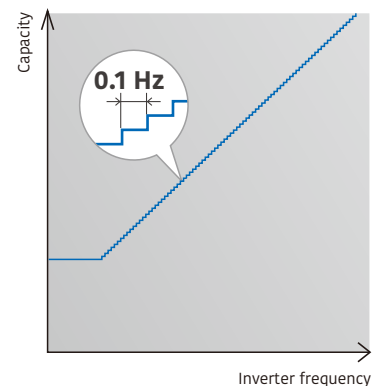

Efficiency in actual operating conditions


Class-leading high COP (Maximum) The use of our proprietary heat exchanger structure and high-efficiency DC twin-rotary compressors achieves the class-leading coefficient of performance (COP) in every combination.

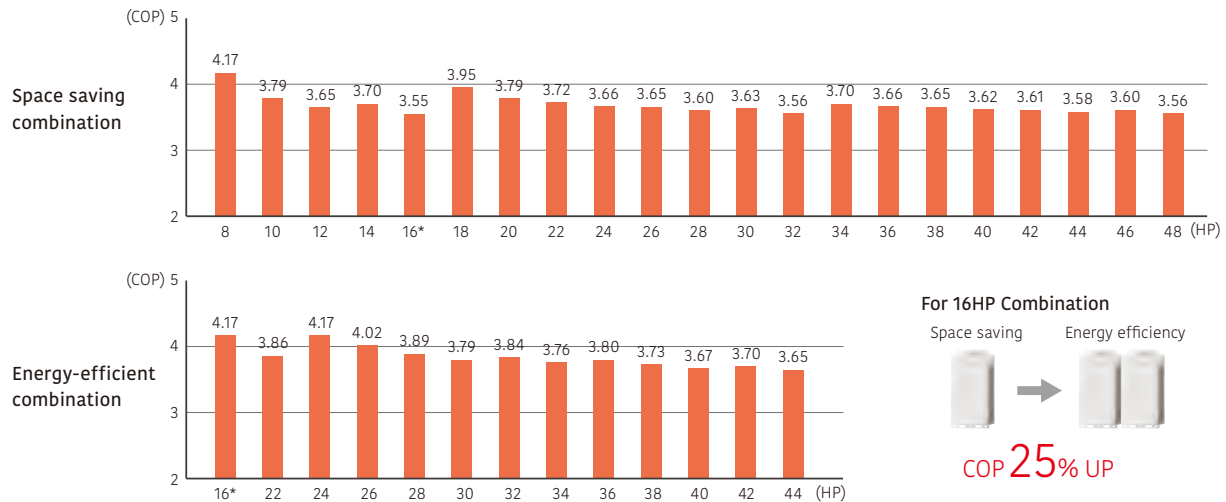

* These specifications are determined by Cassette combination.
* Multiple outdoor units are not certified by Eurovent.


Multiple outdoor operation control

When multiple outdoor units are connected, each compressor carries out sophisticated operation. Instead of operating one compressor at full load to distribute the refrigerant to one heat exchanger, all compressors operate at partial load to distribute the refrigerant to all heat exchangers, thereby improving the efficiency of the entire system.

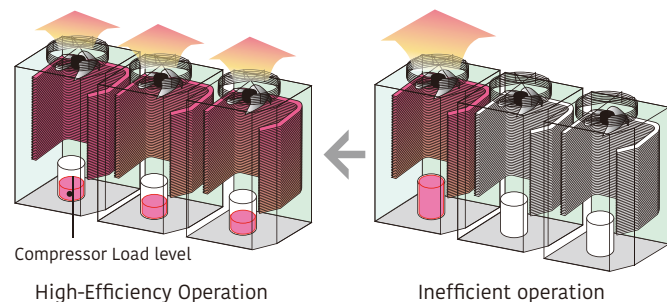


Heat exchanger refrigerant control

The heat exchanger in the outdoor unit is divided into two parts, upper and lower. The efficiency of the heat exchanger has been improved by adopting an optimum refrigerant path control where the refrigerant is distributed more into the top heat exchanger as this is where there is a greater air flow intake.

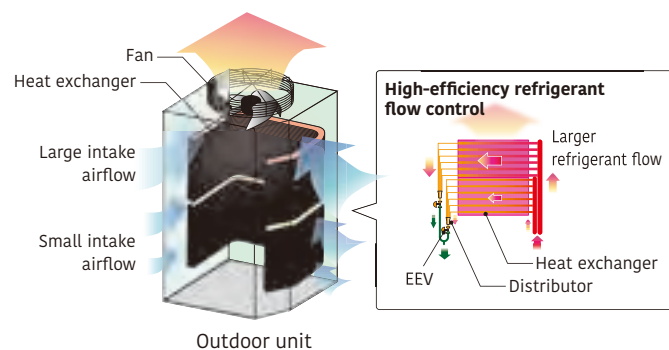

Flexible pipe connection

More flexible refrigerant pipe work is possible due to the use of various piping and RB unit connections, for adjustments to the floor layout and building structure.

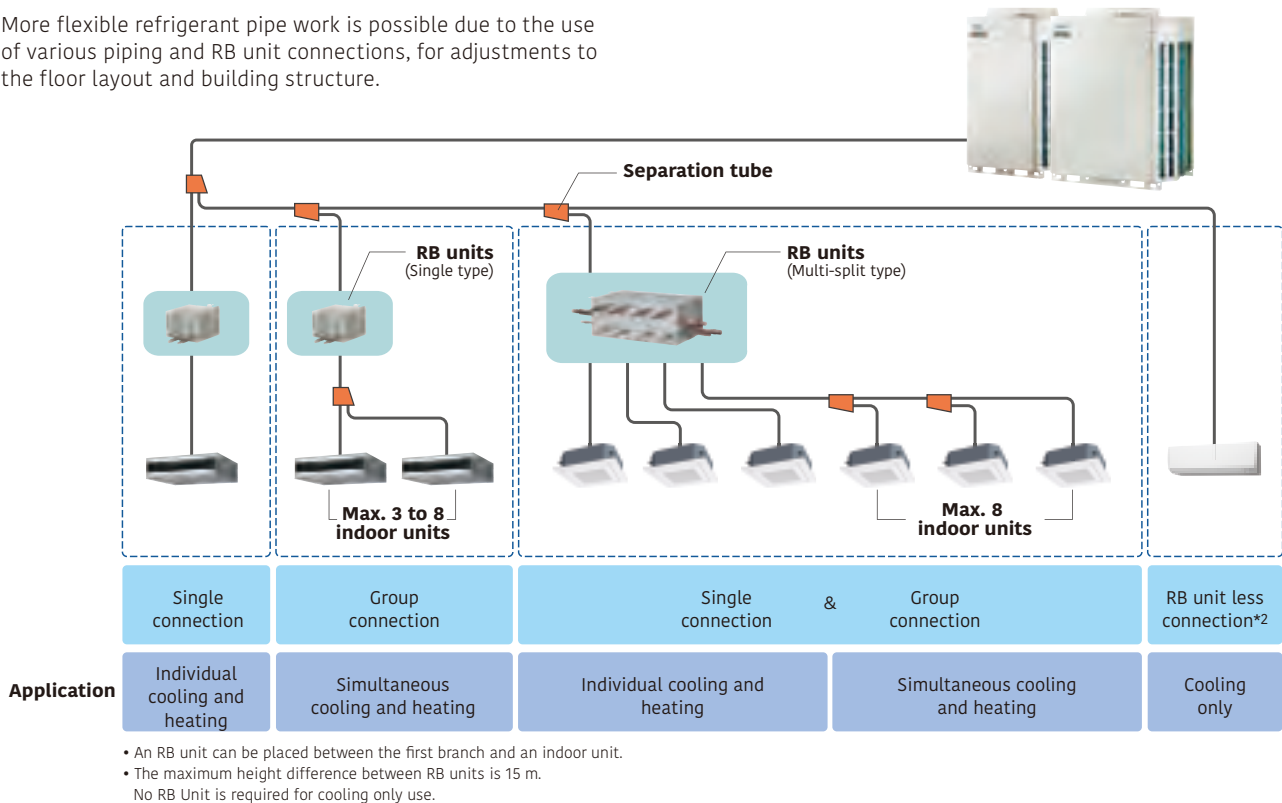

Flexible installation of RB unit

Small and slim design with a height of 198 mm makes it easy to install in tight spaces with height constraints.

- A drain pipe is not required.
- Different positions of a control box can be chosen to accommodate installation conditions.
- Series connection for simplified installation

*: RB unit (single type)



An RB unit can be installed on either side of the control box.



An RB unit can be installed on top of the control box to save space.
 *: RB unit (single type)

• 2-way connection




• Two RB units can be connected in series*.

*: RB unit (Single type/4-branch)




RB units
(Multi-split type/8-branch)



RB units
(Multi-split type/12-branch)


Easy maintenance in tight spaces

Maintenance can be performed from the side.



The electrical box can be accessed and serviced by sliding down the front cover.

Parts can be accessed and replaced easily even in tight spaces inside the ceiling.

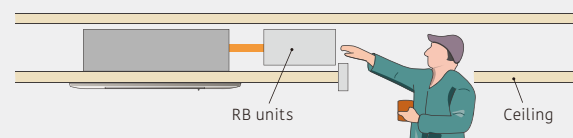

Outdoor units lineup • Combinations other than those listed below are not recommended.

Space saving combination

22.4kW (8HP)  AJY072GALDH UNIT : AJY072GALDH	28.0kW (10HP)  AJY090GALDH UNIT : AJY090GALDH	33.5kW (12HP)  AJY108GALDH UNIT : AJY108GALDH	40.0kW (14HP)  AJY126GALDH UNIT : AJY126GALDH	45.0kW (16HP)  AJY144GALDH UNIT : AJY144GALDH
50.4kW (18HP)  AJY162GALDH UNIT : AJY090/072GALDH	56.0kW (20HP)  AJY180GALDH UNIT : AJY090/090GALDH	61.5kW (22HP)  AJY198GALDH UNIT : AJY108/090GALDH	67.0kW (24HP)  AJY216GALDH UNIT : AJY108/108GALDH	73.0kW (26HP)  AJY234GALDH UNIT : AJY144/090GALDH
78.5kW (28HP)  AJY252GALDH UNIT : AJY144/108GALDH	85.0kW (30HP)  AJY270GALDH UNIT : AJY144/126GALDH	90.0kW (32HP)  AJY288GALDH UNIT : AJY144/144GALDH	95.0kW (34HP)  AJY306GALDH UNIT : AJY108/108/090GALDH	100.5kW (36HP)  AJY324GALDH UNIT : AJY108/108/108GALDH
106.5kW (38HP)  AJY342GALDH UNIT : AJY144/108/090GALDH	112.0kW (40HP)  AJY360GALDH UNIT : AJY144/108/108GALDH	118.0kW (42HP)  AJY378GALDH UNIT : AJY144/144/090GALDH	123.5kW (44HP)  AJY396GALDH UNIT : AJY144/144/108GALDH	130.0kW (46HP)  AJY414GALDH UNIT : AJY144/144/126GALDH
135.0kW (48HP)  AJY432GALDH UNIT : AJY144/144/144GALDH				

Energy efficiency combination

44.8kW (16HP)  AJY144GALDHH UNIT : AJY072/072GALDH	62.4kW (22HP)  AJY198GALDHH UNIT : AJY126/072GALDH	67.2kW (24HP)  AJY216GALDHH UNIT : AJY072/072/072GALDH	72.8kW (26HP)  AJY234GALDHH UNIT : AJY090/072/072GALDH	78.4kW (28HP)  AJY252GALDHH UNIT : AJY090/090/072GALDH
84.0kW (30HP)  AJY270GALDHH UNIT : AJY090/090/090GALDH	90.4kW (32HP)  AJY288GALDHH UNIT : AJY126/090/072GALDH	96.0kW (34HP)  AJY306GALDHH UNIT : AJY126/090/090GALDH	102.4kW (36HP)  AJY324GALDHH UNIT : AJY126/126/072GALDH	108.0kW (38HP)  AJY342GALDHH UNIT : AJY126/126/090GALDH
113.0kW (40HP)  AJY360GALDHH UNIT : AJY144/126/090GALDH	120.0kW (42HP)  AJY378GALDHH UNIT : AJY126/126/126GALDH	125.0kW (44HP)  AJY396GALDHH UNIT : AJY144/126/126GALDH		

8,10,12HP : AJY072GALDH / AJY090GALDH / AJY108GALDH
14,16HP : AJY126GALDH / AJY144GALDH



8, 10, 12 HP




14, 16 HP





Dimensions

(Unit: mm)

8, 10, 12 HP

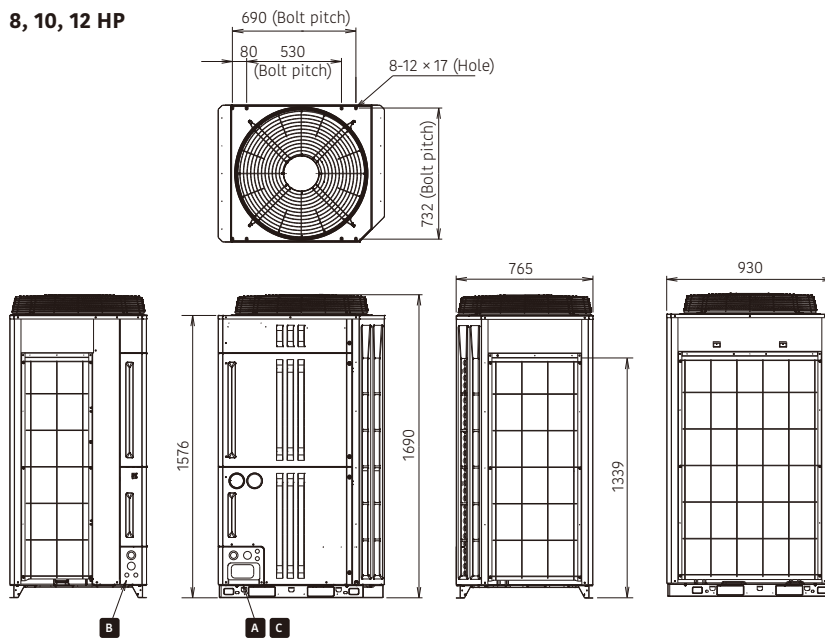

14, 16 HP

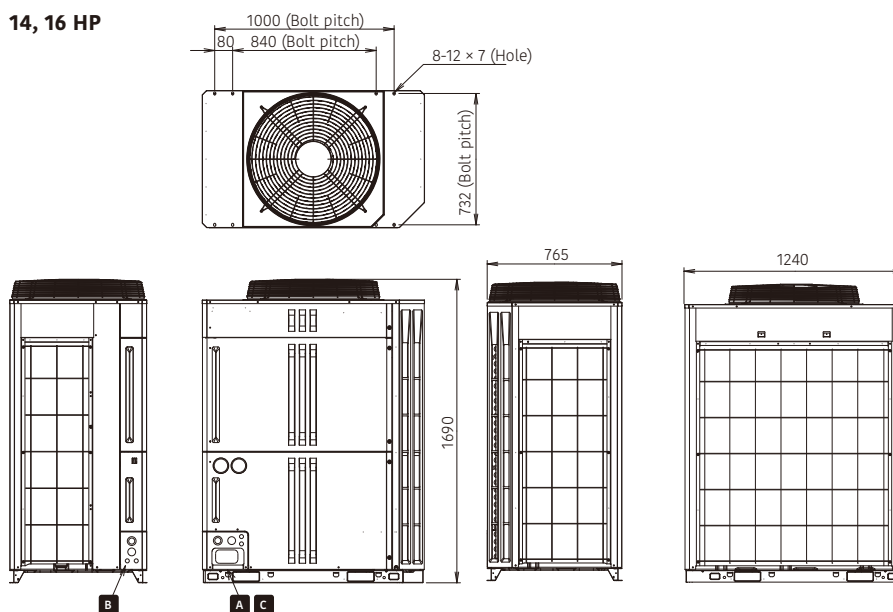

Outdoor units specifications

Space saving combination

Rated capacity range		HP	8	10	12	14	16	18	20	22	24
Model name			AJY072GALDH	AJY090GALDH	AJY108GALDH	AJY126GALDH	AJY144GALDH	AJY162GALDH	AJY180GALDH	AJY198GALDH	AJY216GALDH
Unit 1			AJY072GALDH	AJY090GALDH	AJY108GALDH	AJY126GALDH	AJY144GALDH	AJY090GALDH	AJY090GALDH	AJY108GALDH	AJY108GALDH
Unit 2								AJY072GALDH	AJY090GALDH	AJY090GALDH	
Unit 3											AJY108GALDH
Maximum connectable indoor units*1			17	21	26	30	34	39	43	47	52
Connectable capacity range of indoor units		kW	5.6-33.6	7.0-42.0	8.4-50.2	10.0-60.0	11.3-67.5	12.6-75.6*3	14.0-84.0*3	15.4-92.2*3	16.8-100.5*3
Power source			3-phase, 4-wire, 400 V, 50Hz								
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	61.5	67.0
	Nominal Heating		22.4	28.0	33.5	40.0	42.0	50.4	56.0	61.5	67.0
	Max. Heating		25.0	31.5	37.5	45.0	48.0	56.5	63.0	69.0	75.0
Input power	Cooling	kW	6.26	9.53	11.89	13.16	16.71	15.79	19.06	21.42	23.78
	Nominal Heating		5.37	7.38	9.16	10.80	11.81	12.75	14.76	16.54	18.32
	Max. Heating		6.25	8.96	11.48	13.95	14.98	15.21	17.92	20.44	22.96
EER	Cooling		3.57	2.93	2.81	3.03	2.69	3.19	2.94	2.87	2.82
COP	Nominal Heating	W/W	4.17	3.79	3.65	3.70	3.55	3.95	3.79	3.72	3.66
	Max. Heating		4.00	3.51	3.26	3.22	3.20	3.71	3.52	3.38	3.27
SEER	Cooling		7.16	6.61	6.73	6.76	6.27	6.89	6.61	6.67	6.73
SCOP	Heating		3.78	3.76	3.86	4.31	4.41	3.77	3.76	3.81	3.86
ηc	Cooling	%	283.0	261.0	266.0	267.0	248.0	272.0	261.0	263.5	266.0
ηh	Heating		148.0	147.0	151.0	169.0	173.0	147.5	147.0	149.0	151.0
Air flow rate	High	m³/h	11,100	11,100	11,100	13,000	13,000	11,100×2	11,100×2	11,100×2	11,100×2
Sound pressure level*2/ Power level	Cooling	dB(A)	56 / 77	58 / 78	59 / 79	60 / 82	61 / 82	60 / 81	61 / 81	62 / 82	62 / 82
	Heating		58 / 79	59 / 79	63 / 82	62 / 83	63 / 83	62 / 82	62 / 82	64 / 84	66 / 85
Max. External static pressure		Pa	80	80	80	80	80	80	80	80	80
Compressor motor output		kW	7.5	7.5	7.5	11.0	11.0	7.5 × 2	7.5 × 2	7.5 × 2	7.5 × 2
Heat exchanger fin			Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
Net Dimensions	Height	mm	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690
	Width		930	930	930	1,240	1,240	930 × 2	930 × 2	930 × 2	930 × 2
	Depth		765	765	765	765	765	765	765	765	765
Weight		kg	262	262	262	286	286	262 × 2	262 × 2	262 × 2	262 × 2
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg (CO2eq-T)	11.8 (24.6)	11.8 (24.6)	11.8 (24.6)	11.8 (24.6)	11.8 (24.6)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)
Connection pipe diameter	Liquid	mm	12.70	12.70	12.70	12.70	12.70	15.88	15.88	15.88	15.88
	Discharge Gas		15.88	19.05	19.05	22.22	22.22	22.22	22.22	28.58	28.58
	Suction Gas		22.22	22.22	28.58	28.58	28.58	28.58	28.58	34.92	34.92
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating		-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21
	Cooling/Heating		-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21

Energy Efficiency Combination

Rated capacity range		HP	16	22	24	26	28	30
Model name			AJY144GALDHH	AJY198GALDHH	AJY216GALDHH	AJY234GALDHH	AJY252GALDHH	AJY270GALDHH
Unit 1			AJY072GALDH	AJY126GALDH	AJY072GALDH	AJY090GALDH	AJY090GALDH	AJY090GALDH
Unit 2			AJY072GALDH	AJY072GALDH	AJY072GALDH	AJY072GALDH	AJY090GALDH	AJY090GALDH
Unit 3					AJY072GALDH	AJY072GALDH	AJY072GALDH	AJY090GALDH
Maximum connectable indoor units*1			34	47	52	56	60	64
Connectable capacity range of indoor units		kW	11.2-67.2*3	15.6-93.6*3	16.8-100.8*3	18.2-109.2*3	19.6-117.6*3	21.0-126.0*3
Power source			3-phase, 4-wire, 400 V, 50Hz					
Capacity	Cooling	kW	44.8	62.4	67.2	72.8	78.4	84.0
	Nominal Heating		44.8	62.4	67.2	72.8	78.4	84.0
	Max. Heating		50.0	70.0	75.0	81.5	88.0	94.5
Input power	Cooling	kW	12.52	19.42	18.78	22.05	25.32	28.59
	Nominal Heating		10.74	16.17	16.11	18.12	20.13	22.14
	Max. Heating		12.50	20.20	18.75	21.46	24.17	26.88
EER	Cooling		3.58	3.21	3.58	3.30	3.10	2.94
COP	Nominal Heating	W/W	4.17	3.86	4.17	4.02	3.89	3.79
	Max. Heating		4.00	3.47	4.00	3.80	3.64	3.52
SEER	Cooling		7.16	6.96	7.16	6.98	6.79	6.61
SCOP	Heating		3.78	4.05	3.78	3.77	3.77	3.76
ηc	Cooling	%	283.0	275.0	283.0	275.7	268.3	261.0
ηh	Heating		148.0	158.5	148.0	147.7	147.3	147.0
Air flow rate	High	m³/h	11,100×2	13,000+11,100	11,100×3	11,100×3	11,100×3	11,100×3
Sound pressure level*2/ Power level	Cooling	dB(A)	59 / 80	61 / 83	61 / 82	62 / 82	62 / 82	63 / 83
	Heating		61 / 82	63 / 84	63 / 84	63 / 84	63 / 84	64 / 84
Max. External static pressure		Pa	80	80	80	80	80	80
Compressor motor output		kW	7.5 × 2	11.0 + 7.5	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3
Heat exchanger fin			Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
Net Dimensions	Height	mm	1,690	1,690	1,690	1,690	1,690	1,690
	Width		930 × 2	1,240 + 930	930 × 3	930 × 3	930 × 3	930 × 3
	Depth		765	765	765	765	765	765
Weight		kg	262 × 2	286 + 262	262 × 3	262 × 3	262 × 3	262 × 3
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg (CO2eq-T)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)
Connection pipe diameter	Liquid	mm	12.70	15.88	15.88	15.88	15.88	19.05
	Discharge Gas		22.22	28.58	28.58	28.58	28.58	28.58
	Suction Gas		28.58	34.92	34.92	34.92	34.92	34.92
Operating Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating		-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21
	Cooling/Heating		-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

When cooling operation is conducted at an outdoor air temperature below -5°C,

the outdoor unit must be installed in a position that is higher than or equal to that of the indoor units.

* These specifications are determined by ducted combination.

* Multiple outdoor units are not certified by Eurovent.

26	28	30	32	34	36	38	40	42	44	46	48
AJY234GALDH	AJY252GALDH	AJY270GALDH	AJY288GALDH	AJY306GALDH	AJY324GALDH	AJY342GALDH	AJY360GALDH	AJY378GALDH	AJY396GALDH	AJY414GALDH	AJY432GALDH
AJY144GALDH AJY090GALDH	AJY144GALDH AJY108GALDH	AJY144GALDH AJY126GALDH	AJY144GALDH AJY144GALDH	AJY108GALDH AJY108GALDH AJY090GALDH	AJY108GALDH AJY108GALDH AJY108GALDH	AJY144GALDH AJY108GALDH AJY090GALDH	AJY144GALDH AJY108GALDH AJY108GALDH	AJY144GALDH AJY144GALDH AJY090GALDH	AJY144GALDH AJY144GALDH AJY108GALDH	AJY144GALDH AJY144GALDH AJY126GALDH	AJY144GALDH AJY144GALDH AJY144GALDH
56	60	64	64	64	64	64	64	64	64	64	64
18.3-109.5*3	19.7-117.7*3	21.3-127.5*3	22.5-135.0*3	23.8-142.5*3	25.2-150.7*3	26.7-159.7*3	28.0-168.0*3	29.5-177.0*3	30.9-185.2*3	32.5-195.0*3	33.8-202.5*3

3-phase, 4-wire, 400 V, 50Hz

73.0	78.5	85.0	90.0	95.0	100.5	106.5	112.0	118.0	123.5	130.0	135.0
70.0	75.5	82.0	84.0	95.0	100.5	103.5	109.0	112.0	117.5	124.0	126.0
79.5	85.5	93.0	96.0	106.5	112.5	117.0	123.0	127.5	133.5	141.0	144.0
26.24	28.60	29.87	33.42	33.31	35.67	38.13	40.49	42.95	45.31	46.58	50.13
19.19	20.97	22.61	23.62	25.70	27.48	28.35	30.13	31.00	32.78	34.42	35.43
23.94	26.46	28.93	29.96	31.92	34.44	35.42	37.94	38.92	41.44	43.91	44.94
2.78	2.74	2.85	2.69	2.85	2.82	2.79	2.77	2.75	2.73	2.79	2.69
3.65	3.60	3.63	3.70	3.70	3.66	3.65	3.62	3.61	3.58	3.60	3.56
3.32	3.23	3.21	3.20	3.34	3.27	3.30	3.24	3.28	3.22	3.21	3.20
6.44	6.50	6.52	6.27	6.69	6.73	6.54	6.58	6.38	6.42	6.43	6.27
4.09	4.14	4.36	4.41	3.83	3.86	4.01	4.04	4.19	4.23	4.38	4.41
254.5	257.0	257.5	248.0	264.3	266.0	258.3	260.0	252.3	254.0	254.3	248.0
160.0	162.0	171.0	173.0	149.7	151.0	157.0	158.3	164.3	165.7	171.7	173.0
13,000+11,100	13,000+11,100	13,000×2	13,000×2	11,100×3	11,100×3	13,000+11,100×2	13,000+11,100×2	13,000×2+11,100	13,000×2+11,100	13,000×3	13,000×3
63 / 83	63 / 84	64 / 85	64 / 85	63 / 83	64 / 84	64 / 85	65 / 85	65 / 86	65 / 86	65 / 87	66 / 87
64 / 84	66 / 86	66 / 86	66 / 86	67 / 86	68 / 87	67 / 86	68 / 87	67 / 87	68 / 87	67 / 88	68 / 88
80	80	80	80	80	80	80	80	80	80	80	80
11.0 + 7.5	11.0 + 7.5	11.0 × 2	11.0 × 2	7.5 × 3	7.5 × 3	11.0+7.5 × 2	11.0 + 7.5 × 2	11.0 × 2 + 7.5	11.0 × 2 + 7.5	11.0 × 3	11.0 × 3
Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690
1,240 + 930	1,240 + 930	1,240 × 2	1,240 × 2	930 × 3	930 × 3	1,240 + 930 × 2	1,240 + 930 × 2	1,240 × 2 + 930	1,240 × 2 + 930	1,240 × 3	1,240 × 3
765	765	765	765	765	765	765	765	765	765	765	765
286 + 262	286 + 262	286 × 2	286 × 2	262 × 3	262 × 3	286 + 262 × 2	286 + 262 × 2	286 × 2 + 262	286 × 2 + 262	286 × 3	286 × 3
R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)
15.88	15.88	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05
28.58	28.58	28.58	28.58	28.58	28.58	34.92	34.92	34.92	34.92	34.92	34.92
34.92	34.92	34.92	34.92	34.92	41.27	41.27	41.27	41.27	41.27	41.27	41.27
-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21
-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21

32	34	36	38	40	42	44
AJY288GALDHH	AJY306GALDHH	AJY324GALDHH	AJY342GALDHH	AJY360GALDHH	AJY378GALDHH	AJY396GALDHH
AJY126GALDH AJY090GALDH AJY072GALDH	AJY126GALDH AJY090GALDH AJY090GALDH	AJY126GALDH AJY126GALDH AJY072GALDH	AJY126GALDH AJY126GALDH AJY090GALDH	AJY144GALDH AJY126GALDH AJY090GALDH	AJY126GALDH AJY126GALDH AJY126GALDH	AJY144GALDH AJY126GALDH AJY126GALDH
64	64	64	64	64	64	64
22.6-135.6*3	24.0-144.0*3	25.6-153.6*3	27.0-162.0*3	28.3-169.5*3	30.0-180.0*3	31.3-187.5*3

3-phase, 4-wire, 400 V, 50Hz

90.4	96.0	102.4	108.0	113.0	120.0	125.0
90.4	96.0	102.4	108.0	110.0	120.0	122.0
101.5	108.0	115.0	121.5	124.5	135.0	138.0
28.95	32.22	32.58	35.85	39.40	39.48	43.03
23.55	25.56	26.97	28.98	29.99	32.40	33.41
29.16	31.87	34.15	36.86	37.89	41.85	42.88
3.12	2.98	3.14	3.01	2.87	3.04	2.90
3.84	3.76	3.80	3.73	3.67	3.70	3.65
3.48	3.39	3.37	3.30	3.29	3.23	3.22
6.84	6.66	6.89	6.71	6.55	6.76	6.60
3.95	3.94	4.13	4.13	4.16	4.31	4.34
270.3	263.0	272.3	265.0	258.7	267.0	260.7
154.7	154.3	162.0	161.7	163.0	169.0	170.3
13,000+11,100×2	13,000+11,100×2	13,000×2+11,100	13,000×2+11,100	13,000×2+11,100	13,000×3	13,000×3
63 / 84	64 / 85	64 / 86	64 / 86	65 / 86	65 / 87	65 / 87
65 / 86	65 / 86	66 / 87	66 / 87	66 / 87	67 / 88	67 / 88
80	80	80	80	80	80	80
11.0 + 7.5 × 2	11.0 + 7.5 × 2	11.0 × 2 + 7.5	11.0 × 2 + 7.5	11.0 × 2 + 7.5	11.0 × 3	11.0 × 3
Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
1,690	1,690	1,690	1,690	1,690	1,690	1,690
1,240 + 930 × 2	1,240 + 930 × 2	1,240 × 2 + 930	1,240 × 2 + 930	1,240 × 2 + 930	1,240 × 3	1,240 × 3
765	765	765	765	765	765	765
286 + 262 × 2	286 + 262 × 2	286 × 2 + 262	286 × 2 + 262	286 × 2 + 262	286 × 3	286 × 3
R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)
19.05	19.05	19.05	19.05	19.05	19.05	19.05
28.58	28.58	28.58	34.92	34.92	34.92	34.92
34.92	34.92	41.27	41.27	41.27	41.27	41.27
-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21
-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21	-10 to 21

*1: Minimum connectable indoor unit number is 2.

*2: The noise level is the value measured in an anechoic room. When measured in an actual installation, the measured value is typically larger than the indicated value due to ambient noise and reflections.

*3: If the capacity range of the connectable indoor units is between 25% and 49.9%, do not open the three-way valve except for the unit to be operated. In addition, do not connect the power line.




Heat Pump

Modular type

VRF V-IV

System configuration example


- Suitable for air conditioning midsize and large buildings. Connecting each outdoor unit makes it possible to create a high-capacity system.
- Multiple indoor units are connected with separation tubes and headers.

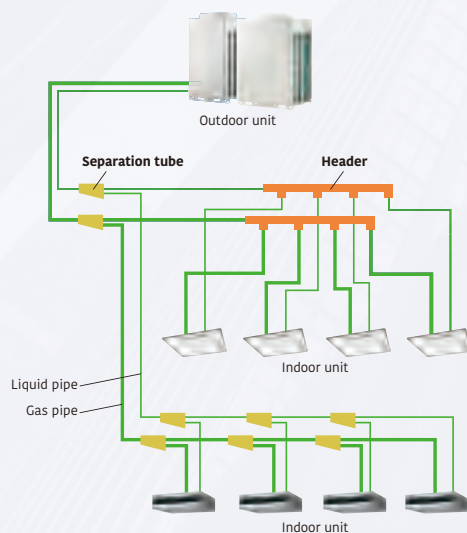

New intelligent refrigerant control

Fujitsu General is proposing outdoor units equipped with refrigerant control function.


The refrigerant control operates with subtle control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

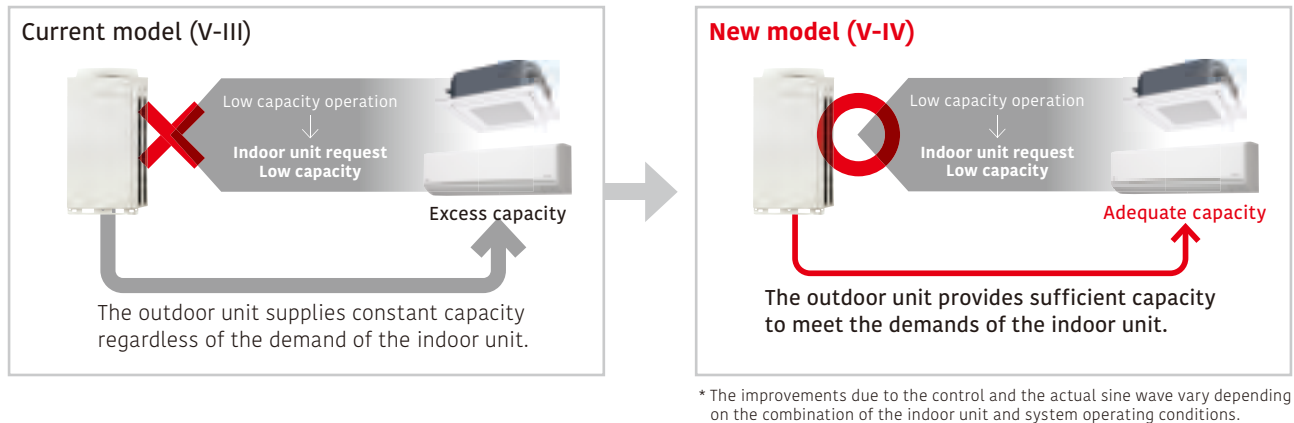

Efficiency in actual operating conditions


The use of our proprietary heat exchanger structure and high-efficiency DC twin-rotary compressors achieves the class-leading coefficient of performance (COP) in every combination.

Space saving combination

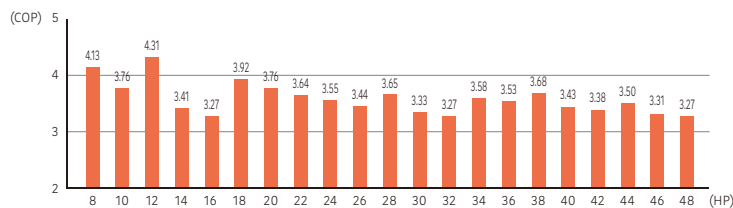


* These specifications are determined by Cassette combination.

Energy efficiency combination

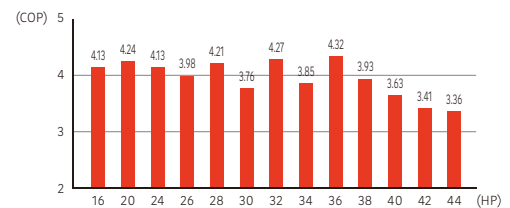

*Multiple outdoor units are not certified by Eurovent.

The energy-saving technology that boosted operation efficiency

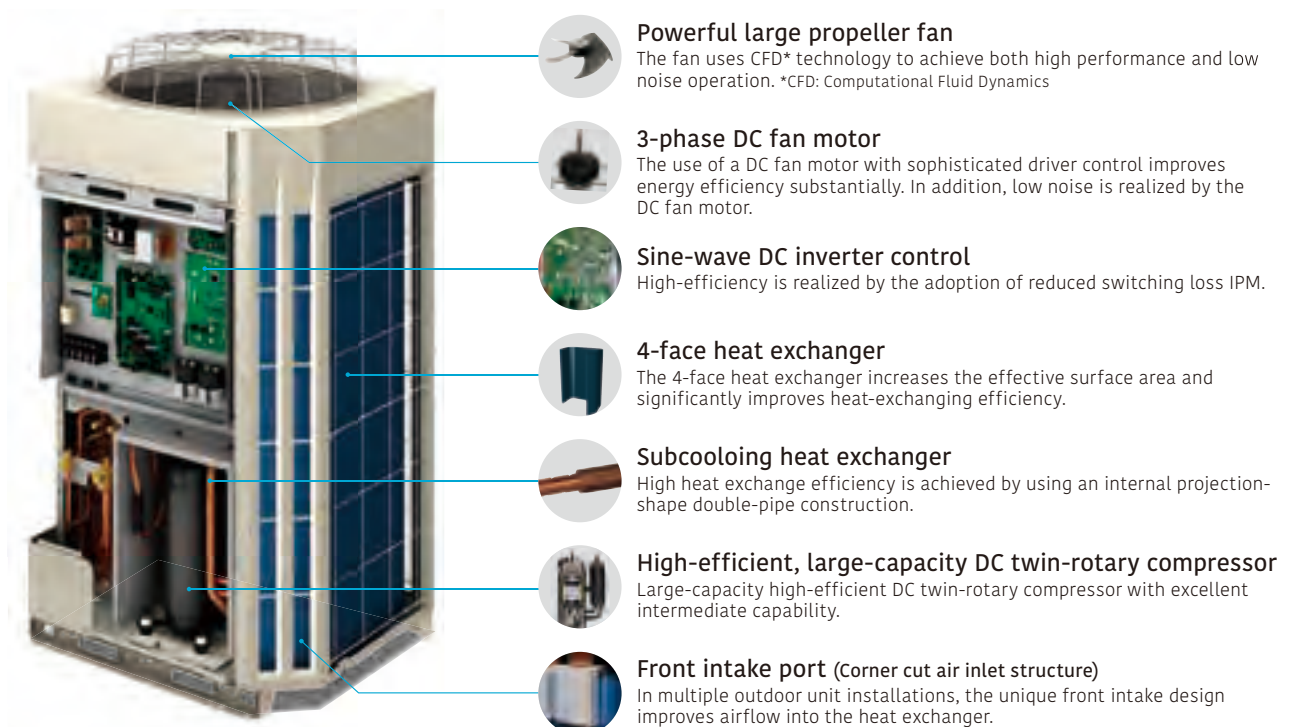

Outdoor units lineup • Combinations other than those listed below are not recommended.

Space saving combination

22.4 kW (8 HP)  AJY072LALDH UNIT: AJY072LALDH	28.0 kW (10 HP)  AJY090LALDH UNIT: AJY090LALDH	33.5 kW (12 HP)  AJY108LALDH UNIT: AJY108LALDH	40.0 kW (14 HP)  AJY126LALDH UNIT: AJY126LALDH	45.0 kW (16 HP)  AJY144LALDH UNIT: AJY144LALDH
50.4 kW (18 HP)  AJY162LALDH UNIT: AJY090/072LALDH	56.0 kW (20 HP)  AJY180LALDH UNIT: AJY090/090LALDH	62.4 kW (22 HP)  AJY198LALDH UNIT: AJY126/072LALDH	68.0 kW (24 HP)  AJY216LALDH UNIT: AJY126/090LALDH	73.0 kW (26 HP)  AJY234LALDH UNIT: AJY144/090LALDH
78.5 kW (28 HP)  AJY252LALDH UNIT: AJY144/108LALDH	85.0 kW (30 HP)  AJY270LALDH UNIT: AJY144/126LALDH	90.0 kW (32 HP)  AJY288LALDH UNIT: AJY144/144LALDH	95.4 kW (34 HP)  AJY306LALDH UNIT: AJY144/090/072LALDH	101.0 kW (36 HP)  AJY324LALDH UNIT: AJY144/090/090LALDH
106.5 kW (38 HP)  AJY342LALDH UNIT: AJY144/108/090LALDH	113.0 kW (40 HP)  AJY360LALDH UNIT: AJY144/126/090LALDH	118.0 kW (42 HP)  AJY378LALDH UNIT: AJY144/144/090LALDH	123.5 kW (44 HP)  AJY396LALDH UNIT: AJY144/144/108LALDH	130.0 kW (46 HP)  AJY414LALDH UNIT: AJY144/144/126LALDH
135.0 kW (48 HP)  AJY432LALDH UNIT: AJY144/144/144LALDH				

Energy efficiency combination

44.8 kW (16 HP)  AJY144LALDHH UNIT: AJY072/072LALDH	55.9 kW (20 HP)  AJY180LALDHH UNIT: AJY108/072LALDH	67.2 kW (24 HP)  AJY216LALDHH UNIT: AJY072/072/072LALDH	72.8 kW (26 HP)  AJY234LALDHH UNIT: AJY090/072/072LALDH	78.3 kW (28 HP)  AJY252LALDHH UNIT: AJY108/072/072LALDH
84.8 kW (30 HP)  AJY270LALDHH UNIT: AJY126/072/072LALDH	89.4 kW (32 HP)  AJY288LALDHH UNIT: AJY108/108/072LALDH	95.9 kW (34 HP)  AJY306LALDHH UNIT: AJY126/108/072LALDH	100.5 kW (36 HP)  AJY324LALDHH UNIT: AJY108/108/108LALDH	107.0 kW (38 HP)  AJY342LALDHH UNIT: AJY126/108/108LALDH
113.5 kW (40 HP)  AJY360LALDHH UNIT: AJY126/126/108LALDH	120.0 kW (42 HP)  AJY378LALDHH UNIT: AJY126/126/126LALDH	125.0 kW (44 HP)  AJY396LALDHH UNIT: AJY144/126/126LALDH		

8, 10 HP: AJY072LALDH / AJY090LALDH
12, 14, 16 HP: AJY108LALDH / AJY126LALDH / AJY144LALDH




12, 14, 16 HP





Dimensions

(Unit: mm)

8, 10 HP

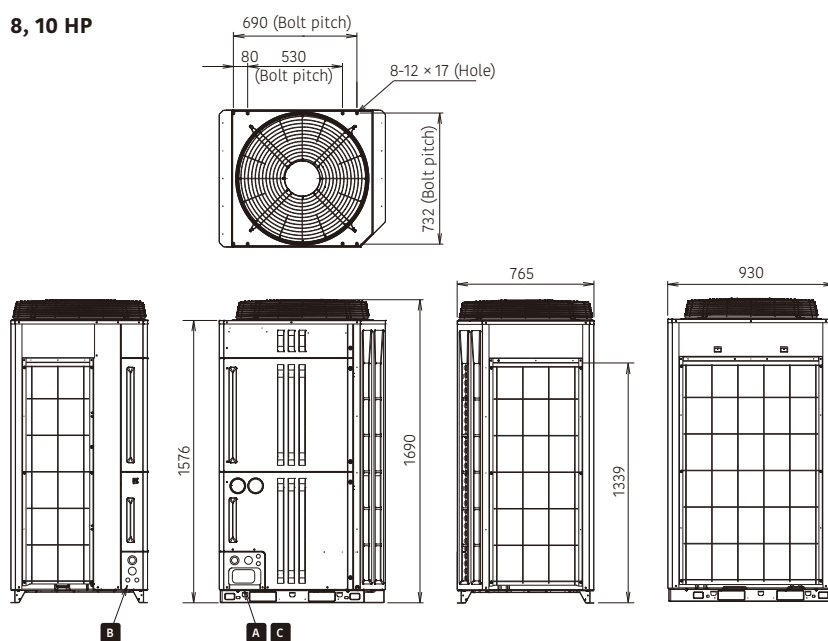

12, 14, 16 HP

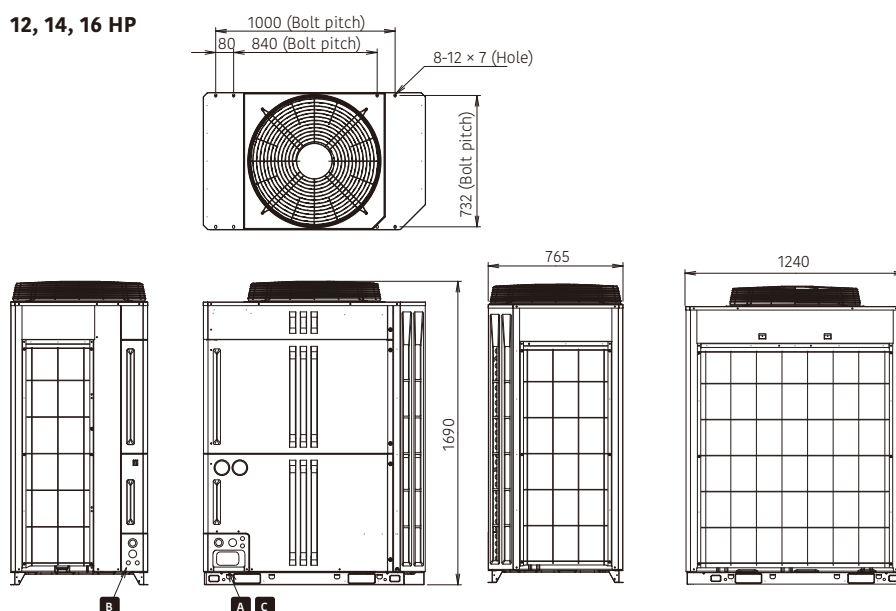

Outdoor unit specifications

Space saving combination

Rated capacity range		HP	8	10	12	14	16	18	20	22	24
Model name			AJY072LALDH	AJY090LALDH	AJY108LALDH	AJY126LALDH	AJY144LALDH	AJY162LALDH	AJY180LALDH	AJY198LALDH	AJY216LALDH
Unit 1			AJY072LALDH	AJY090LALDH	AJY108LALDH	AJY126LALDH	AJY144LALDH	AJY090LALDH	AJY090LALDH	AJY126LALDH	AJY126LALDH
Unit 2								AJY072LALDH	AJY090LALDH	AJY072LALDH	AJY090LALDH
Unit 3											
Maximum connectable indoor units*1			17	21	26	30	34	39	43	47	52
Connectable capacity range of indoor units		kW	11.2-33.6	14.0-42.0	16.8-50.2	20.0-60.0	22.5-67.5	25.2-75.6	28.0-84.0	31.2-93.6	34.0-102.0
Power source			3-phase, 4-wire, ~400 V, 50 Hz								
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.4	56.0	62.4	68.0
	Nominal Heating		22.4	28.0	33.5	40.0	45.0	50.4	56.0	62.4	68.0
	Max. Heating		25.0	31.5	37.5	45.0	48.0	56.5	63.0	70.0	76.5
Input power	Cooling	kW	5.95	9.06	9.54	13.18	16.74	15.01	18.12	19.13	22.24
	Nominal Heating		5.42	7.44	7.76	11.74	13.76	12.86	14.88	17.16	19.18
	Max. Heating		6.26	8.98	9.48	14.00	15.02	15.24	17.96	20.26	22.98
EER	Cooling	W/W	3.76	3.09	3.51	3.03	2.68	3.36	3.09	3.26	3.06
COP	Nominal Heating		4.13	3.76	4.31	3.41	3.27	3.92	3.76	3.64	3.55
	Max. Heating		3.99	3.50	3.95	3.21	3.19	3.71	3.51	3.46	3.33
SEER	Cooling		7.09	6.56	7.33	6.67	6.18	6.83	6.56	6.64	6.62
SCOP	Heating		3.83	3.80	4.19	4.19	4.27	3.82	3.80	4.05	4.00
ηc	Cooling	%	281.0	259.0	290.0	264.0	244.0	270.0	259.0	262.5	261.5
ηh	Heating		150.0	149.0	165.0	165.0	168.0	149.5	149.0	159.0	157.0
Air flow rate	High	m³/h	11,100	11,100	13,000	13,000	13,700	11,100×2	11,100 × 2	13,000 + 11,100	13,000 + 11,100
Sound pressure level*2/ Power level	Cooling	dB(A)	58 / 79	58 / 79	58 / 81	62 / 84	63 / 86	61 / 82	61 / 82	63 / 85	63 / 85
	Heating		59 / 80	60 / 81	60 / 83	64 / 85	65 / 87	63 / 84	63 / 84	65 / 86	65 / 86
Max. External static pressure		Pa	82	82	82	82	82	82	82	82	82
Compressor motor output		kW	7.5	7.5	11.0	11.0	11.0	7.5×2	7.5 × 2	11.0 + 7.5	11.0 + 7.5
Heat exchanger fin			Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
Net Dimensions	Height	mm	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690
	Width		930	930	1,240	1,240	1,240	930 × 2	930 × 2	1,240 + 930	1,240 + 930
	Depth		765	765	765	765	765	765	765	765	765
Weight		kg	252	252	275	275	275	252 × 2	252 × 2	275 + 252	275 + 252
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg (CO2eq-T)	11.7 (24.4)	11.7 (24.4)	11.8 (24.6)	11.8 (24.6)	11.8 (24.6)	11.7 × 2 (24.4 × 2)	11.7 × 2 (24.4 × 2)	11.8 + 11.7 (24.6 + 24.4)	11.8 + 11.7 (24.6 + 24.4)
Connection pipe diameter	Liquid	mm	12.70	12.70	12.70	12.70	12.70	15.88	15.88	15.88	15.88
	Gas		22.22	22.22	28.58	28.58	28.58	28.58	28.58	34.92	34.92
Operating Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46
	Heating		-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21

Energy Efficiency Combination

Rated capacity range		HP	16	20	24	26	28	30
Model name			AJY144LALDHH	AJY180LALDHH	AJY216LALDHH	AJY234LALDHH	AJY252LALDHH	AJY270LALDHH
Unit 1			AJY072LALDH	AJY108LALDH	AJY072LALDH	AJY090LALDH	AJY108LALDH	AJY126LALDH
Unit 2			AJY072LALDH	AJY072LALDH	AJY072LALDH	AJY072LALDH	AJY072LALDH	AJY072LALDH
Unit 3								
Maximum connectable indoor units*1			34	43	52	56	60	64
Connectable capacity range of indoor units		kW	22.4-67.2	28.0-83.8	33.6-100.8	36.4-109.2	39.2-117.4	42.4-127.2
Power source			3-phase, 4-wire, ~400 V, 50 Hz					
Capacity	Cooling	kW	44.8	55.9	67.2	72.8	78.3	84.8
	Nominal Heating		44.8	55.9	67.2	72.8	78.3	84.8
	Max. Heating		50.0	62.5	75.0	81.5	87.5	95.0
Input power	Cooling	kW	11.90	15.49	17.85	20.96	21.44	25.08
	Nominal Heating		10.84	13.18	16.26	18.28	18.60	22.58
	Max. Heating		12.52	15.74	18.78	21.50	22.00	26.52
EER	Cooling	W/W	3.76	3.61	3.76	3.47	3.65	3.38
COP	Nominal Heating		4.13	4.24	4.13	3.98	4.21	3.76
	Max. Heating		3.99	3.97	3.99	3.79	3.98	3.58
SEER	Cooling		7.09	7.21	7.09	6.91	7.17	6.79
SCOP	Heating		3.83	4.01	3.83	3.82	3.95	3.98
ηc	Cooling	%	281.0	285.5	281.0	273.7	284.0	275.3
ηh	Heating		150.0	157.5	150.0	149.7	155.0	155.0
Air flow rate	High	m³/h	11,100 × 2	13,000 + 11,100	11,100 × 3	11,000 × 3	13,000 + 11,100 × 2	13,000 + 11,100 × 2
Sound pressure level*2/ Power level	Cooling	dB(A)	61 / 82	61 / 83	63 / 84	63 / 84	63 / 85	65 / 86
	Heating		62 / 83	63 / 85	64 / 85	64 / 85	64 / 86	66 / 87
Max. External static pressure		Pa	82	82	82	82	82	82
Compressor motor output		kW	7.5 × 2	11.0 + 7.5	7.5 × 3	7.5 × 3	11.0 + 7.5 × 2	11.0 + 7.5 × 2
Heat exchanger fin			Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
Net Dimensions	Height	mm	1,690	1,690	1,690	1,690	1,690	1,690
	Width		930 × 2	1,240 + 930	930 × 3	930 × 3	1,240 + 930 × 2	1,240 + 930 × 2
	Depth		765	765	765	765	765	765
Weight		kg	252 × 2	275 + 252	252 × 3	252 × 3	275 + 252 × 2	275 + 252 × 2
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
	Charge	kg (CO2eq-T)	11.7 × 2 (24.4 × 2)	11.8 + 11.7 (24.6 + 24.4)	11.7 × 3 (24.4 × 3)	11.7 × 3 (24.4 × 3)	11.8 + 11.7 × 2 (24.6 + 24.4 × 2)	11.8 + 11.7 × 2 (24.6 + 24.4 × 2)
Connection pipe diameter	Liquid	mm	12.70	15.88	15.88	15.88	15.88	19.05
	Gas		28.58	28.58	34.92	34.92	34.92	34.92
Operating Range	Cooling	°CDB	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46
	Heating		-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m.

When cooling operation is conducted at an outdoor air temperature below -5°C,

the outdoor unit must be installed in a position that is higher than or equal to that of the indoor units.

*These specifications are determined by ducted combination.

*Multiple outdoor units are not certified by Eurovent.

26	28	30	32	34	36	38	40	42	44	46	48
AJY234LALDH	AJY252LALDH	AJY270LALDH	AJY288LALDH	AJY306LALDH	AJY324LALDH	AJY342LALDH	AJY360LALDH	AJY378LALDH	AJY396LALDH	AJY414LALDH	AJY432LALDH
AJY144LALDH AJY090LALDH	AJY144LALDH AJY108LALDH	AJY144LALDH AJY126LALDH	AJY144LALDH AJY144LALDH	AJY144LALDH AJY090LALDH AJY072LALDH	AJY144LALDH AJY090LALDH AJY090LALDH	AJY144LALDH AJY108LALDH AJY090LALDH	AJY144LALDH AJY126LALDH AJY090LALDH	AJY144LALDH AJY144LALDH AJY090LALDH	AJY144LALDH AJY144LALDH AJY108LALDH	AJY144LALDH AJY144LALDH AJY126LALDH	AJY144LALDH AJY144LALDH AJY144LALDH
56	60	64	64	64	64	64	64	64	64	64	64
36.5-109.5	39.3-117.7	42.5-127.5	45.0-135.0	47.7-143.1	50.5-151.5	53.3-159.7	56.5-169.5	59.0-177.0	61.8-185.2	65.0-195.0	67.5-202.5
3-phase, 4-wire, ~400 V, 50 Hz											
73.0	78.5	85.0	90.0	95.4	101.0	106.5	113.0	118.0	123.5	130.0	135.0
73.0	78.5	85.0	90.0	95.4	101.0	106.5	113.0	118.0	123.5	130.0	135.0
79.5	85.5	93.0	96.0	104.5	111.0	117.0	124.5	127.5	133.5	141.0	144.0
25.80	26.28	29.92	33.48	31.75	34.86	35.34	38.98	42.54	43.02	46.66	50.22
21.20	21.52	25.50	27.52	26.62	28.64	28.96	32.94	34.96	35.28	39.26	41.28
24.00	24.50	29.02	30.04	30.26	32.98	33.48	38.00	39.02	39.52	44.04	45.06
2.83	2.99	2.84	2.69	3.00	2.90	3.01	2.90	2.77	2.87	2.79	2.69
3.44	3.65	3.33	3.27	3.58	3.53	3.68	3.43	3.38	3.50	3.31	3.27
3.31	3.49	3.20	3.20	3.45	3.37	3.49	3.28	3.27	3.38	3.20	3.20
6.37	6.76	6.43	6.18	6.61	6.43	6.69	6.47	6.31	6.56	6.34	6.18
4.04	4.23	4.23	4.27	3.97	3.96	4.09	4.09	4.11	4.24	4.24	4.27
251.5	267.0	254.0	244.0	261.3	254.0	264.3	255.7	249.0	259.3	250.7	244.0
158.5	166.5	166.5	168.0	155.7	155.3	160.7	160.7	161.7	167.0	167.0	168.0
13,700 + 11,100	13,700 + 13,000	13,700 + 13,000	13,700 × 2	13,700+11,100×2	13,700+11,100×2	13,700+13,000+11,100	13,700 + 13,000 + 11,100	13,700 × 2 + 11,100	13,700×2+13,000	13,700×2+13,000	13,700 × 3
64 / 87	64 / 87	66 / 88	66 / 89	65 / 87	65 / 87	65 / 88	66 / 89	67 / 89	67 / 90	67 / 90	68 / 91
66 / 88	66 / 88	68 / 89	68 / 90	67 / 89	67 / 89	67 / 89	68 / 90	69 / 91	69 / 91	69 / 91	70 / 92
82	82	82	82	82	82	82	82	82	82	82	82
11.0 × 7.5	11.0×2	11.0 × 2	11.0 × 2	11.0+7.5×2	11.0+7.5×2	11.0 × 2 + 7.5	11.0 × 2 + 7.5	11.0 × 2 + 7.5	11.0×3	11.0×3	11.0×3
Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690
1,240 × 930	1,240 × 2	1,240 × 2	1,240 × 2	1,240 × 930 × 2	1,240 × 930 × 2	1,240 × 2 + 930	1,240 × 2 + 930	1,240 × 2 + 930	1,240 × 2 + 930	1,240 × 3	1,240 × 3
765	765	765	765	765	765	765	765	765	765	765	765
275 × 252	275 × 2	275 × 2	275 × 2	275 + 252 × 2	275 + 252 × 2	275 × 2 + 252	275 × 2 + 252	275 × 2 + 252	275 × 3	275 × 3	275 × 3
R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
11.8 × 11.7 (24.6 × 24.4)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 × 2 (24.6 × 2)	11.8 + 11.7 × 2 (24.6 + 24.4 × 2)	11.8 + 11.7 × 2 (24.6 + 24.4 × 2)	11.8 × 2 + 11.7 (24.6 × 2 + 24.4)	11.8 × 2 + 11.7 (24.6 × 2 + 24.4)	11.8 × 2 + 11.7 (24.6 × 2 + 24.4)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)
15.88	15.88	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05
34.92	34.92	34.92	34.92	34.92	41.27	41.27	41.27	41.27	41.27	41.27	41.27
-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46
-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21

32	34	36	38	40	42	44
AJY288LALDHH	AJY306LALDHH	AJY324LALDHH	AJY342LALDHH	AJY360LALDHH	AJY378LALDHH	AJY396LALDHH
AJY108LALDH AJY108LALDH AJY072LALDH	AJY126LALDH AJY108LALDH AJY072LALDH	AJY108LALDH AJY108LALDH AJY108LALDH	AJY126LALDH AJY108LALDH AJY108LALDH	AJY126LALDH AJY126LALDH AJY108LALDH	AJY126LALDH AJY126LALDH AJY126LALDH	AJY144LALDH AJY126LALDH AJY126LALDH
64	64	64	64	64	64	64
44.7-134.1	48.0-143.8	50.3-150.7	53.5-160.5	56.8-170.2	60.0-180.0	62.5-187.5
3-phase, 4-wire, ~400 V, 50 Hz						
89.4	95.9	100.5	107.0	113.5	120.0	125.0
89.4	95.9	100.5	107.0	113.5	120.0	125.0
100.0	107.5	112.5	120.0	127.5	135.0	138.0
25.03	28.67	28.62	32.26	35.90	39.54	43.10
20.94	24.92	23.28	27.26	31.24	35.22	37.24
25.22	29.74	28.44	32.96	37.48	42.00	43.02
3.57	3.34	3.51	3.32	3.16	3.03	2.90
4.27	3.85	4.32	3.93	3.63	3.41	3.36
3.97	3.61	3.96	3.64	3.40	3.21	3.21
7.25	7.03	7.33	7.11	6.89	6.67	6.51
4.07	4.07	4.19	4.19	4.19	4.19	4.22
287.0	278.3	290.0	281.3	272.7	264.0	257.3
160.0	160.0	165.0	165.0	165.0	165.0	166.0
13,000 × 2 + 11,100	13,000 × 2 + 11,100	13,000 × 3	13,000 × 3	13,000 × 3	13,000 × 3	13,700 + 13,000 × 2
63 / 85	65 / 87	63 / 86	65 / 87	66 / 88	67 / 89	67 / 90
64 / 87	66 / 88	65 / 88	67 / 89	68 / 89	69 / 90	69 / 91
82	82	82	82	82	82	82
11.0 × 2 + 7.5	11.0 × 2 + 7.5	11.0 × 3	11.0 × 3	11.0 × 3	11.0 × 3	11.0 × 3
Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin
1,690	1,690	1,690	1,690	1,690	1,690	1,690
1,240 × 2 + 930	1,240 × 2 + 930	1,240 × 3	1,240 × 3	1,240 × 3	1,240 × 3	1,240 × 3
765	765	765	765	765	765	765
275 × 2 + 252	275 × 2 + 252	275 × 3	275 × 3	275 × 3	275 × 3	275 × 3
R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)
11.8 × 2 + 11.7 (24.6 × 2 + 24.4)	11.8 × 2 + 11.7 (24.6 × 2 + 24.4)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)	11.8 × 3 (24.6 × 3)
19.05	19.05	19.05	19.05	19.05	19.05	19.05
34.92	34.92	41.27	41.27	41.27	41.27	41.27
-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46	-5 to 46
-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21

*1 Minimum connectable indoor unit number is 2.

However, the ARXC72 and ARXC90 can be used with a signal connection.

*2 The noise level is the value measured in an anechoic room.

When measured in an actual installation, the measured value is typically larger than the indicated value due to ambient noise and reflections.

* These specifications are determined by ducted combination.

VRF INDOOR UNITS

17 types and 95 models available to meet the requirements of any building design.

Indoor units for the VRF Systems are compact, highly efficient, quiet, and user-friendly. Fujitsu General offers a variety of types and capacities for its indoor units that are easy to install and maintain. In addition, a variety of optional parts are available to provide an even more desirable air conditioning experience to users.

- V-058 VRF Indoor Unit Lineup for J-VS
- V-060 Compact Cassette Grid type
- V-062 Low Static Pressure Duct Slim Duct
- V-064 Wall-mounted type

- V-066 VRF Indoor Unit Lineup for J-IVS, J-IV, J-IVL, VR-IV, V-IV
- V-068 Compact Cassette Grid type
- V-070 Cassette Slim type Circular Flow
- V-072 Cassette Large type Circular Flow
- V-074 Cassette One-way Flow type
- V-076 3D Flow Cassette
- V-078 Low Static Pressure Duct Mini Duct
- V-080 Low Static Pressure Duct Slim Duct/Slim Concealed Floor
- V-082 Low Static Pressure Duct
- V-084 Medium Static Pressure Duct
- V-086 High Static Pressure Duct
- V-088 Compact Floor
- V-090 Floor/Ceiling
- V-092 Ceiling
- V-094 Wall-mounted (EEV Internal/external)



VRF Indoor Unit Lineup for J-VS

Capacity range (kW)				1.1	1.7
Class				4	5
Cassette	Compact type	Compact Grid type/Standard type		AUXB004HLAH	AUXB005HLAH
		High Efficiency* ¹			
Duct	Low Static Pressure Duct	Slim Duct (With drain pump)	   004 - 014 018 024	ARXD004HLAH	ARXD005HLAH
		High Efficiency* ¹	 009 - 014		
Wall-mounted type		Wall-mounted type	 004 - 014	ASYA004HCAH	ASYA005HCAH
		Wall-mounted type (EEV external)	 004 - 014	ASYE004HCAH	ASYE005HCAH
		This model requires the EV Kit to be connected.			

	2.2 7	2.8 9	3.6 12	4.0 14	4.5 14	5.6 18	7.1 24
AUXB007HLAH	AUXB009HLAH	AUXB012HLAH		AUXB014HLAH	AUXB018HLAH		
	AUXN009HLAH	AUXN012HLAH		AUXN014HLAH			
ARXD007HLAH	ARXD009HLAH	ARXD012HLAH		ARXD014HLAH	ARXD018HLAH	ARXD024HLAH	
	ARXP009HLAH	ARXP012HLAH		ARXP014HLAH			
ASYA007HCAH	ASYA009HCAH	ASYA012HCAH	ASYA014HCAH				
ASYE007HCAH	ASYE009HCAH	ASYE012HCAH	ASYE014HCAH				
This model requires the EV Kit to be connected.							

*1: Production by order
 Specifications and design are subject to change without notice.
 *Products other than ducts can be connected to J-IV, J-IVS, J-IVL, V-IV, VR-IV


Compact Cassette

Grid type



Compact and stylish panel

The compact and stylish panel fits nicely into a grid type ceiling. The linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.

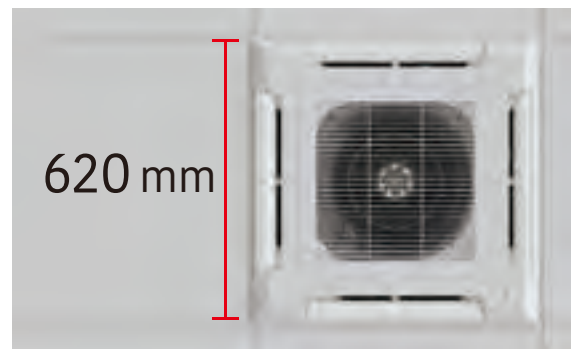


Easy maintenance

You can access the unit for maintenance just by removing a ceiling panel right next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.



The air inlet grille can be installed to open in any direction for easy maintenance.



Flexible installation

The unit fits nicely into the decor of a grid type ceiling and can be installed near a lighting or a ventilation opening.



High ceiling mode

The cassette can be installed up to a height of 3.0 m. (012/014/018).

Model code	Maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
004	2.7	—
005	2.7	—
007	2.7	—
009	2.7	—
012	2.7	3.0
014	2.7	3.0
018	2.7	3.0

Model: AUXB004HLAH / AUXB005HLAH / AUXB007HLAH / AUXB009HLAH

AUXB012HLAH / AUXB014HLAH / AUXB018HLAH

AUXN009HLAH / AUXN012HLAH / AUXN014HLAH * Production by order



Specifications

Model name			AUXB004HLAH	AUXB005HLAH	AUXB007HLAH	AUXB009HLAH	AUXB012HLAH	AUXB014HLAH	AUXB018HLAH	AUXN009HLAH	AUXN012HLAH	AUXN014HLAH
Power source			Single phase, 220-240V, 50Hz							Single phase, 220-240V, 50Hz		
Capacity	Cooling	kW	1.1	1.7	2.2	2.8	3.6	4.5	5.6	2.8	3.6	4.5
	Heating		1.3	1.9	2.8	3.2	4.1	5.0	6.3	3.2	4.1	5.0
Input power		W	21	21	23	24	27	33	50	41	71	81
Airflow rate (Cooling / Heating)*	High	m³/h	530	530	540	550	600	680	820	750	970	1,030
	Med-High		490 / 480	490 / 480	500	520	560	620	660	550	600	680
	Med		450 / 430	450 / 430	460	480	520	560	590	480	520	560
	Med-Low		420 / 380	420 / 380	420	440	480	500	520	440	480	500
	Low		390 / 340	390 / 340	390	400	430	440	460	400	430	440
	Quiet		350 / 300	350 / 300	350	350	390	390	400	350	390	390
Sound pressure level (Cooling / Heating)*	High	dB(A)	34	34	34	35	37	39	45	42	49	50
	Med-High		32 / 31	32 / 31	32	33	34	37	39	35	37	39
	Med		30 / 29	30 / 29	30	31	33	34	36	31	33	34
	Med-Low		28 / 26	28 / 26	28	29	31	32	33	29	31	32
	Low		27 / 24	27 / 24	27	27	29	30	30	27	29	30
	Quiet		25 / 21	25 / 21	25	25	27	27	27	25	27	27
Net Dimensions (H × W × D)		mm	245 × 570 × 570							245 × 570 × 570		
Weight		kg	14.5	14.5	15	15	15.5	15.5	17	15	15.5	15.5
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35
	Gas (Flare)		9.52	9.52	9.52	9.52	12.70	12.70	12.70	9.52	12.70	12.70
Drain Hose Diameter (I.D./O.D.)				25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32
Cassette Grille	Model name		UTG-UFYH-W							UTG-UFYH-W		
	Net Dimensions (H × W × D)		49 × 620 × 620							49 × 620 × 620		
	Weight		kg	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]


*The value is the same for cooling and heating if there is one value.

Optional parts

*For more details, please refer to the chapter "Optional parts".


Wireless remote controller: UTY-LNVY
 Fresh Air Intake Kit: UTZ-VXAA
 Insulation kit for high humidity: UTZ-KXGC
 Silver Ion Filter: UTD-HFAA
 Remote Sensor Kit: UTY-XSZXZ1
 Cassette Grille: UTG-UFYH-W

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3,
 FG-AC-WIF1Z1
 Gas Sensor Kit: UTY-SGZY
 Expansion Kit: UTZ-JXXA
 Air Outlet Shutter Plate: UTR-YDZB

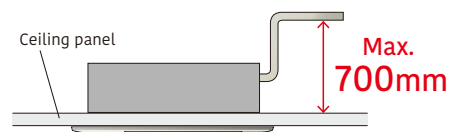

Dimensions

(Unit: mm)

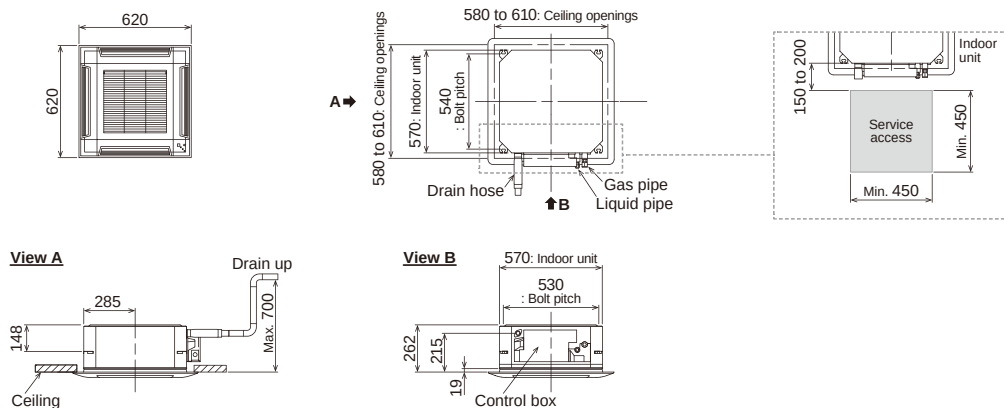


Low Static Pressure Duct Slim Duct




Slim design

Slim design allows for installation in a tight ceiling space.

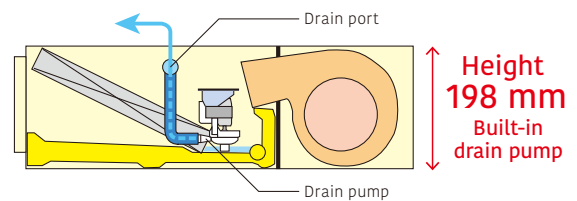

Air intake

Air intake direction can be selected to match the installation site.

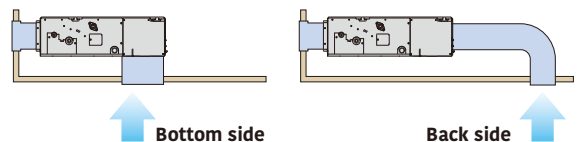

Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa.
The static pressure range can be changed by a remote controller.



Static pressure range
0 to 90 Pa

* 024 model static pressure range is 0 to 50 Pa.


Auto Louver Grille Kit (Option)

The optional clean-looking flat Auto louver blends into any interior and provides a comfortable airflow.




Filter (Accessory)

ARXD004-018



ARXD024



**Model: ARXD004HLAH / ARXD005HLAH / ARXD007HLAH / ARXD009HLAH
ARXD012HLAH / ARXD014HLAH / ARXD018HLAH / ARXD024HLAH
ARXP009HLAH / ARXP012HLAH / ARXP014HLAH * Production by order**



ARXD004/005/007/009/012/014HLAH
ARXP009/012/014HLAH



ARXK018HLAH



ARXK024HLAH

Specifications

Model name			ARXD004HLAH	ARXD005HLAH	ARXD007HLAH	ARXD009HLAH	ARXD012HLAH	ARXD014HLAH	ARXD018HLAH	ARXD024HLAH	ARXP009HLAH	ARXP012HLAH	ARXP014HLAH
Power source			Single phase, 220-240V, 50Hz								Single phase, 220-240V, 50Hz		
Capacity	Cooling	kW	1.1	1.7	2.2	2.8	3.6	4.5	5.6	7.1	2.8	3.6	4.5
	Heating		1.3	1.9	2.8	3.2	4.0	5.0	6.3	8.0	3.2	4.0	5.0
Input power		W	38	38	41	47	48	84	76	107	77	128	128
Airflow rate	High	m³/h	530	530	550	600	580	790	930	1,250	770	940	940
	Med-High		480	480	520	550	550	720	880	1,180	630	810	810
	Med		440	440	480	500	520	640	780	1,060	530	660	660
	Med-Low		410	410	450	460	480	560	670	930	480	580	580
	Low		370	370	400	400	430	470	580	810	430	490	490
	Quiet		320	320	360	360	350	370	510	640	380	390	390
Static pressure range		Pa	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 50	0 to 25	0 to 25	0 to 25
Standard static pressure			25	25	25	25	25	25	25	25	25	25	25
Sound pressure level	High	dB(A)	26	26	28	29	30	34	34	35	36	40	40
	Med-High		26	26	26	27	28	32	31	32	32	38	38
	Med		25	25	25	25	27	30	29	30	28	33	33
	Med-Low		24	24	24	24	26	28	27	27	27	31	31
	Low		22	22	22	22	24	25	25	24	25	27	27
	Quiet		21	21	21	21	22	22	23	21	23	24	24
Net Dimensions (H × W × D)		mm	198 × 700 × 620						198 × 900 × 620	198 × 1,100 × 620	198 × 700 × 620		
Weight		kg	16	16	16.5	16.5	17	17	21	25	16.5	17	17
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	9.52	6.35	6.35	6.35
	Gas (Flare)		9.52	9.52	9.52	9.52	12.70	12.70	12.70	15.88	9.52	12.70	12.70
Drain Hose Diameter (I.D./O.D.)			25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32	25 / 32


Note: Specifications are subject to the following conditions:
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]
*1: This value is under cooling operation.

Optional parts

*For more details, please refer to the chapter "Optional parts".


Wireless remote controller: UTY-LNVY*	Auto Louver Grille Kit: UTD-GXTA-W (004-014)
Remote sensor unit: UTY-XSXXZ1	UTD-GXTB-W (018)
IR receiver unit: UTY-TRHX	UTD-GXTC-W (024)
WLAN adapter: UTY-TFSXJ3	Silver Ion Filter: UTD-HFTA (004-014)
UTY-TFSXZ1	UTD-HFTB (018)
FG-AC-WIFI21	UTD-HFTC (024)
Expansion Kit: UTZ-JXXA	Gas Sensor Kit: UTY-SGZY

*IR receiver unit (UTY-TRHX) is required.

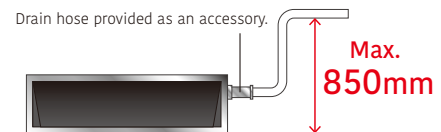


Dimensions

(Unit: mm)

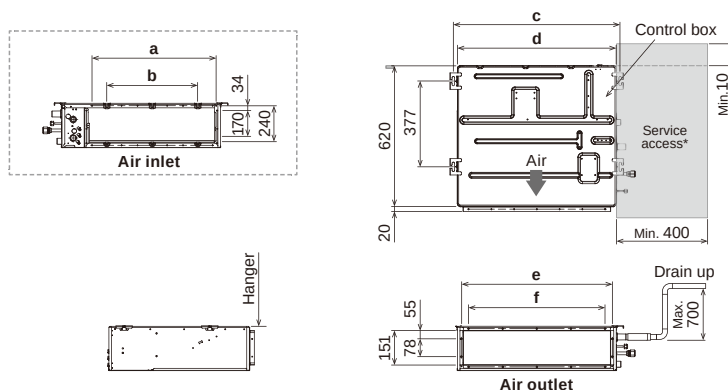

	ARXD004HLAH	ARXD018HLAH	ARXD024HLAH
a	574	774	974
b	P200×2=400	P200×3=600	P200×4=800
c	734	934	1,134
d	700	900	1,100
e	650	850	1,050
f	P100×6=600	P100×8=800	P100×10=1,000

*The design of the service access depends on the installation method. Refer to the installation manual for more information.



Wall-mounted type



Highly-efficiency, compact design

The 004-014 models share the same design. The high-density and large heat exchanger achieves a highly-efficiency and compact design. The compact body blends in well with conference rooms and offices, providing comfortable air conditioning.

High-density heat exchanger



Slim tube design: 5 mm

Greater heat-exchanging capacity is achieved through the use of a high-density heat exchanger and a sub-heat exchanger.



More comfortable airflow

The unique power diffuser provides comfortable air conditioning.

Heating

The vertical air flow provides powerful floor-level heating.



Power diffuser



Cooling

The left/right airflow avoids blowing cool air directly at the occupants in a room.






Power diffuser



Quiet operation & 6-Step fan speed control

The airflow pattern achieves significant noise reduction. Multistep airflow adjustment to suit the environment

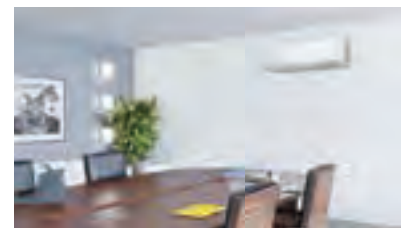


* Remote controller is compatible with the following:
UTY-RVRY / UTY-LNVY / UTY-RNRYZ5 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGYZ2 / UTY-ALGXZ1 / UTY-APGXZ1

The Occupancy sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

* If you want to use the Occupancy sensor control* function, you need an setting device that can set the Occupancy sensor control* function. For example: Wired RC (Touch panel).

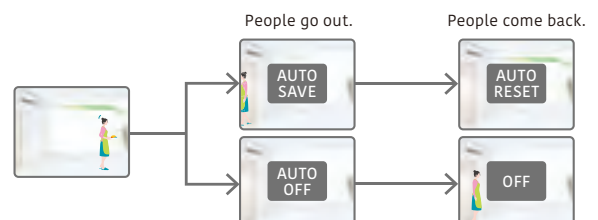

**Model: ASYA004HCAH / ASYA005HCAH / ASYA007HCAH
 ASYA009HCAH / ASYA012HCAH / ASYA014HCAH**
[external EEV]
**ASYE004HCAH / ASYE005HCAH / ASYE007HCAH
 ASYE009HCAH / ASYE012HCAH / ASYE014HCAH**



Specifications

Model name			ASYA004HCAH	ASYA005HCAH	ASYA007HCAH	ASYA009HCAH	ASYA012HCAH	ASYA014HCAH	ASYE004HCAH	ASYE005HCAH	ASYE007HCAH	ASYE009HCAH	ASYE012HCAH	ASYE014HCAH	
Power source			Single phase, 220-240V, 50Hz						Single phase, 220-240V, 50Hz						
Capacity	Cooling	kW	1.1	1.7	2.2	2.8	3.6	4.0	1.1	1.7	2.2	2.8	3.6	4.0	
	Heating		1.3	1.9	2.8	3.2	4.0	4.5	1.3	1.9	2.8	3.2	4.0	4.5	
Input power			W	12	12	16	19	25	35	12	12	16	19	25	35
Airflow rate	High	m³/h	450	450	550	590	660	770	450	450	550	590	660	770	
	Med-High		430	430	490	550	590	710	430	430	490	550	590	710	
	Med		400	400	450	490	550	650	400	400	450	490	550	650	
	Med-Low		380	380	390	420	510	590	380	380	390	420	510	590	
	Low		360	360	360	360	450	530	360	360	360	360	450	530	
	Quiet		310	310	320	320	320	320	310	310	320	320	320	320	
Sound pressure level	High	dB(A)	31	31	34	37	40	44	31	31	34	37	40	44	
	Med-High		30	30	32	34	37	42	30	30	32	34	37	42	
	Med		28	28	30	32	34	40	28	28	30	32	34	40	
	Med-Low		27	27	28	29	33	37	27	27	28	29	33	37	
	Low		26	26	26	26	30	34	26	26	26	26	30	34	
	Quiet		22	22	22	22	22	22	22	22	22	22	22	22	
Net Dimensions (H × W × D)		mm	268 × 840 × 203						268 × 840 × 203						
Weight		kg	8	8	8.5	8.5	8.5	8.5	8	8	8.5	8.5	8.5	8.5	
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	
	Gas (Flare)		9.52	9.52	9.52	9.52	12.70	12.70	9.52	9.52	9.52	9.52	12.70	12.70	
Drain Hose Diameter (I.D./O.D.)			mm	13.8/15.8 to16.7						13.8/15.8 to16.7					
EV Kit (optional)				—	—	—	—	—		UTR-EV09XC				UTR-EV14XC	

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

When connecting ASY*004G**H, ASY*007G**H, ASY*009G**H to an outdoor unit other than the outdoor unit of the J-IVL series, the gas pipe diameter should be Ø12.70 mm.

Optional parts

*For more details, please refer to the chapter "Optional parts".


Wireless remote controller: UTY-LNVY
 Silver Ion Filter: UTR-FA16-5

Expansion Kit: UTZ-JXXA
 Remote Sensor Kit: UTY-XS2XZ1

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
 Gas Sensor Kit: UTY-SGZY

Dimensions

(Unit: mm)

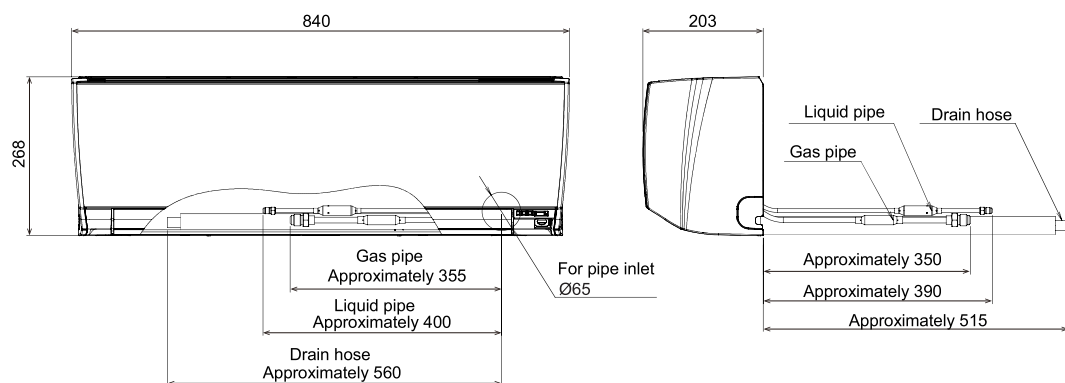

VRF Indoor Unit Lineup for J-IVS J-IV J-IVL VR-IV V-IV

Capacity range (kW)				1.1	2.2	2.8	3.6
Class				4	7	9	12
Cassette	Compact type	Compact Grid type/Standard type		AUXB 004 GLEH	AUXB 007 GLEH	AUXB 009 GLEH	AUXB 012 GLEH
	Slim type	Circular Flow					
	Large type	Circular Flow					
	One-way Flow type	One-way Flow	 004 - 012  014 - 024	AUXV 004 GLEH	AUXV 007 GLEH	AUXV 009 GLEH	AUXV 012 GLEH
	3D Flow type	3D Flow					
Duct	Low Static Pressure Duct	Mini Duct (With drain pump)	 004 - 014  018  024	ARXK 004 GLGH	ARXK 007 GLGH	ARXK 009 GLGH	ARXK 012 GLGH
		Slim Duct (With drain pump)	 04/007 - 014  018  024	ARXD 04 GALH*2	ARXD 007 GLEH	ARXD 009 GLEH	ARXD 012 GLEH
		High Efficiency*3					
	Medium static pressure duct	Normal					
	High Static Pressure Duct	Normal	 036/45 - 60  072 - 090  096				
Floor		Floor (*Same as Ceiling models)					ABYA 012 GTEH
		Slim Concealed Floor (*Same as Slim Duct models)	 04/007 - 014  018  024	ARXD 04 GALH*2	ARXD 007 GLEH	ARXD 009 GLEH	ARXD 012 GLEH
		Compact Floor		AGYA 004 GCGH	AGYA 007 GCGH	AGYA 009 GCGH	AGYA 012 GCGH
		Compact Floor (EEV external)		AGYE 004 GCEH	AGYE 007 GCEH	AGYE 009 GCEH	AGYE 012 GCEH
				This model requires the EV Kit to be connected.			
Ceiling			 012 - 024  030 - 054				ABYA 012 GTEH
Wall-mounted type	Wall-mounted type	 004 - 014  18 - 24  030 - 034	ASYA 004 GCGH	ASYA 007 GCGH	ASYA 009 GCGH	ASYA 012 GCGH	
	Wall-mounted type (EEV external)	 004 - 014	ASYE 004 GCEH	ASYE 007 GCEH	ASYE 009 GCEH	ASYE 012 GCEH	
				This model requires the EV Kit to be connected.			

	4.0	4.5	5.6	7.1	9.0	10.0	11.2	12.5	14.0	18.0	22.4	25.0	28.0
	14	14	18	24	30	34	36	45	54	60	72	90	96
		AUXB 014 GLEH	AUXB 018 GLEH	AUXB 024 GLEH									
			AUXM 018 GLEH	AUXM 024 GLEH	AUXM 030 GLEH								
			AUXK 018 GLEH	AUXK 024 GLEH	AUXK 030 GLEH	AUXK 034 GLEH	AUXK 036 GLEH	AUXK 045 GLEH	AUXK 054 GLEH				
		AUXV 014 GLEH	AUXV 018 GLEH	AUXV 024 GLEH									
			AUXS 018 GLEH	AUXS 024 GLEH									
		ARXK 014 GLGH	ARXK 018 GLGH	ARXK 024 GLGH									
		ARXD 014 GLEH	ARXD 018 GLEH	ARXD 024 GLEH									
			ARXP 018 GLFH		ARXP 030 GLFH								
				ARXA 024 GLEH	ARXA 030 GLEH		ARXA 036 GLEH	ARXA 045 GLEH					
							ARXC 036 GTEH	ARXC 045 GTEH		ARXC 060 GTEH*1	ARXC 072 GTEH*1	ARXC 090 GTEH*1	ARXC 096 GTEH*1
		ABYA 014 GTEH	ABYA 018 GTEH	ABYA 024 GTEH									
		ARXD 014 GLEH	ARXD 018 GLEH	ARXD 024 GLEH									
AGYA 014 GCGH													
AGYE 014 GCEH													
		ABYA 014 GTEH	ABYA 018 GTEH	ABYA 024 GTEH	ABYA 030 GTEH		ABYA 036 GTEH	ABYA 045 GTEH	ABYA 054 GTEH				
ASYA 014 GCGH			ASYA 018 GBCH	ASYA 024 GBCH	ASYA 030 GTEH	ASYA 034 GTEH							
ASYE 014 GCEH													

*1: ARXC060/072/090/096G cannot be connected to J-IVS/J-IV series.

*2: ARXD04GALH cannot be connected to J-IVS/J-IV/J-IVL/VIR-IV series.

*3: Production by order

Specifications and design are subject to change without notice.


Compact Cassette

Grid type



Compact and stylish panel

The compact and stylish panel fits nicely into a grid type ceiling. The linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.

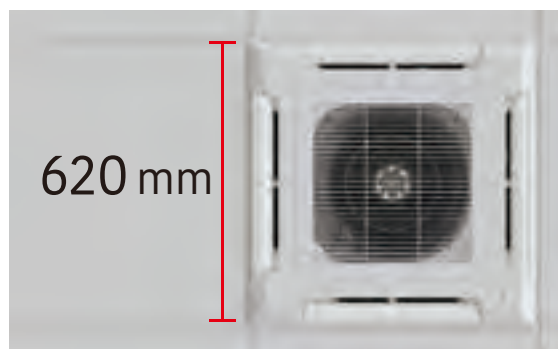


Easy maintenance

You can access the unit for maintenance just by removing a ceiling panel right next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.



The air inlet grille can be installed to open in any direction for easy maintenance.

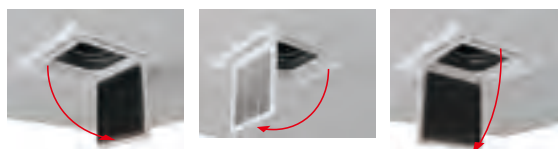

Flexible installation

The unit fits nicely into the decor of a grid type ceiling and can be installed near a lighting or a ventilation opening.



High ceiling mode

The cassette can be installed up to a height of 3.0 m. (012/014/018/024).

Model code	Maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
004	2.7	—
007	2.7	—
009	2.7	—
012	2.7	3.0
014	2.7	3.0
018	2.7	3.0
024	2.7	3.0

**Model: AUXB004GLEH / AUXB007GLEH / AUXB009GLEH
AUXB012GLEH / AUXB014GLEH / AUXB018GLEH
AUXB024GLEH**



Specifications


Model name			AUXB004GLEH	AUXB007GLEH	AUXB009GLEH	AUXB012GLEH	AUXB014GLEH	AUXB018GLEH	AUXB024GLEH
Power source			Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.5	5.6	7.1
	Heating		1.3	2.8	3.2	4.1	5.0	6.3	8.0
Input power		W	23	25	25	29	35	36	84
Airflow rate	High	m³/h	530/530	540	550	600	680	710	1,030
	Med-High		490/480	500	520	560	620	660	910
	Med		450/430	460	480	520	560	590	790
	Med-Low		420/380	420	440	480	500	520	680
	Low		390/340	390	400	430	440	460	560
	Quiet		350/300	350	350	390	390	400	450
Sound pressure level	High	dB(A)	34/34	34	35	37	38	41	50
	Med-High		32/31	32	33	34	37	39	46
	Med		30/29	30	31	33	34	36	43
	Med-Low		28/26	28	29	31	32	33	39
	Low		27/24	27	27	29	30	30	35
	Quiet		25/21	25	25	27	27	27	30
Net Dimensions (H × W × D)		mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight		kg	14.5	15	15	15	15	17	17
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)		9.52	9.52	9.52	12.70	12.70	12.70	15.88
Drain Hose Diameter (I.D./O.D.)			25/32						
Cassette Grille	Model name		UTG-UFYE-W/UTG-UFYC-W						
	Net Dimensions (H × W × D)		mm	49 × 620 × 620/50 × 700 × 700					
	Weight		kg	2.3/2.6					

Note: Specifications are subject to the following conditions:
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]
*1: This value is under cooling operation.

Optional parts


*For more details, please refer to the chapter "Optional parts".

Air Outlet Shutter Plate:	UTR-YDZB	Cassette Grille:	UTG-UFYE-W, UTG-UFYE-W
Fresh Air Intake Kit:	UTZ-VXAA	External power supply unit:	UTZ-GXXA, UTZ-GXXC*
Insulation Kit for high humidity:	UTZ-KXGC	WLAN adapter:	UTY-TFSXZ1, UTY-TFSXJ3,
Silver Ion Filter:	UTD-HFAA		FG-AC-WIF1Z1
Remote Sensor Kit:	UTY-XSZXZ1		

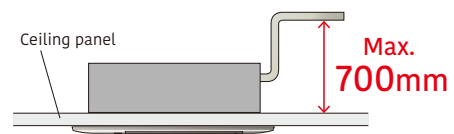

Dimensions

(Unit: mm)

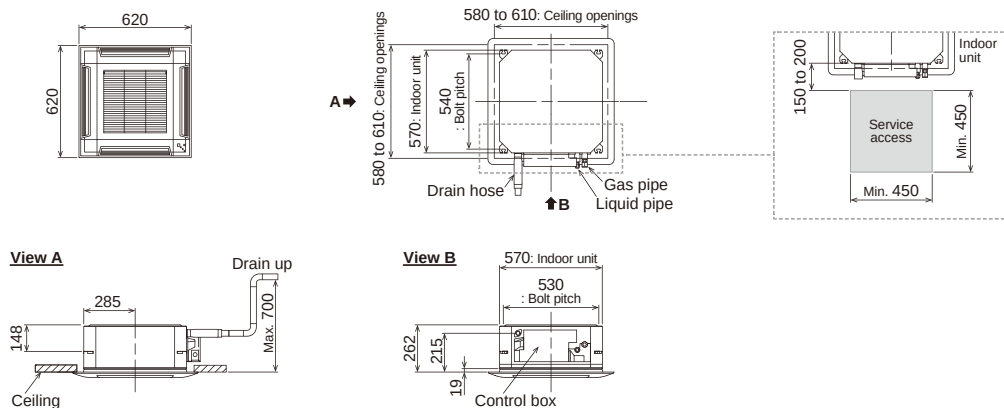

Cassette Slim type

Circular Flow



Unique circular flow design


This Cassette type air conditioner is equipped with a high performance DC fan motor, a turbo fan, and a louver to propel powerful airflows in all directions.

Ø7 mm high-density heat exchanger

New DC fan motor

High-efficiency turbo fan

Seamless airflow louver

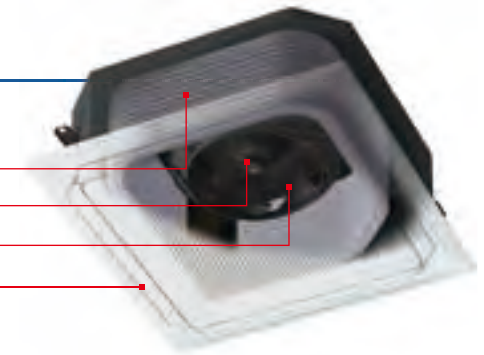

Uniform temperature air conditioning


Achieve a comfortable air conditioning spread to every corner of the room thanks to the circular flow and wide vertical airflow.




Individual louver control

Each louver can be set individually by the Touch panel wired remote controller so the user can enjoy the comfort of different directional airflows according to the room layout.

* UTY-RNRYZ5 Wired remote controller with touch panel and
UTY-DCGYZ3 Central remote controller only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.



Provides efficient air conditioning based on the room layout

The Human sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

* UTY-RNRYZ5 Wired remote controller with touch panel and
UTY-DCGYZ3 Central remote controller only



Human sensor
(Optional)

2 modes are available to choose from:


Auto economy mode

The air conditioner switches to operate on reduced power when it detects that the room is unoccupied.

Auto-off mode

The air conditioner stops operating when it detects that the room is unoccupied.

Model: AUXM018GLEH / AUXM024GLEH / AUXM030GLEH

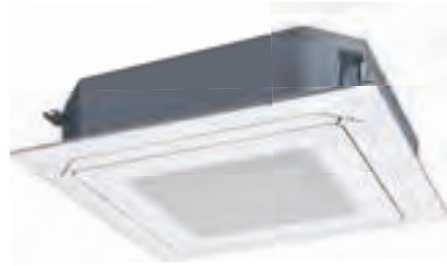

Specifications

Model name			AUXM018GLEH	AUXM024GLEH	AUXM030GLEH
Power source			Single phase, ~230 V, 50 Hz		
Capacity	Cooling	kW	5.6	7.1	9.0
	Heating		6.3	8.0	10.0
Input power		W	20	25	49
Airflow rate	High	m³/h	1,050	1,120	1,470
	Med-High		930	1,050	1,160
	Med		900	930	1,070
	Med-Low		870	900	930
	Low		810	870	900
	Quiet		780	780	780
Sound pressure level	High	dB(A)	33	35	40
	Med-High		32	33	36
	Med		31	32	34
	Med-Low		30	31	32
	Low		29	30	31
	Quiet		28	28	28
Dimensions (H × W × D)		mm	246 × 840 × 840		
Weight		kg	24.0	24.5	24.5
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	9.52
	Gas (Flare)		12.70	15.88	15.88
Drain Hose Diameter (I.D./O.D.)			25/32		
Cassette Grille	Model name		UTG-UKYC-W/UTG-UKYA-B		
	Dimensions (H × W × D)	mm	53 × 950 × 950		
	Weight	kg	6.0		

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

When AUX*018GLEH is connected to an outdoor unit other than one of the J-IVL series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

When connecting AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH to an outdoor unit other than the outdoor unit of the J-IVL series, the gas pipe diameter should be Ø19.05 mm.

Optional parts

*For more details, please refer to the chapter "Optional parts".

Human Sensor Kit: UTY-SHZXC

Wide Panel: UTG-AKXA-W

Panel Spacer: UTG-BKXA-W

Fresh Air Intake Kit:UTZ-VXRA

Air Outlet Shutter Plate: UTR-YDZK

Insulation Kit for high humidity: UTZ-KXRA

Cassette Grille: UTG-UKYC-W, UTG-UKYA-B

External power supply unit: UTZ-GXXA, UTZ-GXXC*

IR Receiver Unit: UTY-LBHXD


WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3,FG-AC-WIF1Z1

Silver Ion Filter: UTD-HFRA

Remote Sensor Kit: UTY-XSZXZ1

Dimensions

(Unit: mm)

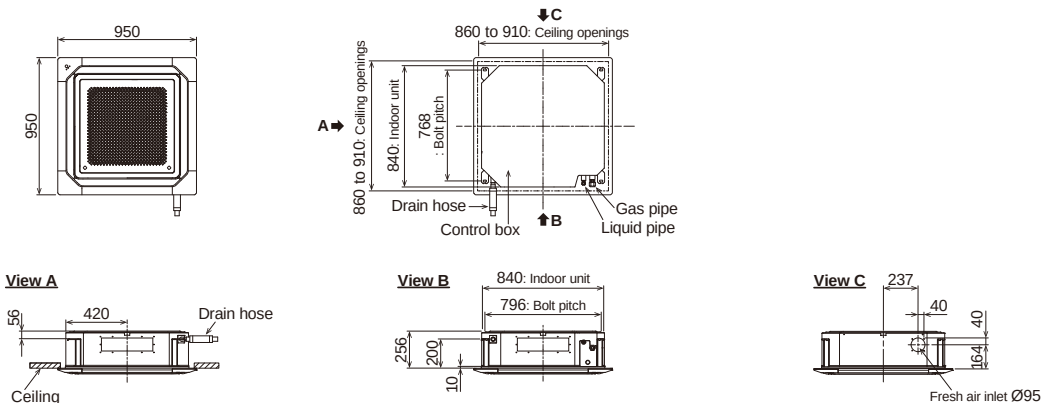

Cassette Large type Circular Flow



Unique circular flow design


This Cassette type air conditioner is equipped with a high performance DC fan motor, a turbo fan, and a louver to propel powerful airflows in all directions.

Ø7 mm high-density heat exchanger

New DC fan motor

High-efficiency turbo fan

Seamless airflow louver

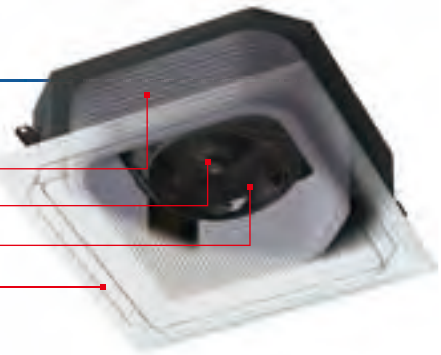

Uniform temperature air conditioning


Achieve a comfortable air conditioning spread to every corner of the room thanks to the circular flow and wide vertical airflow.




Individual louver control

Each louver can be set individually by the Touch panel wired remote controller so the user can enjoy the comfort of different directional airflows according to the room layout.

* UTY-RNRYZ5 Wired remote controller with touch panel and
UTY-DCGYZ3 Central remote controller only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.



Provides efficient air conditioning based on the room layout

The Human sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

* UTY-RNRYZ5 Wired remote controller with touch panel and
UTY-DCGYZ3 Central remote controller only



Human sensor
(Optional)

2 modes are available to choose from:


Auto economy mode

The air conditioner switches to operate on reduced power when it detects that the room is unoccupied.

Auto-off mode

The air conditioner stops operating when it detects that the room is unoccupied.

**Model: AUXK018GLEH / AUXK024GLEH / AUXK030GLEH
AUXK034GLEH / AUXK036GLEH / AUXK045GLEH
AUXK054GLEH**

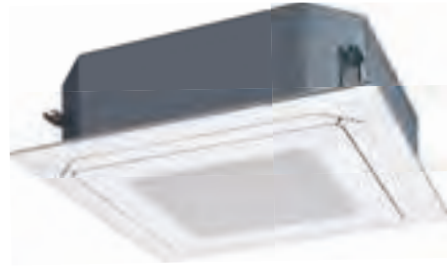

Specifications

Model name			AUXK018GLEH	AUXK024GLEH	AUXK030GLEH	AUXK034GLEH	AUXK036GLEH	AUXK045GLEH	AUXK054GLEH
Power source			Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	5.6	7.1	9.0	10.0	11.2	12.5	14.0
	Heating		6.3	8.0	10.0	11.2	12.5	14.0	16.0
Input power		W	40	40	47	47	61	89	116
Airflow rate	High	m³/h	1,420	1,420	1,440	1,440	1,620	1,820	2,040
	Med-High		1,360	1,360	1,400	1,400	1,500	1,590	1,800
	Med		1,300	1,300	1,340	1,340	1,400	1,500	1,590
	Med-Low		1,270	1,270	1,300	1,300	1,340	1,400	1,440
	Low		1,200	1,200	1,280	1,280	1,280	1,300	1,300
	Quiet		1,150	1,150	1,150	1,150	1,150	1,150	1,150
Sound pressure level	High	dB(A)	38	38	39	39	41	44	47
	Med-High		37	37	38	38	40	42	45
	Med		36	36	37	37	38	40	42
	Med-Low		35	35	36	36	37	38	39
	Low		34	34	35	35	36	36	36
	Quiet		33	33	33	33	33	33	33
Dimensions (H × W × D)		mm	288 × 840 × 840						
Weight		kg	26.5	26.5	29.5	29.5	29.5	29.5	29.5
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	9.52	9.52	9.52	9.52	9.52
	Gas (Flare)		12.70	15.88	15.88	15.88	15.88	15.88	15.88
Drain Hose Diameter (I.D./O.D.)			25/32						
Cassette Grille	Model name		UTG-UKYC-W/UTG-UKYA-B						
	Dimensions (H × W × D)		53 × 950 × 950						
	Weight		6.0						

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

When AUX*018GLEH is connected to an outdoor unit other than one of the J-IVL series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

When connecting AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH to an outdoor unit other than the outdoor unit of the J-IVL series, the gas pipe diameter should be Ø19.05 mm.

Optional parts

*For more details, please refer to the chapter "Optional parts".

Human Sensor Kit: UTY-SHZXC

Wide Panel: UTG-AKXA-W

Panel Spacer: UTG-BKXA-W

Fresh Air Intake Kit:UTZ-VXRA

Air Outlet Shutter Plate: UTR-YDZK

Insulation Kit for high humidity: UTZ-KXRA

Cassette Grille: UTG-UKYC-W, UTG-UKYA-B

External power supply unit: UTZ-GXXA, UTZ-GXXC*

IR Receiver Unit: UTY-LBHXD


WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3,FG-AC-WIF1Z1

Silver Ion Filter: UTD-HFRA

Remote Sensor Kit: UTY-XSZXZ1

Dimensions

(Unit: mm)

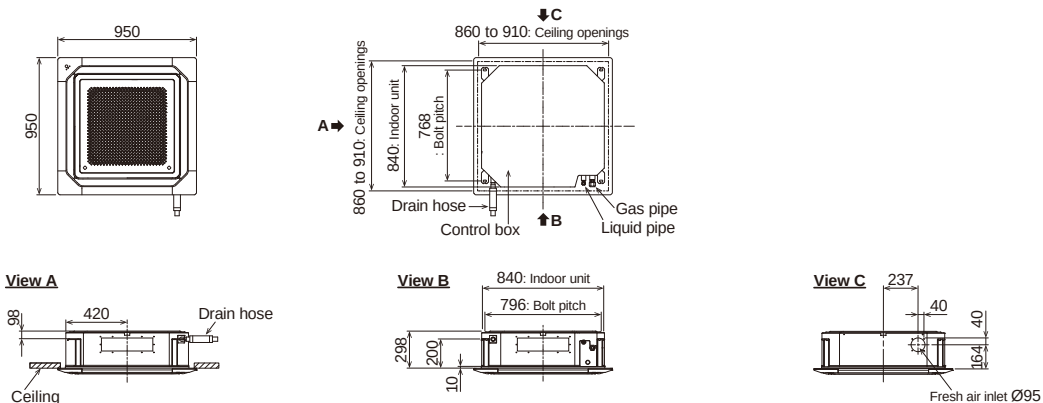

Cassette

One-way Flow type



Compact chassis size


The compact size allows easy installation in a variety of commercial facilities and environments.

- The height of the chassis is less than 200 mm for all models.
- All 4 to 12 kBTu models are less than 1,000 mm wide.
- The depth of the chassis is 570 mm, which fits nicely into a grid type ceiling.

Dimensions (Panel size)

(Unit: mm)

	4	7	9	12	14	18	24
H		198 (43)				198 (43)	
W		785 (950)				1,190 (1,360)	
D		570 (620)				570 (620)	

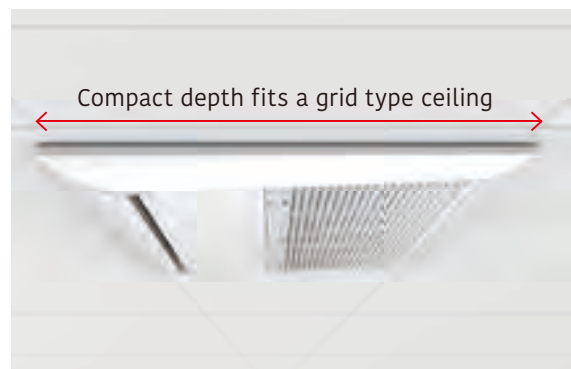


Wide airflow range


A large flap with a wide range of movements, equipped with louvers arranged triangularly, sends air into every corner of the room.



In cooling mode, the left/right airflow reaches every corner of the room without directly touching the human body to provide comfortable air conditioning.

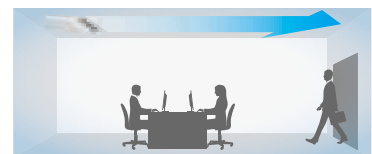

In heating mode, warm air is directed downward toward the floor to warm the feet and lower body, while the head is kept relatively cool.

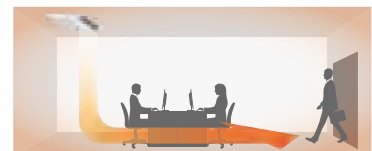

Note: This is a conceptual drawing. The performance of an air conditioner may vary depending on where it is installed, the size of the room, and its distance from the wall.

Quiet mode

The low operating noise makes the model ideal for use in hotel rooms.



**Model: AUXV004GLEH / AUXV007GLEH / AUXV009GLEH
AUXV012GLEH / AUXV014GLEH / AUXV018GLEH
AUXV024GLEH**



AUXV004/007/009/012GLEH



AUXV014/018/024GLEH

Specifications

Model name			AUXV004GLEH	AUXV007GLEH	AUXV009GLEH	AUXV012GLEH	AUXV014GLEH	AUXV018GLEH	AUXV024GLEH
Power source			Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.5	5.6	7.1
	Heating		1.3	2.8	3.2	4.0	5.0	6.3	8.0
Input power		W	30/30	42/42	42/42	60/60	38/38	56/56	99/99
Airflow rate*	High	m³/h	460	550	550	670	720	890	1,150
	Med-High		440	440	440	520	660	840	1,020
	Med		420	420	420	480	630	770	940
	Med-Low		400	400	400	450	600	710	790
	Low		380	380	380	410	580	660	700
	Quiet		360	360	360	360	550	580	610
Sound pressure level*	High	dB(A)	38	42	42	45	37	44	49
	Med-High		37	37	37	41	36	43	47
	Med		36	36	36	39	35	40	45
	Med-Low		35	35	35	38	34	38	42
	Low		33	33	33	36	33	36	39
	Quiet		32	32	32	32	32	34	36
Net Dimensions (H × W × D)		mm	198 × 785 × 570	198 × 785 × 570	198 × 785 × 570	198 × 785 × 570	198 × 1,190 × 570	198 × 1,190 × 570	198 × 1,190 × 570
Weight		kg	18	19	19	19	26	26	27
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)		9.52	9.52	9.52	12.70	12.70	12.70	15.88
Drain Hose Diameter (I.D./O.D.)			25/32						
Cassette Grille	Model name		UTG-UNYA-W				UTG-UNYB-W		
	Net Dimensions (H × W × D)		43 × 950 × 620				43 × 1,360 × 620		
	Weight		6.5				8.5		

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]


Optional parts

*For more details, please refer to the chapter "Optional parts".

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
IR Receiver Unit: UTY-TRHX
Cassette Grille: UTG-UNYA-W (004-012),
UTG-UNYB-W (014-024)
External power supply unit: UTZ-GXXA, UTZ-GXXC*
Remote sensor kit: UTY-XSZXZ1


Flexible Installation

The L-shaped pipe kit allows for more flexible installation. Equipped with a built-in drain pump as standard, which enables a maximum pipe height difference of 700 m from the ceiling.



Dimensions

(Unit: mm)

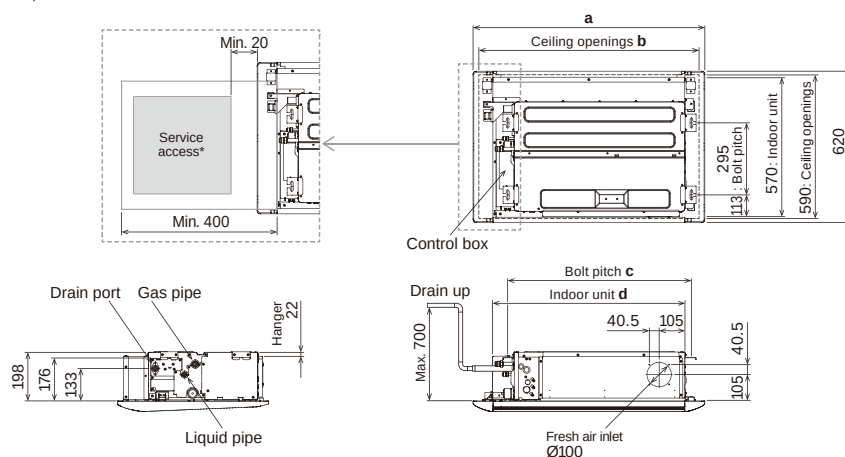

	AUXV 004 / 007 / 009 / 012 GLEH	AUXV 014 / 018 / 024 GLEH
a	950	1,360
b	920	1,330
c	752	1,152
d	785	1,190

*The design of the service access depends on the installation method. Refer to the installation manual for more information.

3D Flow Cassette



3 individually controlled air outlet ports

The Comfortable airflow setting enables the left and right air outlet ports as well as the wide center port to work together to provide a comfortable room environment.


Temperature distribution during cooling and heating (when set to Comfortable airflow)



Testing conditions: Model AUXS024GLEH running cooling operation with the air volume set to "Hi" to maintain the room temperature at 18°C with the outdoor temperature at 35°C, tested in our 40m² environmental test room




Testing conditions: Model AUXS024GLEH running heating operation with the air volume set to "Hi" to maintain the room temperature at 30°C with the outdoor temperature at 7°C, tested in our 40m² environmental test room

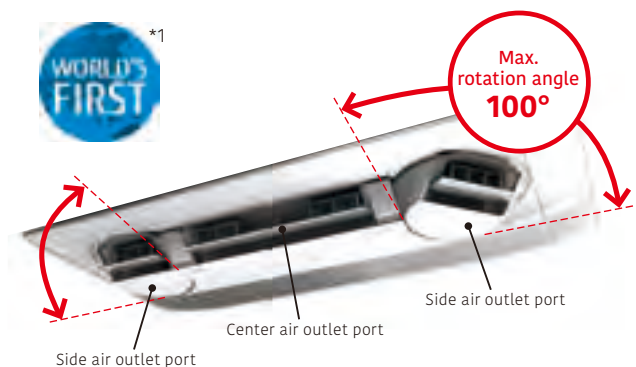

*1: Announced 2018. In the category of room air conditioners for the home (source: Fujitsu General Limited).

Individual airflow setting

The individual airflow setting function optimizes the airflow direction to match the room layout.

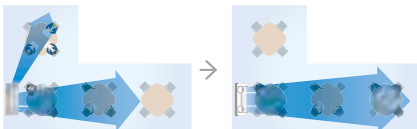

Adjusts airflows from the side air outlet ports to match the layout and usage of the room to minimize the amount of wasted airflow.



The airflow is optimally controlled to provide improved comfort in a narrow room.

Individual control of air outlet ports

Individual airflow can be set using a Wired remote controller with touch panel, Design type and Central remote controller*. The airflow from each air outlet port can be set individually.



Wired remote controller (Design type)

UTY-RVRY



Wired remote controller with Touch Panel

UTY-RNRYZ5



Central remote controller

UTY-DCGYZ3

* Feature available only on UTY-RNRYZ5 Wired remote controller with touch panel and UTY-DCGYZ3 Central remote controller

High energy saving

The structural design to take in a larger volume of air and blow air out more smoothly reduces air blowing loss and achieves class-leading energy-saving performance.



Low power consumption
20 w*

*: 018 model

Model: AUXS018GLEH / AUXS024GLEH



Specifications

Model name			AUXS018GLEH	AUXS024GLEH
Power source			Single phase, ~230 V, 50 Hz	
Capacity	Cooling	kW	5.60	7.10
	Heating		6.30	8.00
Input power		W	20/28	34/43
Airflow rate*	High	m³/h	750/870	950/1,040
	Med-High		710/830	890/990
	Med		690/780	860/930
	Med-Low		660/740	810/880
	Low		630/700	770/840
	Quiet		540/540	540/540
Sound pressure level*	High	dB(A)	38/41	43/46
	Med-High		36/40	42/45
	Med		35/39	41/43
	Med-Low		35/37	40/42
	Low		33/36	38/40
	Quiet		29/29	29/29
Net Dimensions (H × W × D)		mm	200 × 1,240 × 500	200 × 1,240 × 500
Weight		kg	25	25
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52
	Gas (Flare)		12.70	15.88
Drain Hose Diameter (I.D./O.D.)			25/32	
Cassette Grille	Model name		UTG-USYA-W	
	Net Dimensions (H × W × D)	mm	85 × 1,350 × 580	
	Weight	kg	11.5	

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

*: Applicable to cooling and heating operation

Optional parts

*For more details, please refer to the chapter "Optional parts".


WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
IR Receiver Unit: UTY-TRHX

Cassette Grille: UTG-USYA-W
Remote sensor kit: UTY-XSZXZ1

External power supply unit: UTZ-GXXA, UTZ-GXXC*

Dimensions

(Unit: mm)

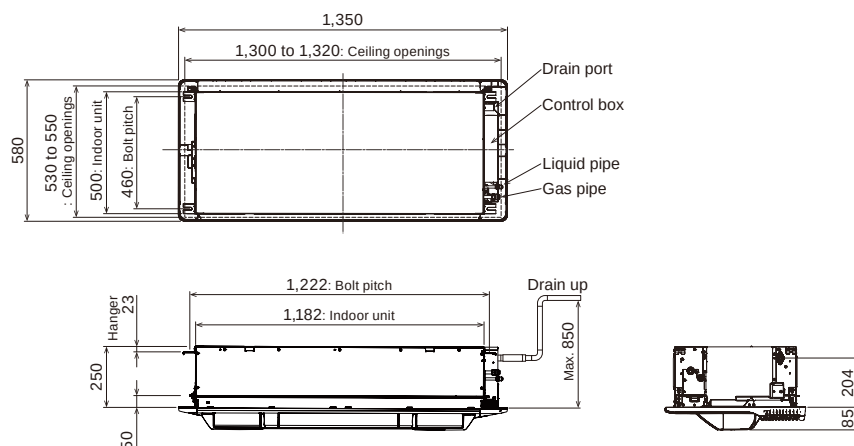


Low Static Pressure Duct Mini Duct (With drain pump)




Space saving design

- Fits into a space 198 mm high and 450 mm deep
- 30% smaller than previous-generation models
- Weighs 16 kg, 10% lighter

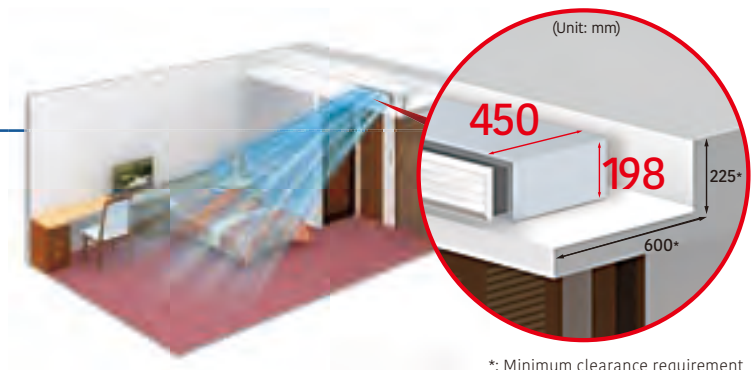


Optimum airflow path and low noise operation

The stabilized airflow reduces the noise level significantly.

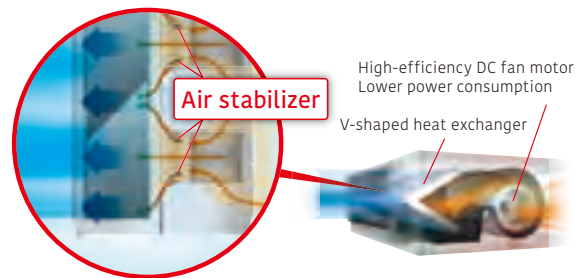


6-speed control*

Multistep airflow adjustment allows installation in a quiet location.




at 04 model

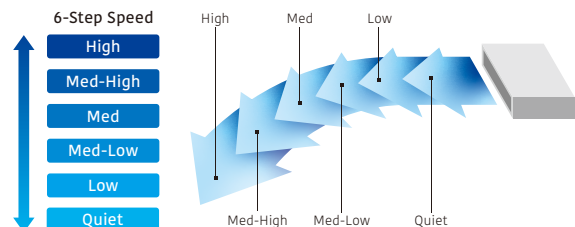

* Remote controller is compatible with the following:
UTY-RVRY / UTY-RNRVZ5 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGVZ2 /
UTY-ALGXZ1 / UTY-APGXZ1

Easy to design and maintain for drain


Indoor unit design for easy maintenance. Parts can be replaced from the side of the unit where maintenance is easier.




A drain pump is built into the unit as standard:

Parts can be accessed and replaced through the side of the unit for easy maintenance.


**Model: ARXK004GLGH / ARXK007GLGH / ARXK009GLGH
ARXK012GLGH / ARXK014GLGH / ARXK018GLGH
ARXK024GLGH**



ARXK004/007/009/012/014GLGH

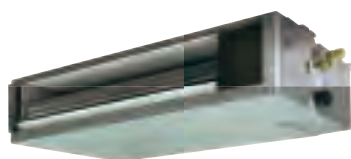

ARXK018GLGH

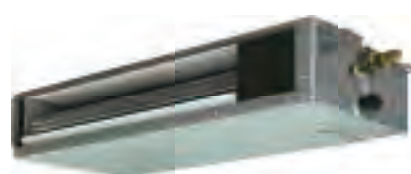

ARXK024GLGH

Specifications

Model name			ARXK004GLGH	ARXK007GLGH	ARXK009GLGH	ARXK012GLGH	ARXK014GLGH	ARXK018GLGH	ARXK024GLGH
Power source			Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.5	5.6	7.1
	Heating		1.3	2.8	3.2	4.0	5.0	6.3	8.0
Input power		W	26	28	28	35	66	73	80
Airflow rate	High	m³/h	460	460	460	550	760	930	1,160
	Med-High		440	440	440	520	660	840	1,060
	Med		420	420	420	480	560	740	960
	Med-Low		400	400	400	450	490	640	860
	Low		370	370	370	410	410	540	750
	Quiet		340	340	340	340	340	470	610
Static pressure range		Pa	0 to 30	0 to 30	0 to 30	0 to 30	0 to 50	0 to 50	0 to 50
Standard static pressure			10	10	10	10	15	15	15
Sound pressure level	High	dB(A)	25	26	26	29	34	33	32
	Med-High		24	25	25	27	31	30	30
	Med		23	24	24	26	28	28	28
	Med-Low		22	23	23	25	26	26	27
	Low		21	22	22	24	24	24	25
	Quiet		20	21	21	22	22	22	22
Net Dimensions (H × W × D)		mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450	198 × 1,100 × 450
Weight		kg	14.5	15.5	15.5	16	16	19	22.5
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)		9.52	9.52	9.52	12.70	12.70	12.70	15.88
Drain Hose Diameter (I.D./O.D.)			25/32						

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

Optional parts

*For more details, please refer to the chapter "Optional parts".

Remote sensor unit: UTY-XSZX21

IR receiver unit: UTY-TRHX

Silver Ion Filter: UTD-HFTA (004-014)

UTD-HFTB (018)

UTD-HFTC (024)

External power supply unit: UTZ-GXXA, UTZ-GXXC*

Auto Louver Grille Kit: UTD-GXTA-W (004-014)

UTD-GXTB-W (018)

UTD-GXTC-W (024)

WLAN adapter:

FG-AC-WIFI21

UTY-TFSXJ3, UTY-TFSXZ1 (007-024)





Auto Louver Grille Kit (Optional)

The slim design of the unit provides comfortable cooling and heating air conditioning over a wide area. The optional automatic louver grille, which fits nicely into any interior decor, provides comfortable air conditioning (Optional)




Dimensions

(Unit: mm)

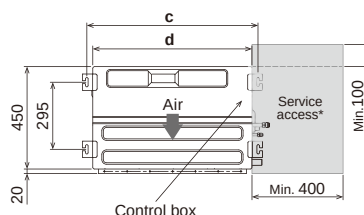

	ARXK 004-014GLGH	ARXK018GLGH	ARXK024GLGH
a	575	775	975
b	P200×2=400	P200×3=600	P200×4=800
c	752	952	1,152
d	700	900	1,100
e	650	850	1,050
f	P100×6=600	P100×8=800	P100×10=1,000

*The design of the service access depends on the installation method. Refer to the installation manual for more information.




Low Static Pressure Duct Slim Duct/ Slim Concealed Floor




Slim design

Slim design allows for installation in a tight ceiling space.

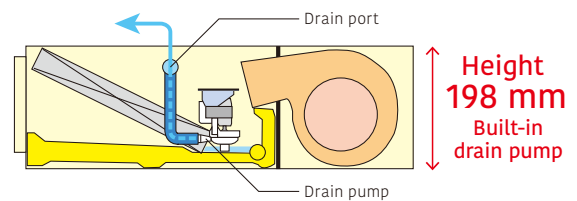


Air intake

Air intake direction can be selected to match the installation site.

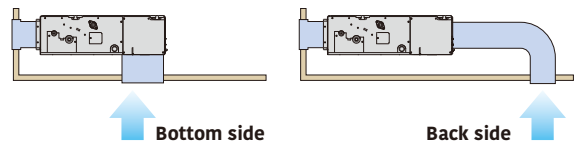


Flexible installation

Ceiling concealed

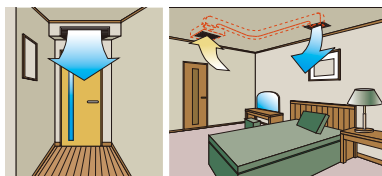

Floor concealed

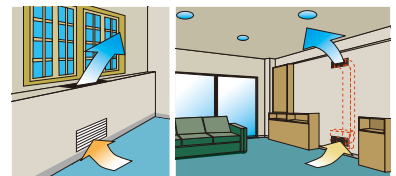

Wide range of static pressures

The use of a DC fan motor makes it possible to adjust the static pressure between 0 and 90 Pa. The static pressure range can be changed by a remote controller.





Static pressure range
0 to 90 Pa

*024 model static pressure range is 0 to 50 Pa.

Filter (Accessory)

ARXD04/007/009/012/014/018 ARXD024



**Model: ARXD04GALH / ARXD007GLEH / ARXD009GLEH
ARXD012GLEH / ARXD014GLEH / ARXD018GLEH
ARXD024GLEH**



ARXD04GALH
ARXD007/009/012/014GLEH



ARXD018GLEH



ARXD024GLEH

Slim
Concealed
Floor



Specifications

Model name			ARXD04GALH*	ARXD007GLEH	ARXD009GLEH	ARXD012GLEH	ARXD014GLEH	ARXD018GLEH	ARXD024GLEH
Power source			Single phase, ~230 V, 50 Hz						
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.5	5.6	7.1
	Heating		1.3	2.8	3.2	4.0	5.0	6.3	8.0
Input power		W	40	44	50	54	92	83	122
Airflow rate	High	m³/h	510	550	600	600	800	940	1,330
	Med-High		-	480	510	530	680	820	1,140
	Med		400/470*1	440	460	490	600	730	1,020
	Med-Low		-	410	420	450	520	630	900
	Low		320/440*1	370	370	410	440	540	780
	Quiet		-	320	320	340	340	470	610
Static pressure range		Pa	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 50
Standard static pressure			25	25	25	25	25	25	
Sound pressure level	High	dB(A)	26	28	29	30	34	34	35
	Med-High		-	26	27	28	32	31	31
	Med		21/25*1	25	25	27	30	29	29
	Med-Low		-	24	24	26	28	27	27
	Low		20/22*1	22	22	24	25	25	24
	Quiet		-	21	21	22	22	23	21
Net Dimensions (H × W × D)		mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620	198 × 1,100 × 620
Weight		kg	17	17	17	18	18	22	26
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)		12.70	9.52	9.52	12.70	12.70	12.70	15.88
Drain Hose Diameter (I.D./O.D.)			25/32						

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

*1: This value is under cooling operation.

*: ARXD04GALH cannot be connected to J-IVS/J-IV/J-IVL/VR-IV series.

Optional parts

*For more details, please refer to the chapter "Optional parts".

Remote sensor unit: UTY-XS2X21

IR receiver unit: UTB-YWC (04)

UTY-TRHX (007-024)

UTY-TFSXJ3 (007-024)

WLAN adapter:

UTY-TFSXZ1 (007-024)

FG-RC-WIF122 (04)

FG-AC-WIF121 (007-024)

External power supply unit: UTZ-GXXA, UTZ-GXXC*

Auto Louver Grille Kit: UTD-GXTA-W (04, 007-014)

UTD-GXTB-W (018)

UTD-GXTC-W (024)


Silver Ion Filter:

UTD-HFTA (04, 007-014)

UTD-HFTB (018)


UTD-HFTC (024)

Drain hose provided as an accessory.

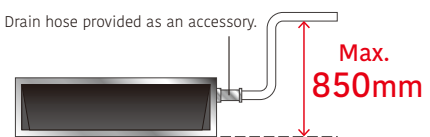


Dimensions

(Unit: mm)

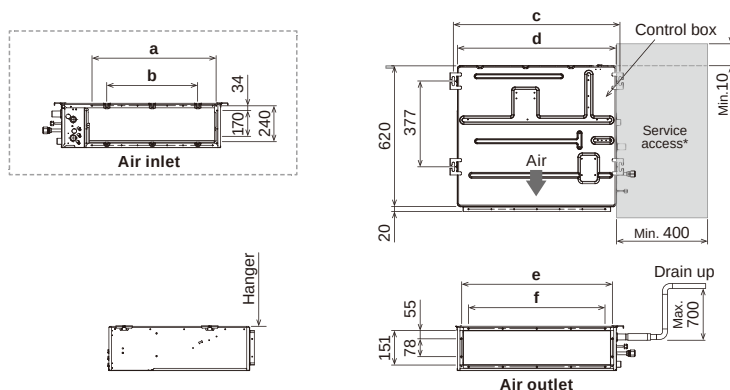

	ARXD04GALH ARXD007-014GLEH	ARXD018GLEH	ARXD024GLEH
a	574	774	974
b	P200×2=400	P200×3=600	P200×4=800
c	734	934	1,134
d	700	900	1,100
e	650	850	1,050
f	P100×6=600	P100×8=800	P100×10=1,000

*The design of the service access depends on the installation method. Refer to the installation manual for more information.




Low Static Pressure Duct

High Efficiency



Slim & Compact design


The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

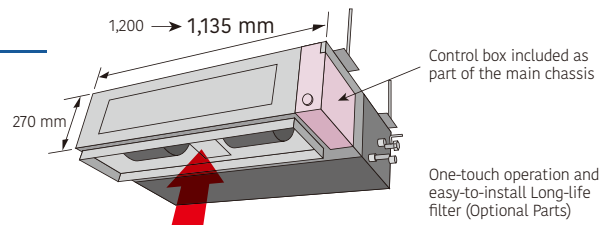

Easy maintenance


Structural improvement has been developed by making the bottom panel in two pieces, front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. The motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing with the main chassis remaining in place.

See below for rear-suction type

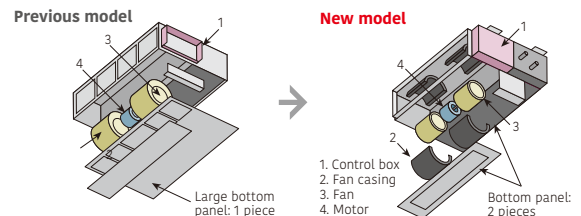


Installation styles


Embedded in Ceiling



Hanging from Ceiling



A drain pipe can be installed on either the left or right side of the unit



High-efficiency DC fan motor achieves low-energy consumption.

Improved motor efficiency from previous model.



024 model



030/036/045 model

Wide range of static pressures

Static pressures can be changed in the range of 0 to 80 Pa.

Static pressure range
0 to 80 Pa

Model: ARXP018GLFH / ARXP030GLFH * Production by order



Specifications

Model name			ARXP018GLFH	ARXP030GLFH
Power source			Single-phase, ~220V, 50Hz	
Capacity	Cooling	kW	5.6	9.0
	Heating		6.3	10.0
Input power		W	128	228
Airflow rate	High	m³/h	1,540 / 1,440	1,940 / 1,660
	Med-High		1,460 / 1,380	1,810 / 1,580
	Med		1,380 / 1,320	1,680 / 1,510
	Med-Low		1,300 / 1,260	1,550 / 1,440
	Low		1,220 / 1,200	1,420 / 1,370
	Quiet		1,150 / 1,150	1,300 / 1,300
Static pressure range		Pa	0 to 80	0 to 80
Standard static pressure			40	50
Sound pressure level	High	dB(A)	35 / 34	39 / 36
	Med-High		34 / 32	38 / 35
	Med		32 / 31	36 / 34
	Med-Low		31 / 30	34 / 33
	Low		29 / 29	32 / 31
	Quiet		28 / 28	30 / 30
Net Dimensions (H × W × D)		mm	270 × 1,135 × 700	270 × 1,135 × 700
Weight		kg	40	40
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52
	Gas (Flare)		12.70	15.88
Drain Hose Diameter (I.D./O.D.)			25/32	

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

Optional parts

*For more details, please refer to the chapter "Optional parts".

Long-life filter: UTD-LF25NA

Flange (square): UTD-SF045T

Flange (round): UTD-RF204

External power supply unit: UTZ-GXXA, UTZ-GXXC*

Remote sensor unit: UTY-XSZXZ1

IR receiver unit: UTY-TRHX


Drain pump unit: UTZ-PX1NBA

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

Silver Ion Filter: UTD-HFND

Dimensions

(Unit: mm)

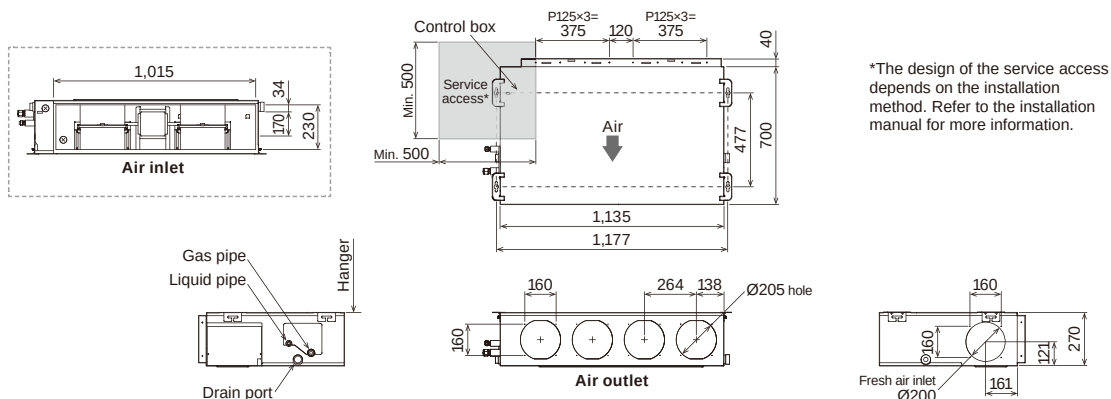


Medium Static Pressure Duct

Normal



Slim & Compact design


The slim and compact design of the indoor unit, with the control box mounted on the side, allows installation in narrow spaces.

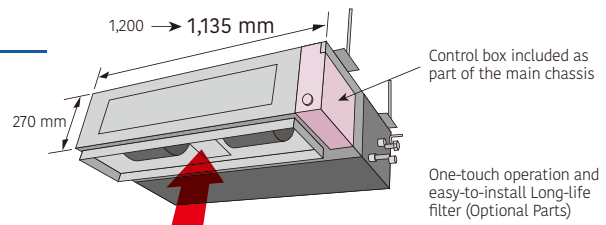

Easy maintenance


Structural improvement has been developed by making the bottom panel in two pieces, front and rear. The internal fan casing is also manufactured in two pieces—upper and lower. The motor and fan can be easily accessed and maintained by removing the rear panel and the lower casing with the main chassis remaining in place.

See below for rear-suction type

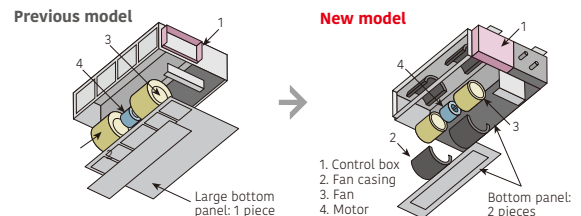


Installation styles


Embedded in Ceiling



Hanging from Ceiling



A drain pipe can be installed on either the left or right side of the unit



High-efficiency DC fan motor achieves low-energy consumption.

Improved motor efficiency from previous model.



024 model



030/036/045 model

Wide range of static pressures

Static pressures can be changed in the range of 0 to 150 Pa.

Static pressure range
0 to 150 Pa

Model: ARXA024GLEH / ARXA030GLEH / ARXA036GLEH / ARXA045GLEH



Specifications

Model name			ARXA024GLEH	ARXA030GLEH	ARXA036GLEH	ARXA045GLEH
Power source			Single phase, ~230 V, 50 Hz			
Capacity	Cooling	kW	7.1	9.0	11.2	12.5
	Heating		8.0	10.0	12.5	14.0
Input power		W	94	108	194	240
Airflow rate	High	m³/h	1,280	1,410	1,840	1,970
	Med-High		1,180	1,350	1,750	1,910
	Med		1,090	1,280	1,660	1,860
	Med-Low		1,000	1,240	1,600	1,780
	Low		920	1,190	1,530	1,710
	Quiet		840	1,150	1,470	1,640
Static pressure range		Pa	0 to 150	0 to 150	0 to 150	0 to 150
Standard static pressure			40	50	50	60
Sound pressure level	High	dB(A)	31	34	37	41
	Med-High		29	33	36	40
	Med		27	32	35	38
	Med-Low		26	31	35	38
	Low		24	30	34	37
	Quiet		23	29	33	36
Net Dimensions (H × W × D)		mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700
Weight		kg	36	40	40	40
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52	9.52
	Gas (Flare)		15.88	15.88	15.88	15.88
Drain Hose Diameter (I.D./O.D.)			25/32			

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

Optional parts

*For more details, please refer to the chapter "Optional parts".

Long-life filter: UTD-LF25NA

Flange (square): UTD-SF045T

Flange (round): UTD-RF204

External power supply unit: UTZ-GXXA, UTZ-GXXC*

Remote sensor unit: UTY-XSZXZ1

IR receiver unit: UTY-TRHX


Drain pump unit: UTZ-PX1NBA

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

Silver Ion Filter: UTD-HFND

Dimensions

(Unit: mm)

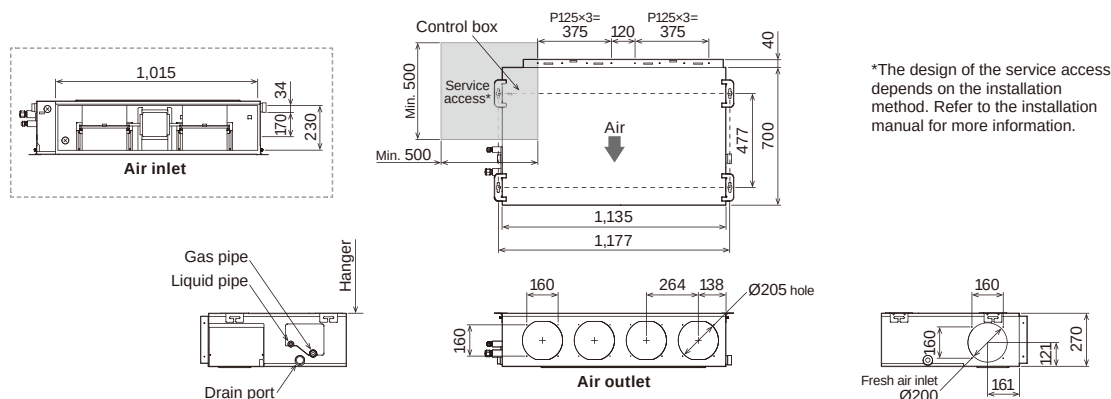

High Static Pressure Duct

Normal



Static pressure mode selection

The use of a DC fan motor makes it possible to adjust the static pressure between 0 to 200 Pa (ARXC036) / 250Pa (ARXC045/060) / 300 Pa (ARXC072/090/096)

MAX.
200 Pa
(036type)



(ARXC036/045/060 type)

MAX.
250 Pa
(045/060type)



(ARXC072/090 type)

MAX.
300 Pa



(ARXC096 type)

Easy installation (Compact & Lightweight)

The indoor unit is designed to be compact and light by reducing the basic chassis size and the overall material weight.



(ARXC036/045/060 type)



(ARXC072/090 type)




(ARXC096 type)

(Unit: mm)

Low noise


Models: ARXC036/ARXC045/ARXC060

The corners of the front panel and fan casing of the indoor unit are shaved to reduce air turbulence. The use of a plastic case and fan reduces the noise level generated by the unit.



ARXC036GTEH:

Plastic fan [42 dB(A)]
* Model: Material
(Actual noise measurement value measured at 100 Pa)



High-efficiency DC fan motor achieves low energy consumption.

Improved motor efficiency compared to the previous model



(ARXC036/045/060 type)



(ARXC072/090/096 type)

**Model: ARXC036GTEH / ARXC045GTEH / ARXC060GTEH
ARXC072GTEH / ARXC090GTEH / ARXC096GTEH**



ARXC036/045/060GTEH



ARXC072/090GTEH



ARXC096GTEH

Specifications

Model name			ARXC036GTEH	ARXC045GTEH	ARXC060GTEH*	ARXC072GTEH*	ARXC090GTEH*	ARXC096GTEH*
Power source			Single phase, ~230 V, 50 Hz					
Capacity	Cooling	kW	11.2	12.5	18.0	22.4	25.0	28.0
	Heating		12.5	14.0	20.0	25.0	28.0	31.5
Input power		W	207	715	730	681	819	838
Airflow rate	High	m³/h	1,990	3,500	3,500	3,900	4,300	4,850
	Med		1,680	3,000	3,000	3,300	4,000	4,250
	Low		1,330	2,460	2,460	3,000	3,500	3,600
Static pressure range		Pa	0 to 200	100 to 250	100 to 250	0 to 300	0 to 300	0 to 300
Standard static pressure			100	100	100	150	150	150
Sound pressure level	High	dB(A)	42	49	49	47	48	48
	Med		36	45	45	43	46	45
	Low		32	42	42	40	44	42
Net Dimensions (H × W × D)		mm	400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500	450 × 1,587 × 700	450 × 1,587 × 700	550 × 1,587 × 700
Weight		kg	40	46	46	84	84	105
Connection pipe diameter	Liquid	mm	9.52 (Flare)	9.52 (Flare)	9.52 (Flare)	9.52 (Flare)	9.52 (Flare)	9.52 (Brazing)
	Gas		15.88 (Flare)	15.88 (Flare)	15.88 (Flare)	19.05 (Flare)	19.05 (Flare)	22.22 (Brazing)
Drain Hose Diameter (I.D./O.D.)			25/32					

Note: Specifications are based on the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

*: ARXC060/072/090/096G cannot be connected to J-IV/J-IVS series.

Optional parts

*For more details, please refer to the chapter "Optional parts".

Long-life filter: UTD-LF60KA (036/045/060)

IR receiver unit: UTY-TRHX

External power supply unit: UTZ-GXXA, UTZ-GXXC*

Remote sensor unit: UTY-XSZXZ1


WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIFI121

Silver Ion Filter: UTD-HFKB (036/045/060)


Dimensions

(Unit: mm)

Models: ARXC036/ARXC045/ARXC060

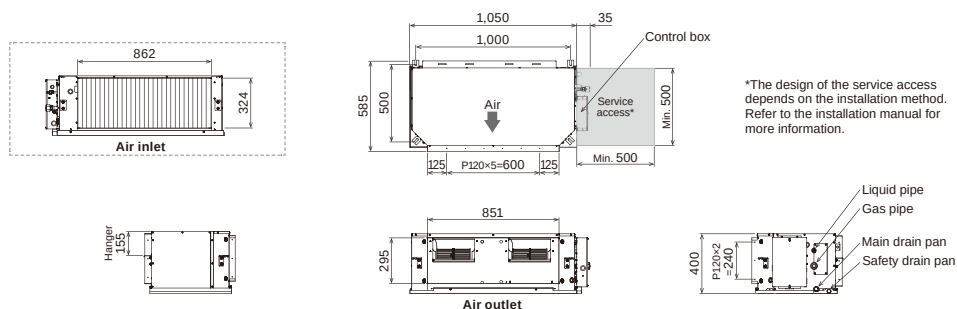

Models: ARXC072/ARXC090/ARXC096

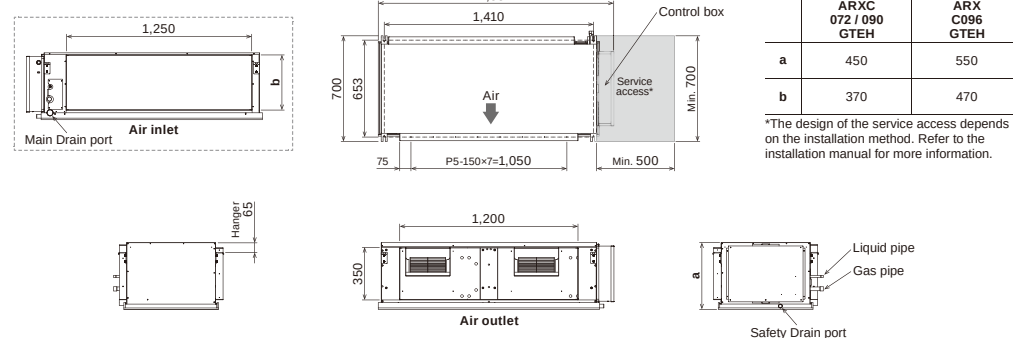

Compact floor




2-fan and wide airflow

A 2-fan individual vertical airflow cools or warms the entire room comfortably.

Cooling




Prevents cold air from falling



Heating


Prevents cold drafts from windows




Flexible and easy installation

The compact and whole-surface suction design provides flexible installation options, including floor-standing, embedded, partially embedded, and wall-mounted installation to match the room layout.

Beneath standard window




Concealed within wall



Wall



Half concealed (Optional parts necessary)




(Unit: mm)

Quiet operation

6-fan speed control for quiet operation (via 2-wire controller)

Low noise
22 dB(A)

004/007/009 models




* Remote controller is compatible with the following:
UTY-RVRY / UTY-RNRVZ5 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGVZ2 / UTY-ALGXZ1 / UTY-APGXZ1



Flexible pipe connection enables draining and piping in 6 directions

The drain hose and pipe can be connected to the unit in the right, left, straight in depth, or downward direction.

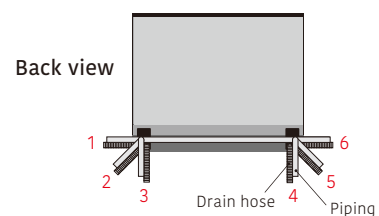

**Model: AGYA004GCGH / AGYA007GCGH / AGYA009GCGH
AGYA012GCGH / AGYA014GCGH**

[external EEV]

**AGYE004GCEH / AGYE007GCEH / AGYE009GCEH
AGYE012GCEH / AGYE014GCEH**



Specifications

Model name			AGYA004GCGH	AGYA007GCGH	AGYA009GCGH	AGYA012GCGH	AGYA014GCGH	AGYE004GCEH	AGYE007GCEH	AGYE009GCEH	AGYE012GCEH	AGYE014GCEH
Power source			Single phase, ~230 V, 50 Hz					Single phase, ~230 V, 50 Hz				
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.0	1.1	2.2	2.8	3.6	4.0
	Heating		1.3	2.8	3.2	4.0	4.5	1.3	2.8	3.2	4.0	4.5
Input power		W	12/14	16	17	22	29	14	16	17	22	29
Airflow rate	High	m³/h	380/430	470	500	590	670	380/430	470	500	590	670
	Med-High		350	420	450	520	590	350	420	450	520	590
	Med		320	390	400	470	520	320	390	400	470	520
	Med-Low		310	360	360	420	450	310	360	360	420	450
	Low		280	330	330	390	390	280	330	330	390	390
	Quiet		210	270	270	340	340	210	270	270	340	340
Sound pressure level	High	dB(A)	35/36	37	38	42	46	35/36	37	38	42	46
	Med-High		33	35	36	39	42	33	35	36	39	42
	Med		31	33	34	37	39	31	33	34	37	39
	Med-Low		30	31	31	35	36	30	31	31	35	36
	Low		28	29	29	33	33	28	29	29	33	33
	Quiet		22	22	22	30	30	22	22	22	30	30
Net Dimensions (H × W × D)		mm	600 × 740 × 200					600 × 740 × 200				
Weight		kg	15.0	15.0	15.0	15.0	15.0	14.5	14.5	14.5	14.5	14.5
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35
	Gas (Flare)		9.52	9.52	9.52	12.70	12.70	9.52	9.52	9.52	12.70	12.70
Drain Hose Diameter (I.D./O.D.)			13.8/15.8 to16.7					13.8/15.8 to16.7				
EV kit (optional)			-					UTR-EV09XB		UTR-EV14XB		

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

When connecting AGHA004/007/009GCGH, AGHE004/007/009GCEH to an outdoor unit other than an outdoor unit of the J-IVL series, the gas pipe diameter should be Ø12.70 mm.

Optional parts

*For more details, please refer to the chapter "Optional parts".


Partially concealing kit: UTR-STA
Silver Ion Filter: UTR-FA03-5

External power supply unit: UTZ-GXXA, UTZ-GXXC*

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

Dimensions

(Unit: mm)

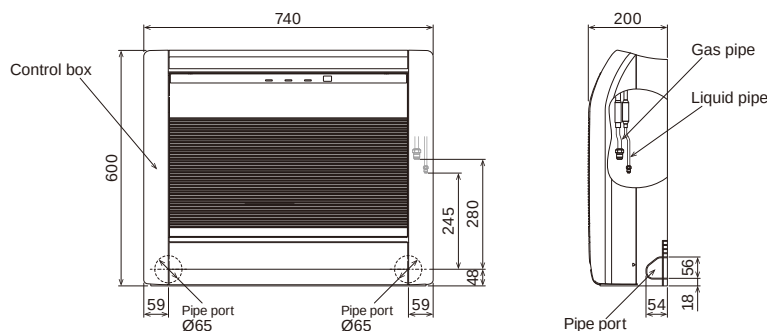

Floor/Ceiling



Flexible installation

Example of floor standing installation

Floor standing console with the back against the wall



Example of ceiling installation


Under ceiling




Double auto swing

The combination of horizontal and vertical swings enables 3-dimensional control of the airflow direction.

RIGHT and LEFT SWING



UP and DOWN SWING



High-power DC fan motor


- High power
- Wide rotation range
- High-efficiency



Compact design

Symmetrical, slim and compact design.

(Unit: mm)



Model: ABYA012GTEH / ABYA014GTEH / ABYA018GTEH / ABYA024GTEH



Floor
standing



Specifications

Model name			ABYA012GTEH	ABYA014GTEH	ABYA018GTEH	ABYA024GTEH
Power source			Single phase, ~230 V, 50 Hz			
Capacity	Cooling	kW	3.6	4.5	5.6	7.1
	Heating		4.0	5.0	6.3	8.0
Input power		W	30	42	74	99
Airflow rate	High	m³/h	660	780	1,000	1,000
	Med-High		620	740	910	930
	Med		580	690	830	870
	Med-Low		550	640	750	800
	Low		520	600	660	740
	Quiet		490	550	580	680
Sound pressure level	High	dB(A)	36	40	46	47
	Med-High		34	39	44	45
	Med		33	38	42	43
	Med-Low		31	36	40	41
	Low		29	35	37	39
	Quiet		28	34	35	37
Net Dimensions (H × W × D)		mm	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655
Weight		kg	25	26	26	27
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	9.52
	Gas (Flare)		12.70	12.70	12.70	15.88
Drain Hose Diameter (I.D./O.D.)			25/32			

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

Optional parts

*For more details, please refer to the chapter "Optional parts".


External power supply unit: UTZ-GXXA, UTZ-GXXC*

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1

Remote sensor unit: UTY-XSZXZ1

Dimensions

(Unit: mm)

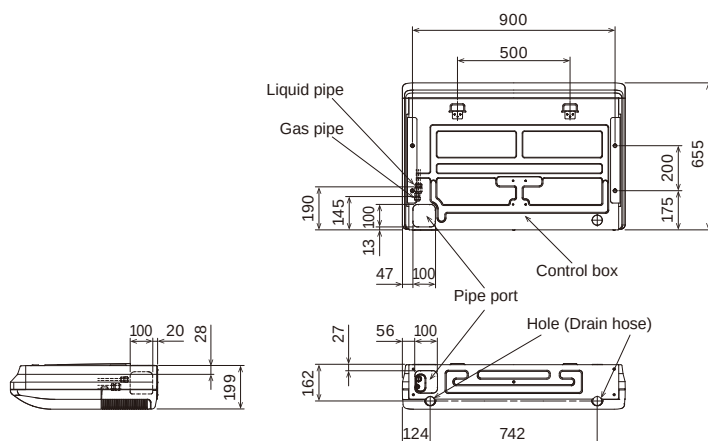


Ceiling




Installation

Open




General installation with indoor unit installed on the ceiling

Concealed



Installation with indoor unit embedded into the ceiling


Wall-mounted type (Locally Available)



Wall-mounting brackets are used to mount the indoor unit on the wall. (Locally available)
This type of installation is used when the ceiling space is insufficient.

Double auto swing and wide airflow

Auto airflow direction and auto swing

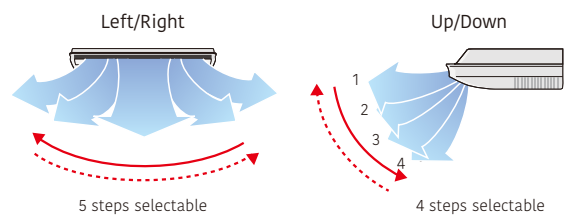


High-power DC fan motor

- High power
- Wide rotation range
- High-efficiency




Long airflow


Long airflow provides comfort in every corner of a large room.



Fresh air intake

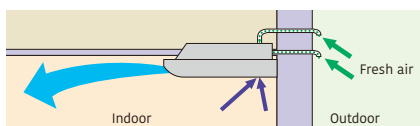

Slim & Compact design



Model: ABYA030GTEH / ABYA036GTEH / ABYA045GTEH / ABYA054GTEH



Specifications

Model name			ABYA030GTEH	ABYA036GTEH	ABYA045GTEH	ABYA054GTEH
Power source			Single phase, ~230 V, 50 Hz			
Capacity	Cooling	kW	9.0	11.2	12.5	14.0
	Heating		10.0	12.5	14.0	16.0
Input power		W	66	85	131	180
Airflow rate	High	m³/h	1,630	1,690	2,010	2,270
	Med-High		1,520	1,560	1,840	2,070
	Med		1,420	1,450	1,690	1,860
	Med-Low		1,320	1,360	1,530	1,660
	Low		1,220	1,270	1,380	1,470
	Quiet		1,140	1,170	1,230	1,280
Sound pressure level	High	dB(A)	42	45	48	51
	Med-High		40	41	46	49
	Med		39	39	45	46
	Med-Low		37	38	41	43
	Low		35	36	38	40
	Quiet		33	34	35	36
Net Dimensions (H × W × D)		mm	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700
Weight		kg	46	48	48	48
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52	9.52
	Gas (Flare)		15.88	15.88	15.88	15.88
Drain Hose Diameter (I.D./O.D.)			25/32			

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.


Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

Optional parts


*For more details, please refer to the chapter "Optional parts".

Drain pump unit: UTR-DPB24T
 Flange: UTD-RF204
 External power supply unit: UTZ-GXXA, UTZ-GXXC*
 WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIF1Z1
 Remote sensor unit: UTY-XS2XZ1

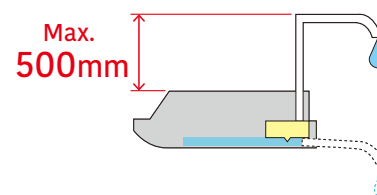

Dimensions

(Unit: mm)

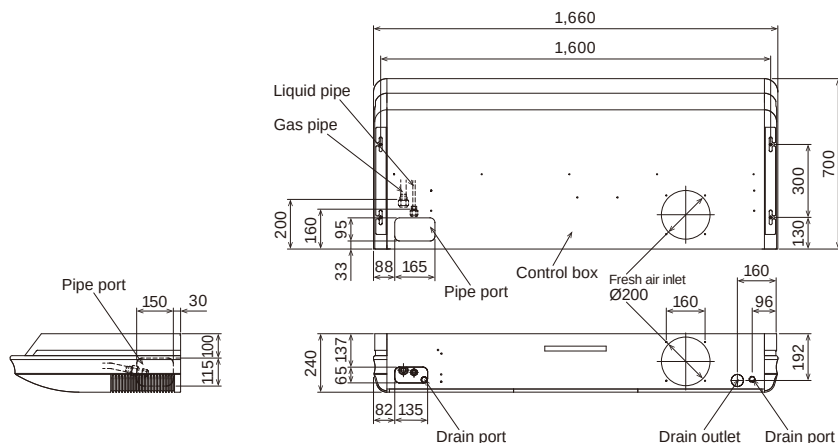

Wall-mounted type



Highly-efficiency, compact design

The 004-014 models share the same design. The high-density and large heat exchanger achieves a highly-efficiency and compact design. The compact body blends in well with conference rooms and offices, providing comfortable air conditioning.

High-density heat exchanger



Slim tube design: 5 mm

Greater heat-exchanging capacity is achieved through the use of a high-density heat exchanger and a sub-heat exchanger.



More comfortable airflow

The unique power diffuser provides comfortable air conditioning.

Heating

The vertical air flow provides powerful floor-level heating.






Cooling

The left/right airflow avoids blowing cool air directly at the occupants in a room.



Quiet operation & 6-Step fan speed control

The airflow pattern achieves significant noise reduction. Multistep airflow adjustment to suit the environment

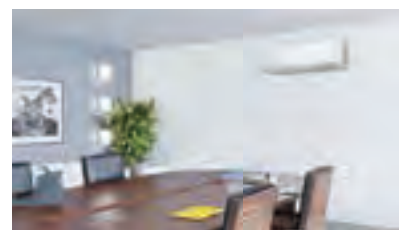


* Remote controller is compatible with the following:
UTY-RVRY / UTY-RNRYZ5 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGYZ2 / UTY-ALGXZ1 / UTY-APGXZ1

The Human sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

* If you want to use the Occupancy sensor control* function, you need an setting device that can set the Occupancy sensor control* function. For example: Wired RC (Touch panel).

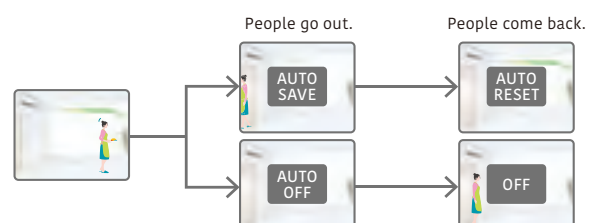

**Model: ASYA004GCGH / ASYA007GCGH / ASYA009GCGH
ASYA012GCGH / ASYA014GCGH**

[external EEV]

**ASYE004GCEH / ASYE007GCEH / ASYE009GCEH
ASYE012GCEH / ASYE014GCEH**



Specifications

Model name			ASYA004GCGH	ASYA007GCGH	ASYA009GCGH	ASYA012GCGH	ASYA014GCGH	ASYE004GCEH	ASYE007GCEH	ASYE009GCEH	ASYE012GCEH	ASYE014GCEH	
Power source			Single phase, ~230 V, 50 Hz						Single phase, ~230 V, 50 Hz				
Capacity	Cooling	kW	1.1	2.2	2.8	3.6	4.0	1.1	2.2	2.8	3.6	4.0	
	Heating		1.3	2.8	3.2	4.0	4.5	1.3	2.8	3.2	4.0	4.5	
Input power			W	12	19	20	25	36	12	19	34	25	36
Airflow rate	High	m³/h	450	550	610	690	800	450	550	610	690	800	
	Med-High		430	510	560	610	740	430	510	560	610	740	
	Med		400	470	510	560	680	400	470	510	560	680	
	Med-Low		380	410	440	530	610	380	410	440	530	610	
	Low		360	360	360	470	550	360	360	360	470	550	
	Quiet		310	310	310	330	330	310	310	310	330	330	
Sound pressure level	High	dB(A)	31	34	37	40	44	31	35	43	40	44	
	Med-High		30	32	35	37	42	30	32	38	37	42	
	Med		28	30	32	35	40	28	30	34	35	40	
	Med-Low		27	28	29	33	37	27	27	29	33	37	
	Low		26	26	26	30	34	26	24	24	30	34	
	Quiet		22	22	22	24	24	22	22	22	24	24	
Net Dimensions (H × W × D)		mm	268 × 840 × 203						268 × 840 × 203				
Weight		kg	8.0	8.5	8.5	8.5	8.5	8.0	8.5	8.5	8.5	8.5	
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	
	Gas (Flare)		9.52	9.52	9.52	12.70	12.70	9.52	9.52	9.52	12.70	12.70	
Drain Hose Diameter (I.D./O.D.)			13.8/15.8 to16.7						13.8/15.8 to16.7				
EV kit (optional)			—						UTR-EV09XB		UTR-EV14XB		

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

When connecting ASY*004G**H, ASY*007G**H, ASY*009G**H to an outdoor unit other than the outdoor unit of the J-IVL series, the gas pipe diameter should be Ø12.70 mm.

Optional parts

*For more details, please refer to the chapter "Optional parts".


External power supply unit: UTZ-GXXA, UTZ-GXXC*
Silver Ion Filter: UTR-FA16-5

Remote sensor kit: UTY-XSZXZ1

WLAN adapter: UTY-TFSXZ1, UTY-TFSXJ3, FG-AC-WIFI21

Dimensions

(Unit: mm)

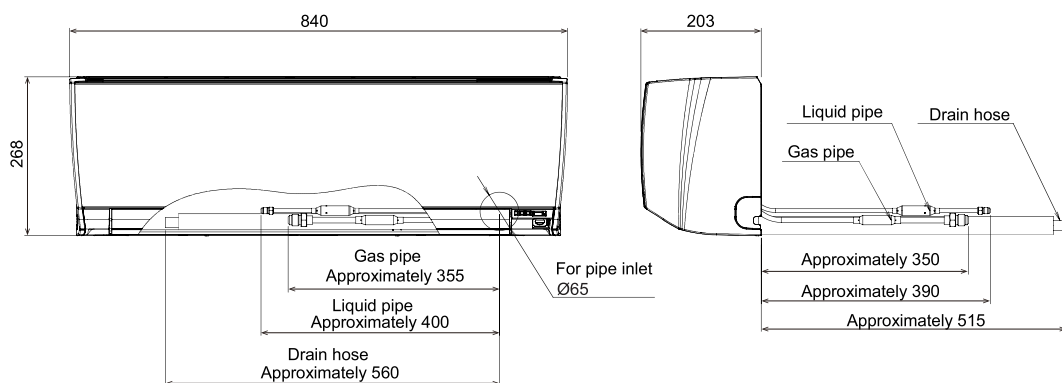

Wall-mounted type



Powerful & Comfort airflow


Powerful Airflow

(ASYA030GTEH)



Power diffuser


(ASYA18/24GBCH)

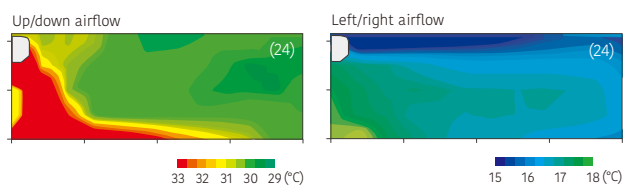

The Human sensor contributes to further energy savings (ASYA030/034GTEH only)



Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

* If you want to use the Human sensor control' function, you need an setting device that can set the Human sensor control' function. For example: Wired RC (Touch panel).

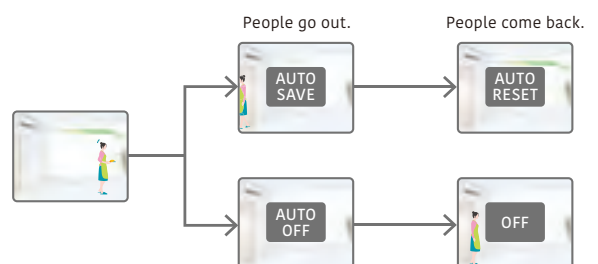

6-step fan speed control for quiet operation

The airflow pattern achieves significant noise reduction. A 6-step sound level setting allows for multiple-step silent operations.



* Remote controller is compatible with the following:
UTY-RVRY / UTY-RNRYZ5 / UTY-RLRY / UTY-RSRY / UTY-RHRY / UTY-DCGYZ2 /
UTY-ALGXZ1 / UTY-APGXZ1

Model: ASYA18GBCH / ASYA24GBCH
ASYA030GTEH / ASYA034GTEH



ASYA18/24GBCH



ASYA030/034GTEH

Specifications

Model name			ASYA18GBCH	ASYA24GBCH	ASYA030GTEH	ASYA034GTEH
Power source			Single phase, ~230 V, 50 Hz		Single phase, ~230 V, 50 Hz	
Capacity	Cooling	kW	5.6	7.1	9.0	10.0
	Heating		6.3	8.0	10.0	11.2
Input power			32	60	74	103
Airflow rate	High	m³/h	840	1,100	1,440	1,620/1,520
	Med-High		-	-	1,200	1,300
	Med		770	910	1,050	1,120
	Med-Low		-	-	940	980
	Low		690	730	890	890
	Quiet		-	-	700	700
Sound pressure level	High	dB(A)	41	48	53	55/54
	Med-High		-	-	49	51
	Med		39	43	45	47
	Med-Low		-	-	42	43
	Low		35	35	39	39
	Quiet		-	-	33	33
Net Dimensions (H × W × D)		mm	320 × 998 × 238	320 × 998 × 238	340 × 1,150 × 280	340 × 1,150 × 280
Weight		kg	15	15	18	18
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	9.52	9.52
	Gas (Flare)		12.70	15.88	15.88	15.88
Drain Hose Diameter (I.D./O.D.)			12/16		13.8/15.8 to16.7	

Note: Specifications are subject to the following conditions:

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].

When connecting ASYA18GBCH to an outdoor unit other than the outdoor unit of the J-IVL series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

Optional parts

*For more details, please refer to the chapter "Optional parts".

External power supply unit: UTZ-GXXA (030/034), UTZ-GXXC* (030/034)
 Remote sensor kit: UTY-XSXZ1


WLAN adapter: UTY-TFSXJ3 (030/034), UTY-TFSXZ1 (030/034)
 FG-RC-WIF1Z2 (18/24), FG-AC-WIF1Z1 (030/034)

Silver Ion Filter: UTR-FA13-3


Dimensions

(Unit: mm)

Models: ASYA18/ASYA24

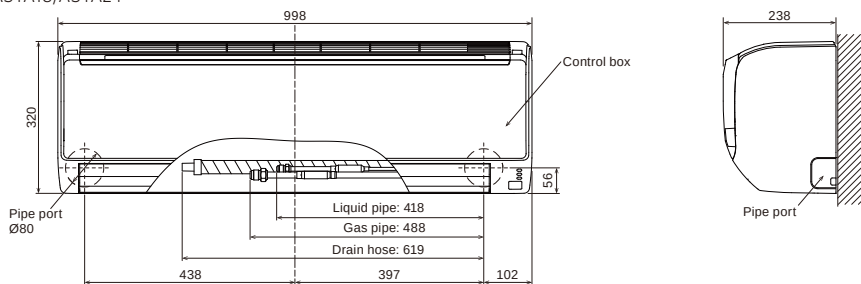

Models: ASYA030/ASYA034

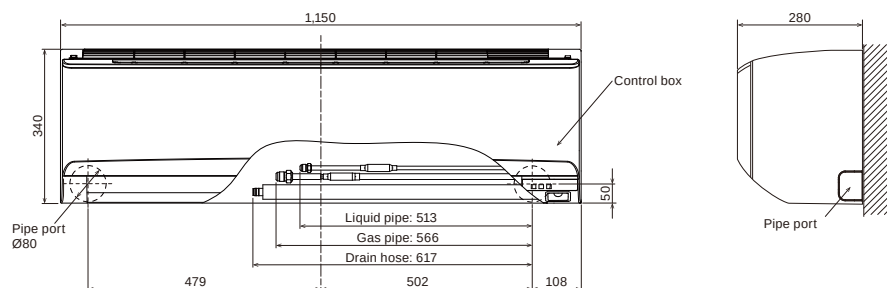





Residential, Commercial & Light Commercial

VENTILATION

VENTILATION Lineup

- Vn-002 Energy Recovery Ventilator
- Vn-004 DX kit for Air handling applications
 - for VRF Outdoor unit
- Vn-006 DX kit for Air handling applications
 - for Single Split Outdoor Units

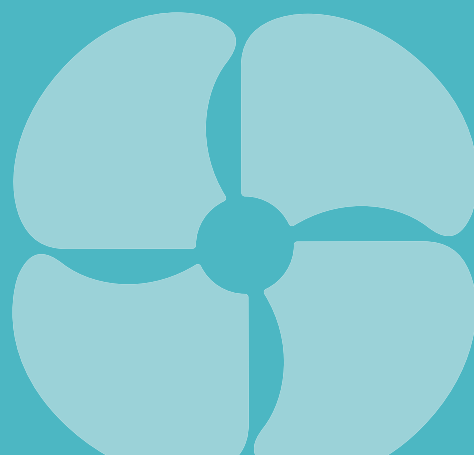

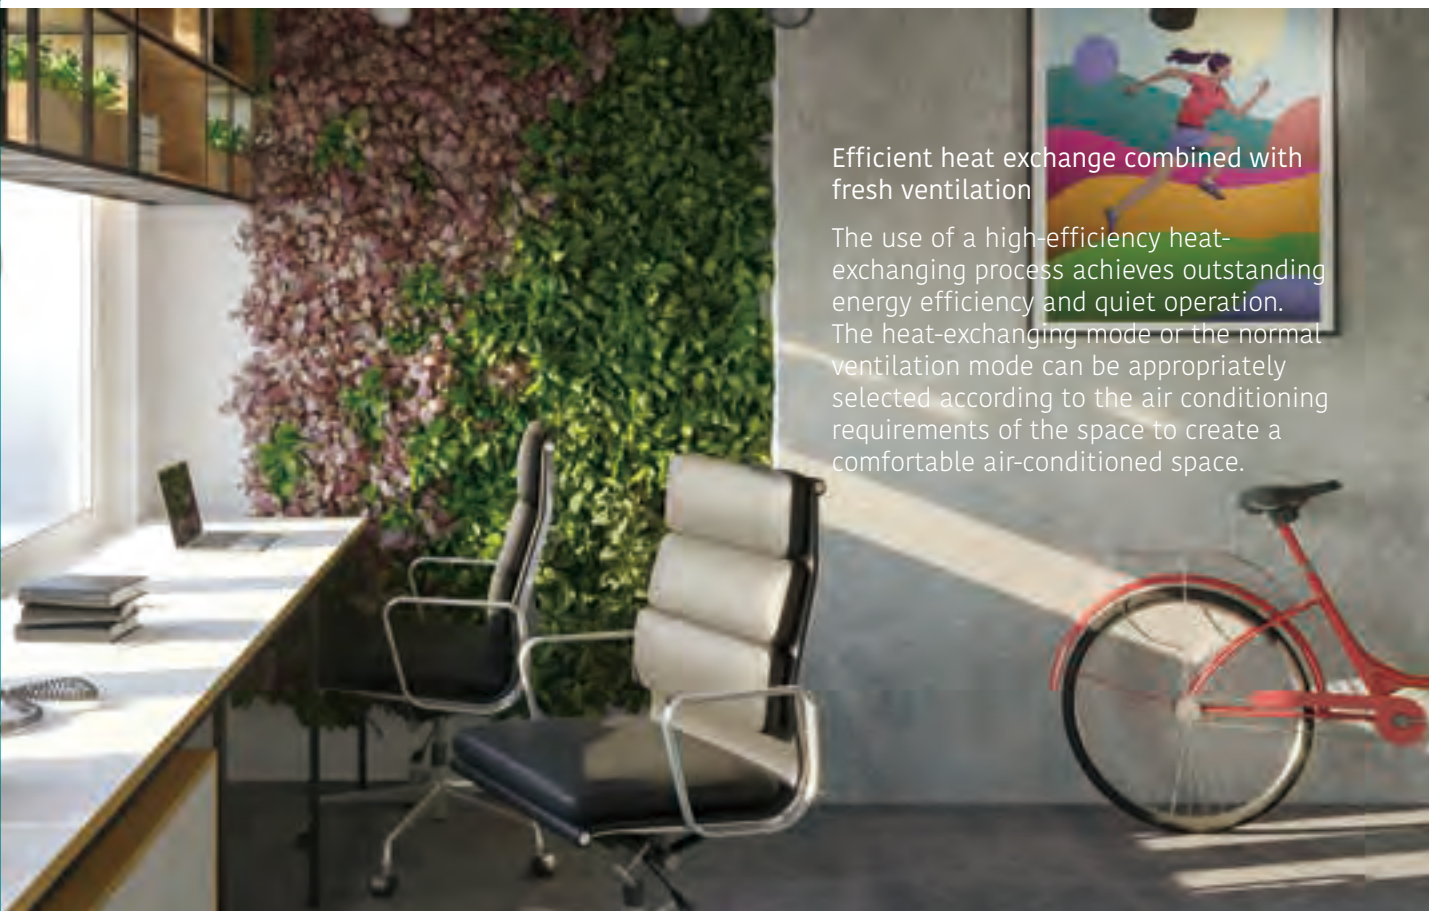

Efficient heat exchange combined with fresh ventilation

The use of a high-efficiency heat-exchanging process achieves outstanding energy efficiency and quiet operation. The heat-exchanging mode or the normal ventilation mode can be appropriately selected according to the air conditioning requirements of the space to create a comfortable air-conditioned space.

Lineup

Airflow rate (m³/h)	250		350		500		800		1000	
Energy Recovery Ventilator										
	UTZ-BD025C		UTZ-BD035C		UTZ-BD050C		UTZ-BD080C		UTZ-BD100C	

Connectable capacity class (kW)	5.0	6.3	8.0	10.0	12.5	14.0	20.0	25.0	40.0	50.0						
DX kit for Air handling applications for VRF Outdoor unit																
	EEV unit UTP-VX30A		Control unit UTY-VDGX		EEV unit UTP-VX60A		Control unit UTY-VDGX		EEV unit UTP-VX90A		Control unit UTY-VDGX		EEV unit UTP-VX90A×2		Control unit UTY-VDGX	

Connectable capacity class (kW)	2.5 - 22.0									
DX kit for Air handling applications for Single Split Outdoor Units										
	UTY-XDZX									

Energy Recovery Ventilator



The energy recovery ventilator unit provides energy efficiency for comfort and improved savings.


Heat exchange ventilation and normal ventilation

Heat exchange ventilation

When a room is cooled or heated, the exhausted cooling or heating energy is recovered by heat exchange ventilation.

Normal ventilation

Used when the indoor space does not require cooling or heating, i.e., when there is little temperature difference between the indoor and outdoor environments.

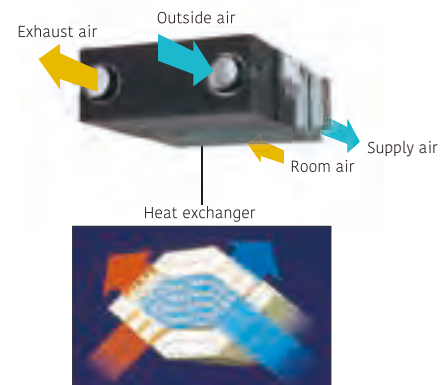


A high-efficiency counter-flow heat-exchanging element is used in the setup.

Energy efficiency and ecology

The use of a counter-flow heat-exchanging element, designed to recover up to 77% of heat from the outgoing air, significantly reduces energy consumption. The air conditioning load is reduced by approximately 20%, which results in substantial savings in energy cost.

Comparison of heat-exchanging elements

Air flows in a straight line through a crossflow element. In contrast, air flows for a longer time (a longer distance) through a counter-flow element to achieve more consistent heat-exchanging performance.

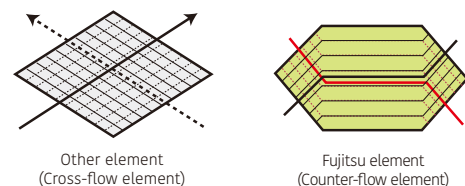

Quiet operation

Significantly lower noise levels are achieved by reducing pressure loss.

25.5dB
(UTZ-BD035C)

Extended range of external static pressure

The use of a powerful fan motor improves the external static pressure. This allows it to be installed in a variety of buildings.

Slim design for easier installation

The use of a counter-flow heat-exchanging element made it possible to design a quieter, slimmer unit.


Height
270mm
UTZ-BD025C

Height
317mm
UTZ-BD035C/BD050C

Height
388mm
UTZ-BD080C/BD100C

Reverse-mountable direct air supply and exhaust system

Simplifies the duct design, due to its straight ducts for air supply and exhaust. Since each unit can be mounted facing opposite directions, only one inspection hole is needed for two units. This makes duct work easier and more flexible.

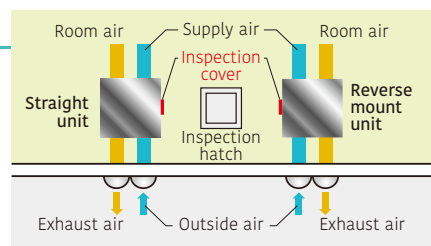

Simple remote operation

Easy operation with connected liquid crystal switch

- Power On/Off
- Air volume High/Low
- Heat exchange ventilation and normal ventilation
- On/Off Timer
- Clean filter display



Model: UTZ-BD025C/UTZ-BD035C/UTZ-BD050C/UTZ-BD080C/UTZ-BD100C




Specifications

Rated flow rate				250 m³/h	350 m³/h	500 m³/h	800 m³/h	1000 m³/h		
Model name				UTZ-BD025C	UTZ-BD035C	UTZ-BD050C	UTZ-BD080C	UTZ-BD100C		
Power source				Single phase, ~220 to 240 V, 50 Hz						
Heat Exchange Ventilation	Input power	(Extra high)/High/Low	W	128/123/96	190/185/168	289/225/185	418/378/295	464/432/311		
	Airflow rate	(Extra high)/High/Low	m³/h	250/25/190	350/350/240	500/500/440	800/800/630	1,000/1,000/700		
	External static pressure	(Extra high)/High/Low	Pa	105/95/45	140/60/45	120/60/35	140/110/55	105/80/75		
	Temperature exchange efficiency	(Extra high)/High/Low	%	75/75/77	75/75/78	75/75/76	75/75/76	75/75/79		
	Energy exchange efficiency cooling	(Extra high)/High/Low	%	63/63/65	66/66/71	62/62/64	65/65/68	65/65/70		
	Energy exchange efficiency heat pump	(Extra high)/High/Low	%	70/70/72	69/69/73	67/67/69	71/71/74	71/71/ 76		
Normal Ventilation	Sound pressure level	(Extra high)/High/Low	dB*	31.5/30.5/26.5	33.0/31.0/25.5	37.5/35.5/32.5	37.5/37.0/34.5	38.5/37.5/34.5		
	Input power	(Extra high)/High/Low	W	128/123/96	190/185/168	289/225/185	418/378/295	464/432/311		
	Airflow rate	(Extra high)/High/Low	m³/h	250/25/190	350/350/240	500/500/440	800/800/630	1,000/1,000/700		
	External static pressure	(Extra high)/High/Low	Pa	105/95/45	140/60/45	120/60/35	140/110/55	105/80/75		
Sound pressure level				(Extra high)/High/Low	(Extra high)/High/Low	(Extra high)/High/Low	(Extra high)/High/Low	(Extra high)/High/Low		
Dimensions				W × D × H	mm	882 × 599 × 270	1,050 × 804 × 317	1,090 × 904 × 317	1,322 × 884 × 388	1,322 × 1,134 × 388
Weight				kg	29	49	57	71	83	
Outlet duct diameter				mm	150	150	200	250	250	
Operating range				°C	-10 to 40	-10 to 40	-10 to 40	-10 to 40	-10 to 40	
Maximum humidity				%	85	85	85	85	85	

* Noise level measured 1.5 m below the center of the unit

Dimensions

(Unit: mm)

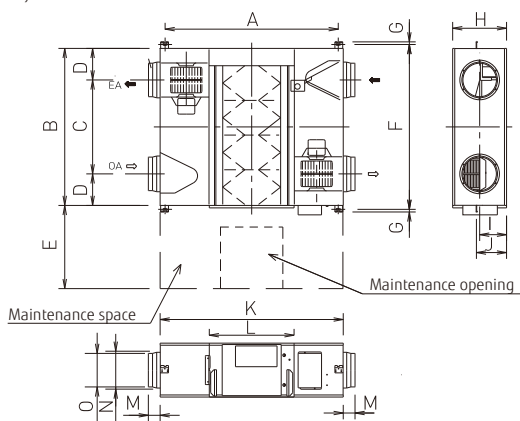


	UTZ-BD025C	UTZ-BD035C	UTZ-BD050C	UTZ-BD080C	UTZ-BD100C
A	810	978	1,018	1,250	1,250
B	599	804	904	884	1,134
C	315	580	640	428	678
D	142	112	132	228	228
E	600	600	600	600	600
F	655	860	960	940	1,190
G	19	19	19	19	19
H	270	317	317	388	388
I	135	159	159	194	194
J	159	182	182	218	218
K	882	1,050	1,090	1,322	1,322
L	414	470	470	612	612
M	95	70	70	85	85
N	Ø164	Ø164	Ø210	Ø258	Ø258
O	Ø144	Ø144	Ø194	Ø242	Ø242

DX kit


for Air handling applications
for VRF Outdoor unit

With these kits, air handling units (AHUs) and fan coil units (FCUs) from other manufacturers can be incorporated into Fujitsu General VRF systems, or one AHU can be connected to one Fujitsu General VRF dedicated outdoor unit to control outdoor ventilation and room temperatures.

Multiple temperature sensors optimally control an Air handling unit and a fan coil unit.




When connected to an Air handling unit, the temperature of supply air is controlled by a discharge air sensor.




When connected to a fan coil unit, the room temperature is controlled by the discharge air sensor.

Application as part of a VRF system

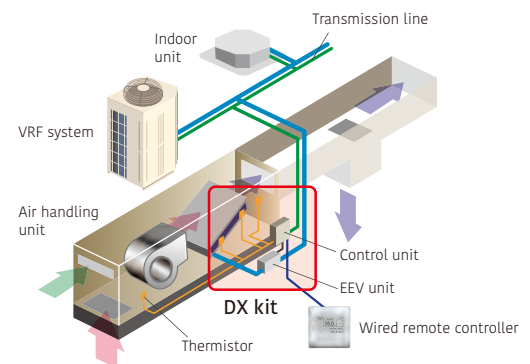


Supports a wide range of capacity classes

- Two EEV units can be connected in parallel to large-capacity units of up to 20 HP (50 kW). (UTP-LX180A separation tube required)
- Connectable capacity range: 5 kW to 50 kW

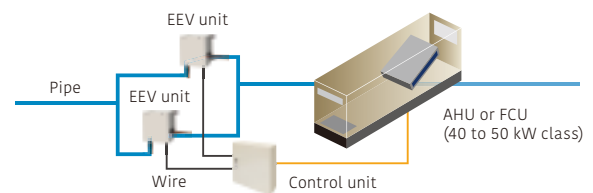


A variety of control options that meet application requirements

Central control enabled by our VRF controllers or central management controllers

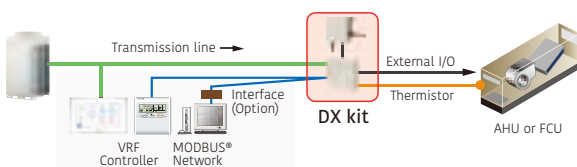

Central control from external controllers

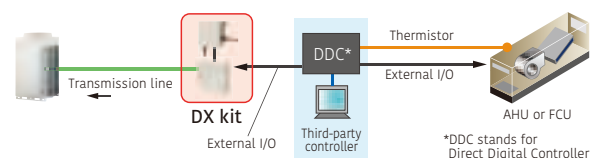

*DDC stands for Direct Digital Controller

Summary of functions

Inputs

- On/Off
- Setting temperature
- Capacity demand
- Heating/Cooling operation modes
- Fault information

Outputs

- On/Off indication
- Fan On/Off indication
- Thermostat On/Off indication
- Defrost indication
- Fault indication

MODBUS® Control

Can be controlled via a MODBUS®-enabled BMS using an optional interface.

Installation requirements


- Connectable VRF series: All VRF series
- Capacity range of connectable DX kit systems with outdoor units: 50 to 100% of capacity
- Capacity range of connectable DX kit systems with indoor units: 30% or less of capacity
- Max. wire length from a control unit: 10 m
- Max. pipe length between EEV unit and indoor unit: 5 m
- A control unit (IP54 class) and an EEV unit can be installed outdoors.

Optional separation tube to connect two EEV units: UTP-LX180A




Connectable capacity


• Single connection



• Mixed connection



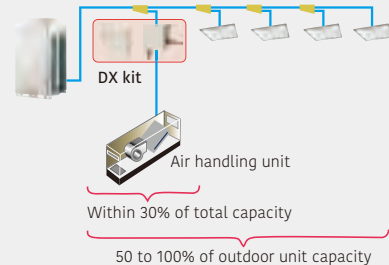


Pipe and wire length

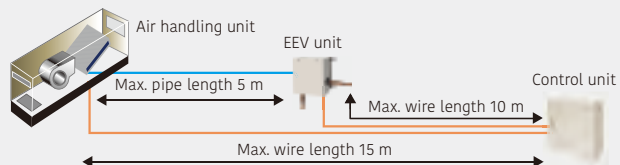

Control unit: UTY-VDGX

EEV unit: UTP-VX30A/UTP-VX60A/UTP-VX90A



Specifications

Connectable capacity class			5.0 kW	6.3 kW	8.0 kW	10.0 kW	12.5 kW	14.0 kW	20.0 kW	25.0 kW	40.0 kW	50.0 kW
Capacity	Cooling	kW	5.6	6.3	8.0	10.0	12.5	14.0	22.4	25.0	40.0	50.4
	Heating	kW	6.3	7.1	9.0	11.2	14.0	16.0	25.0	28.0	45.0	56.5

Control unit		UTY-VDGX	
Power source	V/Ø/Hz	230/1/50	
Dimensions (H × W × D)	mm	400 × 400 × 120	

EEV unit		UTP-VX30A	UTP-VX60A	UTP-VX90A	UTP-VX90A × 2
Connection pipe diameter (Liquid)	mm	Ø9.53	Ø12.70	Ø12.70	Ø12.70
Dimensions (H × W × D)	mm	160 × 220 × 90			

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 7.5 m Voltage: 230 [V].

DX kit

for Air handling
applications


for Single Split Outdoor Units



With this kit, other manufacturers' Air handling units (AHUs) and fan coil units (FCUs) can be incorporated into Fujitsu General Split outdoor units.

Flexible connectivity

This kit allows connections to third-party equipment. This control unit can also be used in conjunction with Fujitsu General single-split outdoor units, providing a perfect solution when a stand-alone Air handling unit is needed.

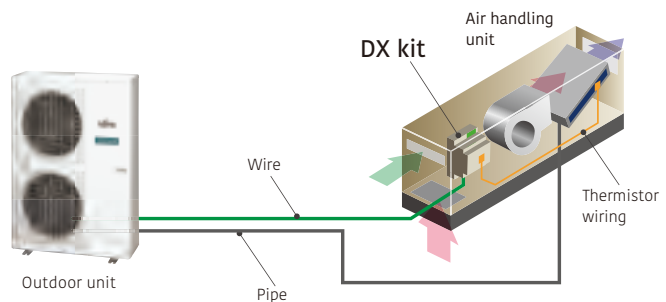


Supports a wide range of capacity classes

Capable of connecting large capacities in the range of 2.5 kW to 22.0 kW (Nominal)



Mobile devices allow for operation from anywhere

Can be operated and managed remotely using your smartphone or tablet.

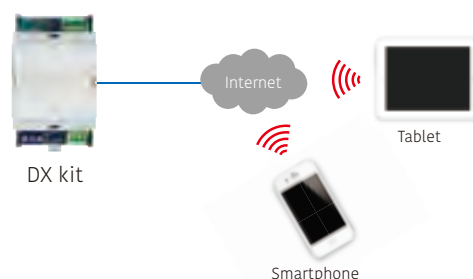

Summary of functions

Inputs

- On/Off
- Heating/Cooling operation modes
- Capacity demand (analogue 0 to 10 V)
- Heat exchanger temperature

Outputs


- Status of Compressor, Defrost, and Errors (Potential free relays)
- Status indicator with LED

Wireless LAN Control

Wireless LAN control through cloud connectivity enables secure remote monitoring and control from anywhere.

Easy installation

- Compact DIN rail mountable enclosure for easy installation
- No expansion device required
- No separate external power supply required

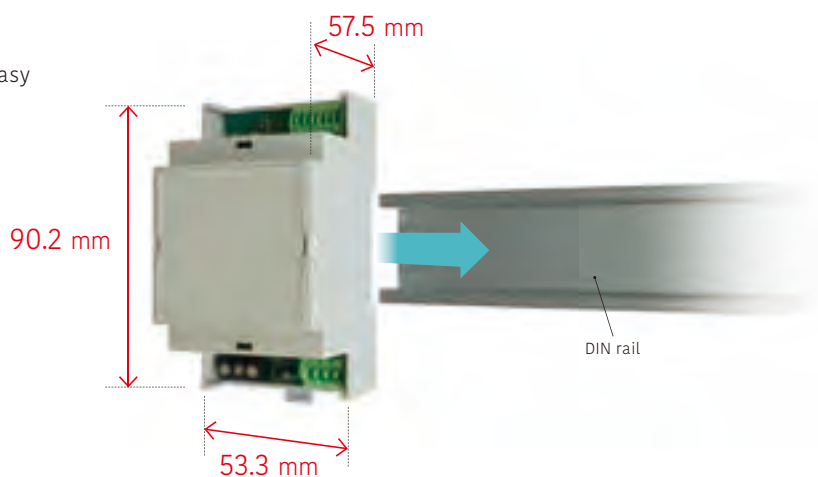

Model: UTY-XDZX



Specifications

R410A models

BTU			12	14	18	24	30	36	45	54	60	72	90
Capacity (Nominal)	Cooling	kW	3.5	4.3	5.2	6.8	8.5	9.4	12.1	13.3	15.0	19.0	22.0
	Heating		4.1	5.0	6.0	7.8	10.0	10.8	13.3	15.8	18.0	22.4	27.0

R32 models

BTU			09	12	14	18	22	24	30	36	45	54
Capacity (Nominal)	Cooling	kW	2.5	3.5	4.3	5.2	6.0	6.8	8.5	9.4	12.1	13.3
	Heating		3.2	4.1	5.0	6.0	7.0	7.5	10.0	10.8	13.3	15.8

Model name		UTY-XDZX	
Power source	V/Ø/Hz	230/1/50	
Dimensions (H × W × D)	mm	90.2 × 53.3 × 57.5	
Weight	g	110	

Note: Specifications are based on the following conditions.

Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.

Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.

Pipe length: 5.0 m Voltage: 230 [V].

Light Commercial & Commercial, Residential

CONTROL SYSTEM & OPTIONAL PARTS

- C-002 Control System Overview
- C-006 Best control solution for each building structure
- C-008 Comparison table of controllers
- C-052 Controller System List
- C-068 Optional Parts Overview
- C-076 Optional parts list
- C-084 Function list



A wide product lineup to meet a variety of needs

We can flexibly meet customer needs through a variety of offerings including wired and wireless individual remote controllers, central remote controllers that simultaneously control multiple indoor units, and a variety of converters that link with other systems.

CONTROL SYSTEM

INDIVIDUAL CONTROL

- C-010 Wired remote controller (Design type)
- C-012 Wired remote controller (with touch panel)
- C-014 Wired remote controller / Compact wired remote controller
- C-015 Wired remote controller
- C-016 Simple remote controller
- C-017 Wireless remote controller
- C-019 IR receiver unit

CONVERTERS/ADAPTERS

- C-022 WLAN adapter
- C-025 Multiple protocol WLAN adapter

CENTRALIZED CONTROL

- C-026 Home central remote controller
- C-028 Central remote controller
- C-030 Touch panel controller
- C-034 System controller **Software** / System controller lite **Software**

CONVERTERS/ADAPTERS

- C-038 MODBUS® converter for indoor unit
- C-039 MODBUS® interface
- C-040 MODBUS® converter for VRF
- C-041 BACnet® interface
- C-042 BACnet® gateway **Software**
- C-043 BACnet® gateway **Hardware**
- C-044 BACnet®/MODBUS® router
- C-045 BACnet®/MODBUS® cloud device
- C-046 KNX® converter for indoor unit / KNX® converter for VRF
- C-047 KNX® interface
- C-048 Network converter for single-split type
- C-049 Network converter for LONWORKS™
- C-050 External switch controller / Signal amplifier

Optional parts

- C-070 Silver ion filter
- C-071 Auto louver grille kit
- C-072 Pressure sensor kit
- C-073 External power supply unit
AIR BEAM radiation air outlet unit
- C-074 Gas sensor kit
- C-092 Separation tube and other
piping products



SPLIT



MULTI-SPLIT



VRF J series



VRF V series

Control System Overview

for Split & Multi-split

All indoor units* are equipped with a wireless or wired remote controller as standard. Additional options are available, such as individual remote controllers and central remote controllers. The easy-to-operate central remote controller makes it simple to control the operation mode, temperature, airflow volume, timer, and other functions of each indoor unit from a single location.

* Except for some products

Air Conditioning

Individual control



Wired remote controller

A built-in thermo sensor monitors and controls room temperature accurately.



Wireless remote controller


Simple and versatile operations with a choice of 4 different types of timers



Simple remote controller

Compact remote controller with basic functionality

For Ceiling type



For Duct type



For Cassette type



IR receiver unit

This IR receiver unit enables a wireless remote controller to control a duct-type indoor unit.

Air Conditioning

Centralized control



Home central remote controller for 5 & 6-unit Multi-split type

Enables individual and central control.





Converters / Adapters

For external control via BMS/Home Automation Systems

MODBUS® converter
for indoor units
UTY-VMSX



MODBUS® interface
for indoor units



KNX® converter
for indoor units
UTY-VKSX



KNX® interface
for indoor units



WLAN adapter



Network converter

DC power supply
type
UTY-VTGX



AC power supply
type
UTY-VTGXV



Online Control (Wireless Control via Smartphone/Tablet)

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.

WLAN adapter

The dedicated WLAN adapter enables the air conditioner to be operated by smartphone or tablet computer.



AIRSTAGE
Mobile


Download Free

Download on the
App Store

GET IT ON
Google play

Simple, user-friendly interface design

The designed screen display makes it easier than ever to operate.

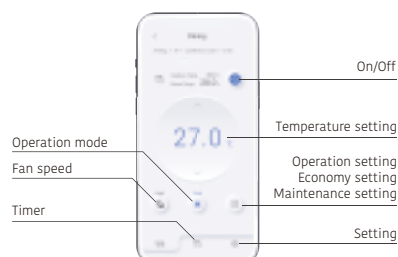

Control System Overview

for VRF

To meet the diverse needs of customers, we offer a variety of control options for our VRF systems, such as individual control, centralized control, and building management system (BMS) options.

Air Conditioning Individual control



**Wired remote controller
(Design type)**
UTY-RVRY



**Wired remote controller
(with touch panel)**
UTY-RNRYZ5



Wired remote controller
UTY-RLRY



**Compact wired
remote controller**
UTY-RCRYZ1



Simple remote controller
UTY-RSRY
UTY-RHRY
Without operation mode



Wireless Remote Controller
UTY-LNVY
UTY-LNHY



For Duct
type



For One-way flow
cassette Series/
3D-flow cassette
Series/duct type



for Circular flow
cassette Series


IR receiver unit

UTB-YWC
for duct type

UTY-TRHX
for One-way flow cassette Series/
3D flow cassette Series/
duct type

UTY-LBHxD
for Circular flow cassette Series

Air Conditioning Centralized control

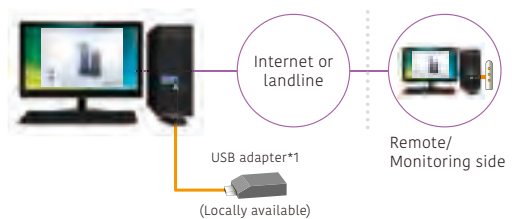

System controller **Software**
UTY-APGXZ1/UTY-ALGXZ1 (Lite version)

Up to
1600^{*2}
Indoor units

*1: Echelon® U10 USB Network Interface

*2: The Lite version controls up to 400 indoor units.



Touch panel controller
UTY-DTGYZ1

Remote/
Monitoring side

Internet or
landline

Up to
400
Indoor units



**Central remote
controller**
UTY-DCGYZ3

Up to
100
Indoor units



Converters / Adapters

For external control via BMS/Home Automation Systems

BACnet® gateway

UTY-ABGXZ1 **Software**



VTY-VBGX **Hardware**



BACnet® interface
for Indoor units

FG-IR-BMG1Z1



Network converter
(For LONWORKS™)

UTY-VLGX



MODBUS® converter
for Indoor units

UTY-VMSX



for VRF

UTY-VMGX



KNX® converter
for Indoor units

UTY-VKX



for VRF

UTY-VKGX



WLAN adapter

UTY-TFSXJ3 / UTY-TFSXZ1



External switch controller

UTY-TERX



Card-key
(Locally available)




Internet device



BMS/BAS*3



BMS*3, Home automation system



*3: BMS/BAS: Building Management System/Building Automation System

Converters / Adapters

for system expansion

Network converter
DC power supply type
UTY-VTGX



Network converter
AC power supply type
UTY-VTGXV



Signal amplifier
UTY-VSGXZ1



Best control solution for each building structure

Fujitsu General provides the best control solutions suitable for various building structures.

SHOP

Type	Individual control				Centralized control			Integrating control (Interface)		
	Wired remote controller	Central remote controller	Touch panel controller	System controller	Network converter for LonWorks™	MODBUS® Converter	KNX® converter			
	UTY-RVRY UTY-RNRYZ5 UTY-RLRY UTY-RVNYM UTY-RCRYZ1	UTY-DCGYZ3	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-VLGX	UTY-VMGX	UTY-VKGX			
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	•	•	•	•						
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.		•	•	•	•	•	•			
Group control		•	•	•						
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.				•						
Remote monitoring management		•	•	•						
Manage multiple sites		•	•	•						
Monitor energy consumption				•						
Control third-party products				•						
Integrate Fujitsu General air conditioning into BMS					•	•	•			

HOTEL

Type	Individual control			Centralized control			Integrating control (Interface)				
	Wired remote controller	Simple remote controller	Wireless remote controller	Central remote controller	Touch panel controller	System controller	BACnet® gateway	Network converter for LonWorks™	MODBUS® converter	KNX® converter	External switch controller
	UTY-RVRY UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	UTY-RSRY UTY-RHRY	UTY-LNRY UTY-LNHRY UTY-LNTY	UTY-DCGYZ3	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-ABGXZ1 UTY-VBGX	UTY-VLGX	UTY-VMGX	UTY-VKGX	UTY-TERX
Local control for hotel guests	•	•	•								
Centralized air conditioning control for common areas				•	•	•	•	•	•	•	
Limited control for hotel guests				•	•	•	•	•	•	•	
Remote monitoring management				•	•	•					
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.						•	•				
Monitor energy consumption						•					
Control third-party products						•					
Integrate Fujitsu General air conditioning into BMS							•	•	•	•	
Interlock with window contact											•
Interlock with key card											•

OFFICE

Type	Individual control			Centralized control			Integrating control (Interface)				
											
	Wired remote controller UTY-RVRY UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	Simple remote controller UTY-RSRY UTY-RHRY	Wireless remote controller UTY-LNVY UTY-LNHY UTY-LNTY	Central remote controller UTY-DCGYZ3	Touch panel controller UTY-DTGYZ1	System controller UTY-APGXZ1 UTY-ALGXZ1	BACnet® gateway UTY-ABGXZ1 UTY-VBGX	Network converter for LonWorks™ UTY-VLGX	MODBUS® converter UTY-VMGX	KNX® converter UTY-VKGX	External switch controller UTY-TERX
Local control for office staff	●	●	●	●							
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	●		●	●	●	●	●				
Centralized air conditioning control for management				●	●	●	●	●	●	●	
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.				●	●	●	●	●	●	●	
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.						●	●				
Remote monitoring management				●	●	●					
Electricity charge apportionment					●	●	●				
Monitor energy consumption						●					
Control third-party products						●					
Integrate Fujitsu General air conditioning into BMS							●	●	●	●	
Interlock with door contact											●
Interlock with Human sensor for meeting room				●							●

Comparison table of controllers

Item									
Model name		UTY-RVRY	UTY-RNRYZ5	UTY-RLRY	UTY-RVNYM	UTY-RCRYZ1	UTY-RSRY	UTY-RHRY	
Maximum number of controllable remote controller groups		1	1	1	1	1	1	1	
Maximum number of controllable indoor units		16	16	16	16	1	16	16	
Maximum number of controllable groups		—	—	—	—	—	—	—	
Air conditioning control functions	ON/OFF	●	●	●	●	●	●	●	
	Operation mode setting	●	●	●	●	●	●	—	
	Fan speed control	●	●	●	●	●	●	●	
	Room temperature setting	●	●	●	●	●	●	●	
	Set temperature in 0.5°C increments	●	●	●	—	●	●	●	
	Setting temperature range limitation	●	●	●	●	—	●	●	
	Test operation	●	●	●	●	●	●	●	
	Vertical louver setting	●	●	●	●	●	●	●	
	Horizontal louver setting	●	●	●	●	●	—	—	
	Individual louver control	●	●	—	—	●	—	—	
	Group setting	—	—	—	—	—	—	—	
	Remote controller prohibition	—	—	—	—	—	—	—	
	Anti-freeze setting	●	●	—	—	●	—	—	
	Set temperature auto return	●	●	●	●	—	—	—	
	Economy mode setting	●	●	●	●	●	—	—	
	Human sensor control	●	●	—	—	—	—	—	
Displayed items	Error	●	●	●	●	●	●	●	
	Defrosting	●	●	●	●	●	●	●	
	Current time	●	●	●	●	—	—	—	
	Day of week	●	●	●	●	—	—	—	
	Remote controller prohibition	●	●	●	●	●	●	●	
	Address display	●	●	●	●	●	●	●	
	Room temperature	●	●	—	●	●	●	●	
	Multiple language support	●	●	—	●	—	—	—	
	Setting for daylight saving time	●	●	—	●	—	—	—	
	Name registration	●	●	—	—	—	—	—	
	Backlighting	●	●	—	●	●	●	●	
	2D floor layout/3D building display	—	—	—	—	—	—	—	
	Refrigerant leak detector	—	—	—	—	—	—	—	
	Refrigerant Cycle Monitor	●	●	—	—	—	—	—	
	Logo Display	●	—	—	—	—	—	—	
	Limited Visibility of Settings	●	—	—	—	—	—	—	
Timer	Schedule timer	Period	Week	Week	Week	Week	—	—	
		ON/OFF, Temp, Low noise mode*5, Times per day	8	8	4	8	—	—	
	ON/OFF timer		—	●	●	●	●(OFF only)	—	
	Sleep timer		—	—	—	—	—	—	
	Program timer		—	—	—	—	—	—	
	Auto-off timer		●	●	●	●	—	—	
	Day off		●	●	●	●	—	—	
	Minimum unit of timer setting (minutes)		1 • 10	10 • 30	30	30	—	—	
Control	Remote monitoring management system		—	—	—	—	—	—	
	Electricity charge apportionment		—	—	—	—	—	—	
	Error history		●	●	●	●	—	—	
	Emergency stop		—	—	—	—	—	—	
	Remote monitoring management		—	—	—	—	—	—	
	Energy-saving management		—	—	—	—	—	—	
	E-mail notification in case of failure		—	—	—	—	—	—	
	Key lock		● Child lock	● Child lock	● Child lock	● Child lock	—	—	
Low noise mode		—	—	—	—	—	—	—	

	Wireless remote controller	Wireless remote controller	Wireless remote controller	Wireless remote controller	Home central remote controller (for 5/6-unit multi- split type)	Central remote controller	Touch panel controller	System controller Lite Software	System controller Software
	UTY-LNTY	UTY-LNVY	UTY-LNHY	UTY-LNWX	UTY-DMMYM	UTY-DCGYZ3	UTY-DTGYZ1	UTY-ALGXZ1	UTY-APGXZ1
1	1	1	1	1	1	100	400	400	1600
16	16	16	16	16	8	100	400	400	1600
—	—	—	—	—	—	50	400	400	1600
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●	●
—	●	—	—	●	—	●	●	—	—
—	—	—	—	●	—	●	●	●	●
●	●	●	●	●	—	●	●	—	—
●	●	●	●	—	—	●	●	●	●
—	●	●	●	●	—	●	●	●	●
—	—	—	—	—	—	●	●*3	—	—
—	—	—	—	—	—	●	●	●	●
—	—	—	—	—	●	●	●	●	●
—	—	—	—	—	—	●	●	●	●
—	—	—	—	—	—	—	●	—	—
●	●	●	●	●	●	●	●	●	●
—	—	—	—	—	●	●	●	●	●
—	—	—	—	—	●	●	●	●	●
—	—	—	—	—	—	—	●	●	●
●	●	●	—	—	●	●	●	●	●
—	—	—	—	—	—	●	●	●	●
—	—	—	—	—	●	●	●	●	●
—	—	—	—	—	—	—	—	—	—
—	—	—	—	●	—	—	●	●	●
—	—	—	—	—	—	●*4	●*4	●*4	●*4
—	—	—	—	—	●	●	●	●	●
—	—	—	—	—	●	●	●	●	●
—	—	—	—	—	—	●	●	●	●
—	●	—	—	●	●	●	●	—	—
—	—	—	—	—	—	—	—	—	●
—	—	—	—	—	—	●	●	●	●
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	Week	Year	Year	Year	Year
—	—	—	—	—	4	20	20	144	144
●	●	●	●	●	—	—	—	—	—
●	●	●	●	●	—	—	—	—	—
●	●	●	●	●	—	●	—	—	—
—	—	—	—	—	—	●	●	—	—
—	—	—	—	—	●	●	●	●	●
5	5	5	5	5	5	10	10	10	10
—	—	—	—	—	—	●	●	●	●
—	—	—	—	—	—	—	○	○	●
—	—	—	—	●	—	●	●	●	●
—	—	—	—	—	—	●*2	●*2	—	—
—	—	—	—	—	—	●	●	○	●
—	—	—	—	—	—	—	—	○	○
—	—	—	—	—	—	●	●	●	●
—	—	—	—	—	●	● setting	● setting	● setting	● setting
—	—	—	—	—	●	●	●	●	●

*1 "Operation mode" setting not available.
*2 Available only for external input control.

*3 Monitoring sites can be set up.
The main unit side can only be operated to cancel the settings.

*4 Available only when using Wired remote controller.
*5 UTY-DCGYZ3 only

●: Supported ○: Optional function —: Unsupported

Wired remote controller (Design type)

UTY-RVRY



Up to
16 indoor units
Up to
1 group



reddot winner 2024



Simple and stylish design that harmonizes with the space

- The new stylish design controller, UTY-RVRG, enables intuitive operation with touch screen. It is compatible with many 2-wired indoor units.

Harmonizes with the Installation Space

When not in use, the controller is a part of the interior décor. This is achieved by using mirrors, glass, and clear panels, and it appears to be one with the wall. The sleek and stylish design won the 2022 Good Design Award and was selected as a finalist for the 2023 IDEA award.



Intuitive operation

The touch screen is easily operated by swiping vertically and horizontally, and users can operate the controller without using manuals.

Temp. Setting



Operation Mode



Status LED Colors

When not in use, the operation mode is indicated through LED lamp colors shown under the controller. The LED lamp can be switched ON and OFF to avoid glare at night.



Blue: Cooling



Red: Heating



Green: Dry



Purple: Auto

Features: Wired Remote Controller (Design type)

Refrigerant cycle monitor

The controller will display specific sensor values of outdoor and indoor units for maintenance and service support.

* Display screen example

* This function is only supported by split units, using the H-Serial communication protocol! Example: ASYH30KMTB



Logo Display

The controller can display hotel logos when not in use. Images are sent via Bluetooth® connection where data is saved in the flash memory built into each controller.

* Color display available




AIRSTAGE Remo Set application (free download)

Set up your new Wired Remote Controller via Bluetooth from your smartphone (or directly at the controller).


Features:

- Initial configuration
- Function setting
- Custom logo import
- Copy settings between controllers

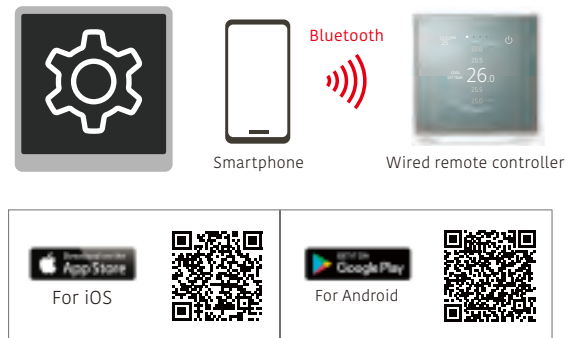

Initial Settings / Indoor Unit Function

The initial controller settings and indoor unit function settings can be sent from a smartphone by pairing with the controller via Bluetooth. It also can read the setting values of a paired controller, and send a copy of them to one or more additional controllers, significantly reducing installation time.

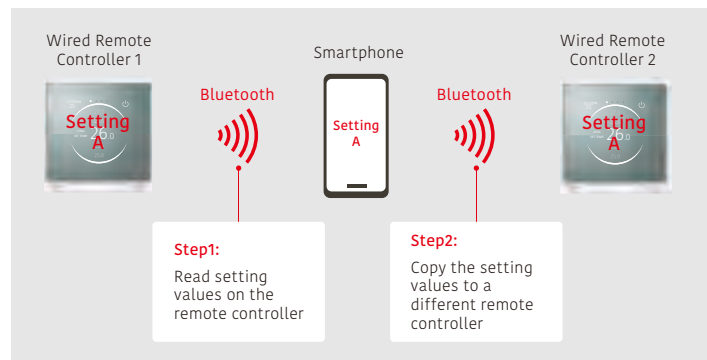

*Smartphone : Wired Remote Controller = 1 : 1

Specifications

Model name	UTY-RVRY
Power Source	DC12V
Dimensions (H × W × D) (mm)	121.5 × 116 × 26
Weight (g)	225

Wired remote controller (with touch panel)

UTY-RNRYZ5



Up to
16 indoor units
Up to
1 group

Easy operation due to large high-resolution STN-LCD touch panel screen

- Touch screen LCD
- Built-in daily/weekly timer (ON/OFF, temperature, modes)
- Backlit screen for easy operation in the dark.
- Room temperature display
- Controls up to 16 indoor units
- Supports 12 languages: Chinese, Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, and Turkish
- Nonpolar 2-core type


High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.



Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately.

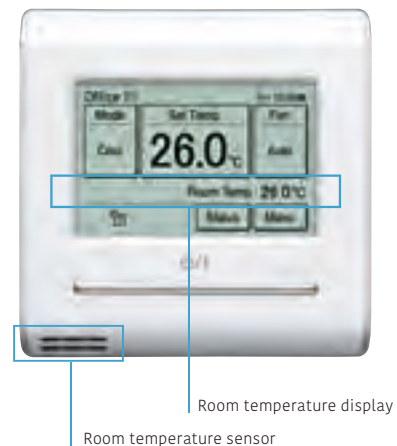

Energy saving controls

Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

* Not available for some models

Auto-off timer



- While the Auto-off timer is activated, if the set off time is specified as, for example, one hour, the power will automatically turn off one hour after the start of operation.
- A desired time frame can be specified for the Auto-off timer.
- The off-time can be set from 30 to 240 minutes.

2-setting weekly timer

Set temperature auto return

Setting temperature range limitation

Cooling set temp. 27°C, Heating set temp. 26°C

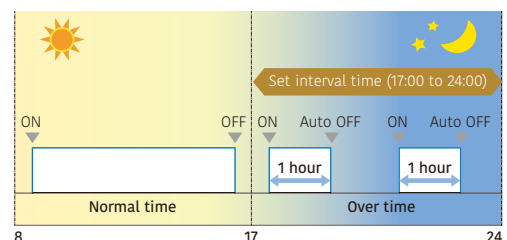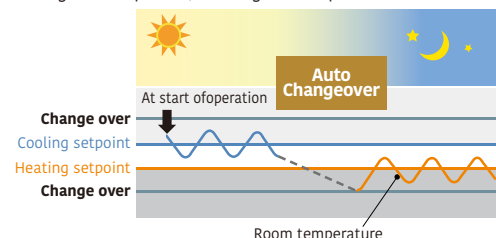

e.g.) Between 17:00 and 24:00 (over time hours), when the 1 hour set off time has elapsed, the system will automatically turn off the indoor unit as it has been judged to be "forgotten to turn off."

Set off time for over time hours: 1 hour

Features: Wired Remote Controller (Touch Panel)

Refrigerant cycle monitor (option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.


* This function is only supported by split units, using the H-Serial communication protocol! Example: ASYH30KMTB



Multi System Control*1


1) Lead Lag Operation

Standby Indoor Unit can be selected in lead lag operation. By this, the Indoor units will last longer than operating by nonstop.

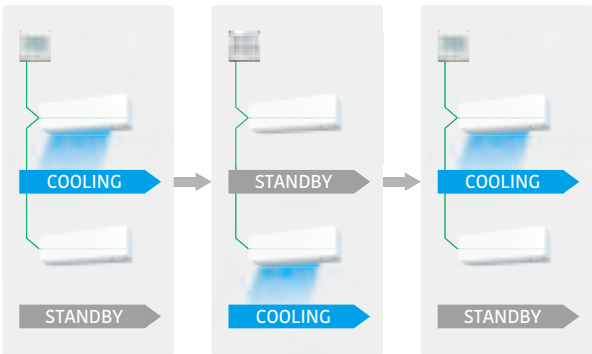


2) Back up operation

In case of unexpected Indoor unit error, other Indoor units will start providing back up operation.

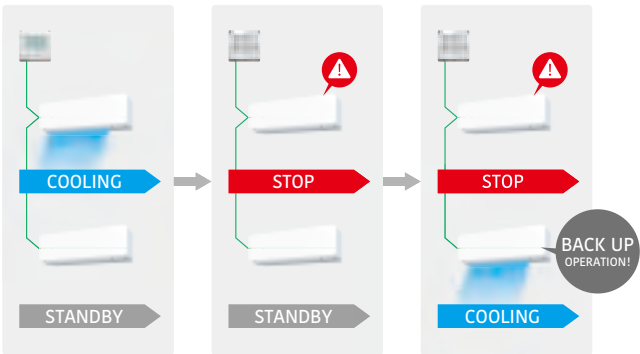

3) Lag Operation

In case of unexpected room temperature rise, other Indoor Units will start providing lag operation.

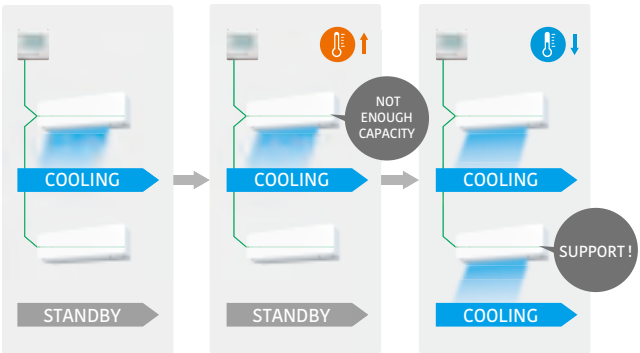

*1: "Lead Lag Setting" is an easy-to-use function for room temperature control when using multiple indoor units, while reducing the burden placed on each indoor unit. If you wish to make use of this function, ensure you use indoor units equipped with a "Special Cooling" function. For Split products with "Special Cooling" function, refer to S-068 to S-071. If you use indoor units that do not have a "Special Cooling" function, under certain conditions, there is a chance that "Backup operation" may not operate correctly, and the "Lead Lag Setting" function will not give the expected results. Additionally, for rooms that require strict conditions, such as server rooms, please consider other appropriate measures. Please note that we will not provide compensation for any damages suffered to your appliances or data as a result of using this function. For more details, please confirm with your nearest retail store.

Specifications

Model name	UTY-RNRYZ5
Power Source	DC 12 V
Dimensions (H × W × D) (mm)	120 × 120 × 20.4
Weight (g)	220

DC 12 V is supplied by the indoor unit.

Wired remote controller

UTY-RLRY



- ON/OFF/Weekly timer settings
- A built-in thermo sensor monitors and controls room temperature accurately.
- When something goes wrong, an error code is displayed.
- 16 error codes from the most recent one will be kept in the history. (Last 16 error codes can be accessed)
- Nonpolar 2-core type

Up to
16 indoor units
Up to
1 group

High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.



Visually intuitive operation

- The operation mode, set temperature, and fan speed are shown prominently on the top screen.
- Each function to be set is indicated by an icon.
- The control guide makes it simple and straightforward to operate a remote controller.




Settings can be displayed more clearly on a large LCD.

Sophisticated control buttons
Simple operation with easy 4-way navigation pad

Compact wired remote controller


UTY-RCRYZ1



- Simple design that matches stylish interiors
- The body of the controller, which is easy to install, is designed to conform to the European standard junction box.
- Can be operated both by wireless and wired remote controller.
- Nonpolar 2-core type

Large screen and simple display


- Large screen but compact size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.

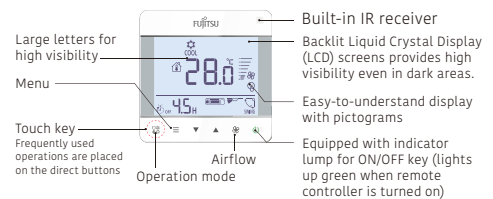


Up to
1 indoor units
Up to
1 group

System overview

VRF connection

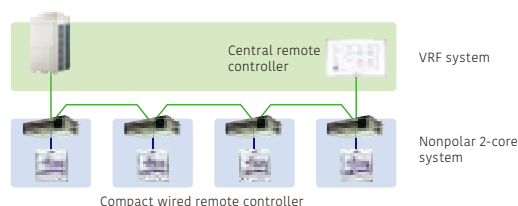

RAC connection



Specifications

Model name	UTY-RLRY	UTY-RCRYZ1
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 17	86 × 86 × 44
Weight (g)	170	135

12 V DC supplied by an indoor unit

Wired remote controller

UTY-RVNYM



Up to
16 indoor units
Up to
1 group

Hi-grade individual control with a wide range of functions.

- 3.7-inch backlit LCD screen.
- Supports energy-saving functions with simple operation.
- Supports 9 languages:
English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish

Visually intuitive operation


- Each function is displayed as an icon.
- Main functions are indicated by large icons: "Mode," "Set Temp," and "Fan"
- Easy operation with control guide display
- Simple operation with easy 4-way navigation pad



Icon display (weekly time)
Set temperature
Control guide display

High performance and compact size

- A single remote controller controls each connected indoor unit and provides a variety of energy-saving options.



Wired remote controller

UTY-RNNYM




Up to
16 indoor units
Up to
1 group

- Simple operation with Built-in Weekly/Daily Timer.
- Control up to 16 indoor units.
- Up to 2 Wired remote controllers can be connected to a single indoor unit.

Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately. The wired remote controller and an optional Remote sensor can be installed in any location to meet any requirement.

Examples of sensor changes

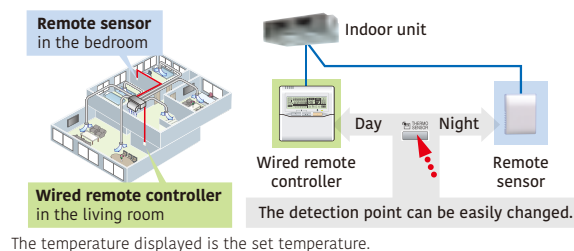

Built-in timer

Weekly timer: ON/OFF time can be set to operate twice for each day of the week.

Temperature setback timer: Sets the time to change the temperature setting and the time to hold the setting for each day of the week.

At "Weekly timer" + "Temperature setback timer" setup

Specifications

Model name	UTY-RVNYM	UTY-RNNYM
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3	120 × 120 × 18
Weight (g)	220	160

12 V DC supplied by an indoor unit

Simple remote controller

UTY-RSRY / UTY-RHRY (without operation mode)



UTY-RSRY



UTY-RHRY
(Without
operation mode)

Compact remote controller with basic functionality

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Simple design that matches stylish interiors
- Large LCD screen and easy-to-use control buttons
- Backlight: White backlight makes it easy to operate in the dark.
- Nonpolar 2-core type


Up to
16 indoor units
Up to
1 group

Supports a variety of applications


- **Vertical louver control:** Adjusts the vertical airflow direction of a duct-type indoor unit with an auto louver or a cassette type installed in a hotel room or a conference room.



- **Setting temperature range limitation:** Enables an indoor unit to operate in an energy-saving manner in a small building not equipped with a central remote controller.

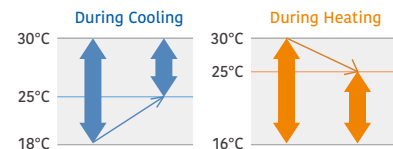

- **Built-in room temperature sensor:** Monitors and controls room temperature accuracy.

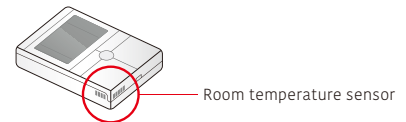

Room temperature sensor

Specifications

Model name	UTY-RSRY	UTY-RHRY
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 75 × 19.4	120 × 75 × 19.4
Weight (g)	120	120

12 V DC supplied by an indoor unit

Wireless remote controller

UTY-LNTY



Simple and versatile operations with a choice of
4 different types of timers

Built-in timer

4 timer programs: ON/OFF/Program/Sleep
Program timer: Sets ON/OFF time once for every 24 hours.
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

Easy installation and operation

Different codes can be assigned to up to 4 indoor units to prevent a mix-up.
Wide and precise transmitting range

Up to
16 indoor units
Up to
1 group
Up to
4 different daily timers

Wireless remote controller

UTY-LNWX




NEW



Simple and comfort controll

Setting temperature range limitation

Enables an indoor unit to operate in an energy-saving manner in a small building not equipped with a central remote controller.

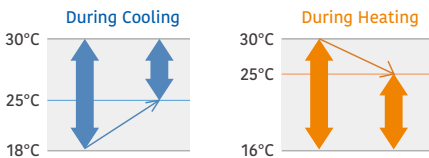

Precise control

The setting temperature can be adjusted precisely depending on the environment as the controller can set the temperature via 0.5°C*.

*Depends on the indoor unit



Specifications


Model name	UTY-LNTY	UTY-LNWX
Power source	3.0V (1.5V R03/LR03/AAA x 2)	3.0V (1.5V R03/LR03/AAA x 2)
Dimensions (H × W × D) (mm)	205 × 61 × 17	162 × 45 × 19
Weight (g)	125	66

12 V DC supplied by an indoor unit



Wireless remote controller

UTY-LNVY



Up to
16 indoor units

Up to
1 group

Up to
4 different daily timers

Stylish design with backlight

- It has adopted a simple and stylish design.
- The built-in backlight allows the screen to be seen even in dark rooms.

Built-in timer

4 timer programs: ON/OFF/Program/Sleep

Program timer: Sets ON/OFF time once for every 24 hours.

Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

Error diagnosis

It can detect the reason for system errors easily.

When an error is detected, the error code number can be checked using the remote controller display.

Precise control

The setting temperature can be adjusted precisely depending on the environment as the controller can set the temperature via 0.5 °C*.

*Depends on the indoor unit

Wireless remote controller

UTY-LNHY



Up to
16 indoor units

Up to
1 group

Up to
4 different daily timers

Simple and versatile operations with a choice of 4 different types of timers

Built-in timer

4 timer programs: ON/OFF/Program/Sleep

Program timer: Sets ON/OFF time once for every 24 hours.

Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

Easy installation and operation

Different codes can be assigned to up to 4 indoor units to prevent a mix-up.

Wide and precise transmitting range


Specifications

Model name	UTY-LNVY	UTY-LNHY
Battery	3.0V (1.5V R03/LR03/AAA x 2)	3.0V (1.5V R03/LR03/AAA x 2)
Dimensions (H × W × D) (mm)	181 × 58 × 17	170 × 56 × 19
Weight (g)	116	85

12 V DC supplied by an indoor unit

IR receiver unit for duct type


UTY-LRHYM / UTY-LBTYM

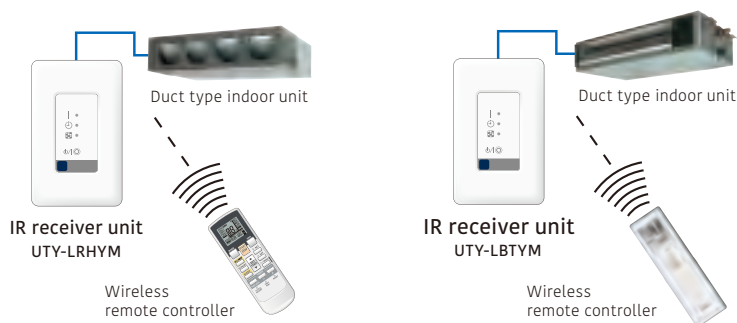

The wireless remote controller controls duct type indoor units.

IR receiver unit for Cassette


UTY-LBTYC

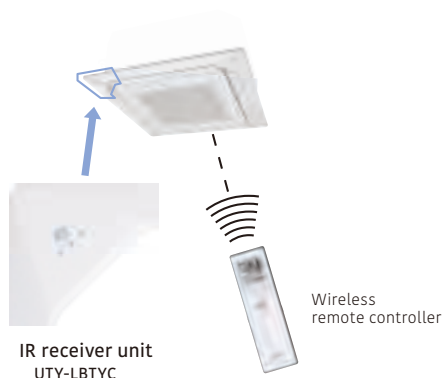

Cassette type indoor unit can be controlled with a Wireless remote controller.

IR receiver unit for ceiling type

UTY-LBTYH

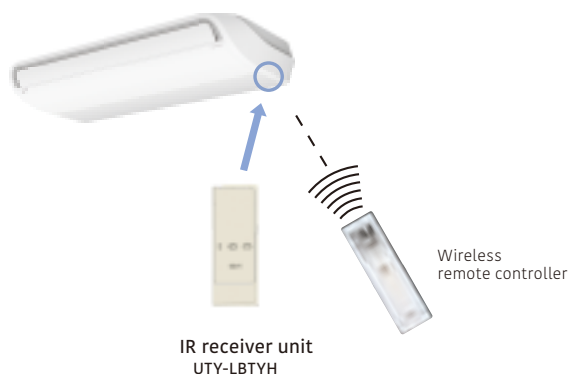

The wireless remote controller controls ceiling type indoor units.

Specifications

< Wireless Remote Controller >

Model name	UTY-LRHYM	UTY-LBTYM	UTY-LBTYC	UTY-LBTYH
Battery	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)
Dimensions (H × W × D) (mm)	170 × 56 × 19	205 × 61 × 17	205 × 61 × 17	205 × 61 × 17
Weight (g)	85	125	125	125

< IR Reciver Unit>

Battery	DC5V	DC5V	DC5V	DC5V
Dimensions (H × W × D) (mm)	145 × 90 × 30	145 × 90 × 30	—*	—*
Weight (g)	150	150	140	100

DC 5 V is supplied the indoor unit.

*It will replace the parts of the indoor unit to be connected.

IR receiver unit for duct type

UTB-YWC / UTY-TRHX



The wireless remote controller controls duct type* indoor units.

*Large airflow duct types do not work with this IR receiver unit.




*A separate wireless remote control (model: UTY-LNHY) is required.

IR receiver unit for cassette

UTY-LBHxD / UTY-TRHX



Cassette type indoor unit can be controlled with a Wireless remote controller.

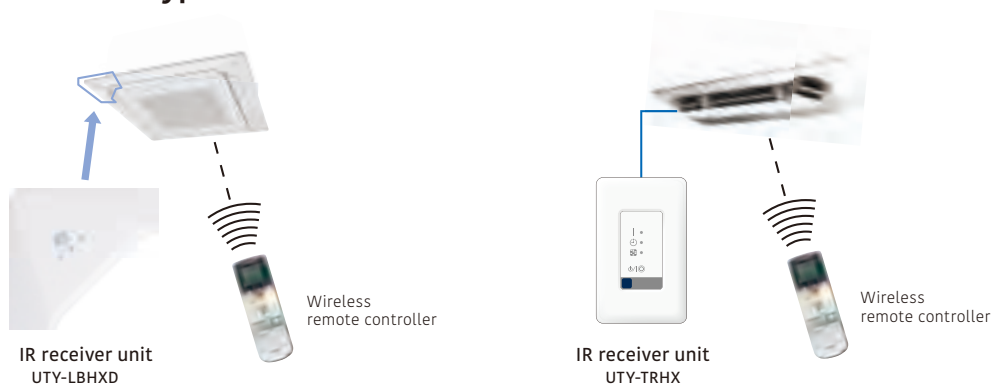

*A separate wireless remote control (model: UTY-LNVY or UTY-LNHY) is required.

Specifications

< Wireless Remote Controller >

Model name	UTB-YWC	UTY-LBHxD	UTY-TRHX
Battery	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)
Dimensions (H × W × D) (mm)	170 × 56 × 19	170 × 56 × 19	170 × 56 × 19
Weight (g)	85	85	85

< IR Receiver Unit >

Battery	DC5V	DC5V	DC5V
Dimensions (H × W × D) (mm)	145 × 90 × 30	-*	145 × 90 × 30
Weight (g)	150	140	150

DC 5 V is supplied the indoor unit.

*It will replace the parts of the indoor unit to be connected.



WLAN adapter

UTY-TFSXH3 / UTY-TFSXJ3



USB type for single split models
UTY-TFSXH3



UTY-TFSXJ3
(CN connector type)


Up to
1 indoor unit



AIRSTAGE Mobile

“AIRSTAGE Mobile” is an application software that enables you to manage the Fujitsu General’s air conditioner(s) with a mobile device from anywhere.

- Maximum 5 accounts per 1 indoor unit
- Room / Outdoor temperature display
- Can be used for a Single / Multi and VRF indoor units.
- No separate external power supply required

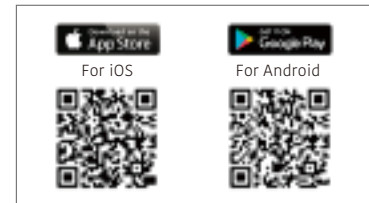

User Friendly for Everyone

Enjoy easy-to-use centralized operation of air conditioners via a smartphone anytime, anywhere




Image*



House Owner



Shop Owner



Commercial
Building Owner

Main Functions


- ON / OFF
- Operation mode
- Fan speed
- Louver position
- Set temperature control
- Weekly timer
- Room temperature display
- Outdoor temperature display
- Error display

*Contents of display differ depending on the type of indoor unit.

New Design!

Ease of use is pursued to achieve a stylish design.

The more legible and accessible timer UI enables effortless schedule management.



Mode change



Fan speed change




Weekly timer



Centralized operation for flexible remote management of all air conditioners

AIRSTAGE Mobile is ideal for a wide range of applications, from large residential buildings to smaller commercial spaces such as offices and stores. Anyone who has a smartphone and an adapter can access to manage the system at a low cost.

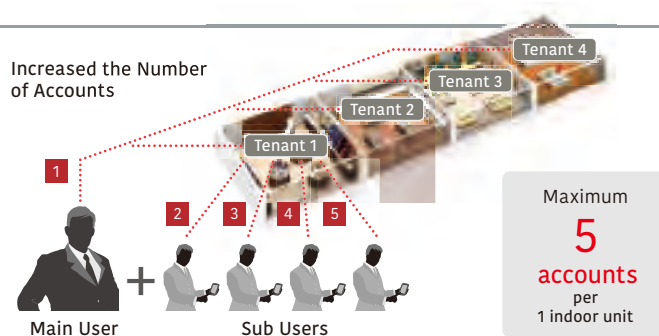


Hierarchical group management

Multiple air conditioners can be combined into a single group for centralized operation. Several groups can also be organized at once. Grouping the air conditioners by building, floor, or room makes it easy for users to monitor their operation status and operate them quickly.



Operate air conditioner and check its operation status just by talking to it

Connecting with a smart speaker allows the user to operate the air conditioner and check its operation status just by talking to it.

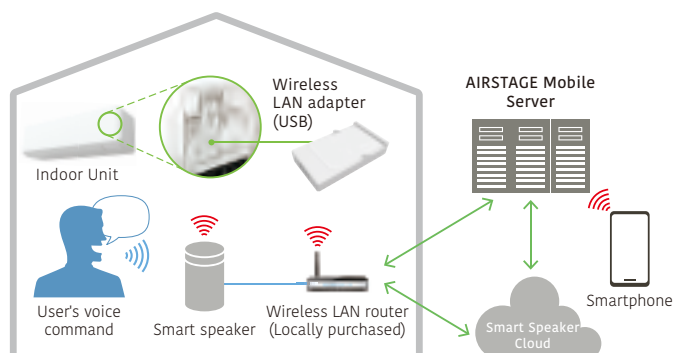

Specifications

Model name	UTY-TFSXJ3(CN connector type)	UTY-TFSXH3
Dimensions (H × W × D) (mm)	71 × 38 × 15	56.7 × 34 × 9.72
Weight (g)	35	30

WLAN adapter

FG-RC-WIF1Z2 / FG-IR-WIF1Z1 / FG-AC-WIF1Z1



Intesis
BY THE POWER OF INTELLIGENCE



FG-RC-WIF1Z2
(3-wire RC-line type)

Intesis
BY THE POWER OF INTELLIGENCE



FG-AC-WIF1Z1
(CN connector type)

Intesis
BY THE POWER OF INTELLIGENCE



FG-IR-WIF1Z1
(IR type)

Up to


1 indoor unit

AC Cloud Control


- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required

Installation example


[3-wire RC-line type/CN connector type]

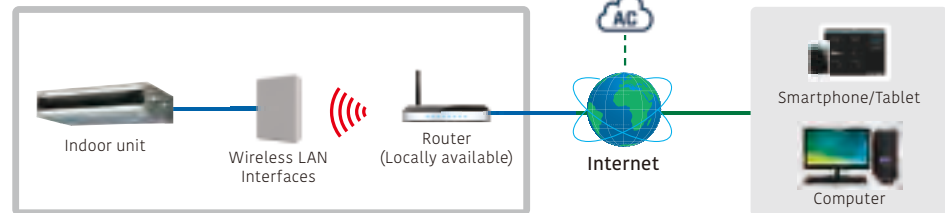

[IR type] Connection to wall-mounted type

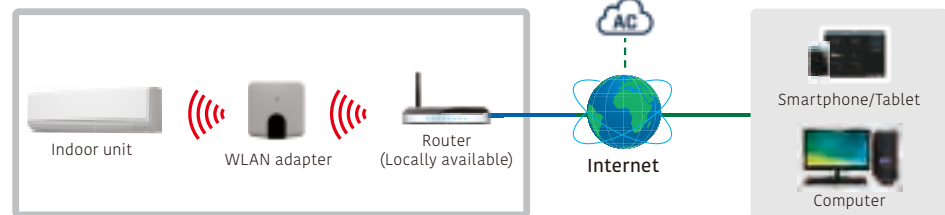

[IR type] Connects to the product with the optional receiver kit

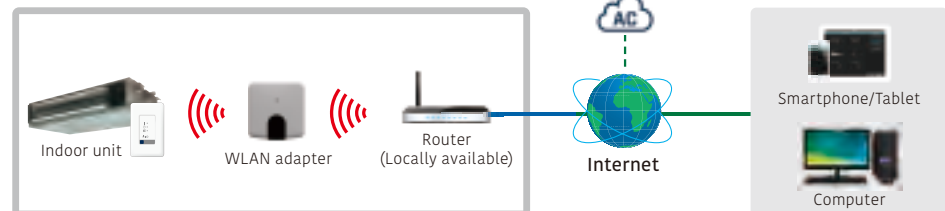

*IR receiver required.

Basic control

- Turning air conditioner on and off
- Mode select (Heat, Cool, Dry, Auto, Fan)
- Louver position (airflow direction setting)
- Fan speed control
- Room temperature display
- Setting temperature
- Multiple language support
- One single scene is created.

Advanced control (optional functions)

- Climate-based operation modes (ECO, Comfort, and Powerful) (to be available in the future)
- Schedule functions (ON/OFF, modes, set temperature, fan speed, louver position)
- Setting temperature range limitation
- Multiple Scenes and Calendars are created.
- Smart Speaker compatibility
- Advanced internet service connections

Notification and operation history

- E-mail notification alerts
- Air conditioning malfunction alert
- Connectivity monitoring and alert
- Operation history (to be available in the future)

Specifications

Model name	FG-RC-WIF1Z2 (3-wire RC-line type)	FG-AC-WIF1Z1 (CN connector type)	FG-IR-WIF1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	108 × 70 × 28	81 × 78 × 28	127 × 50 × 17
Weight (g)	80	76	80

Multiple protocol WLAN adapter

FG-RC-WMP1Z1 / FG-IR-WMP1Z1 / FG-AC-WMP1Z1



Intesis
BY THE WAY WE THINK



FG-RC-WMP1Z1
(3-wire RC-line type)

Intesis
BY THE WAY WE THINK



FG-AC-WMP1Z1
(CN connector type)

Intesis
BY THE WAY WE THINK



FG-IR-WMP1Z1
(IR type)

Up to


1 indoor unit

AC Cloud Control


- Air conditioner control of Home Automation systems via wireless LAN connection.
- No separate external power supply required

Installation example

[3-wire RC-line type/CN connector type]

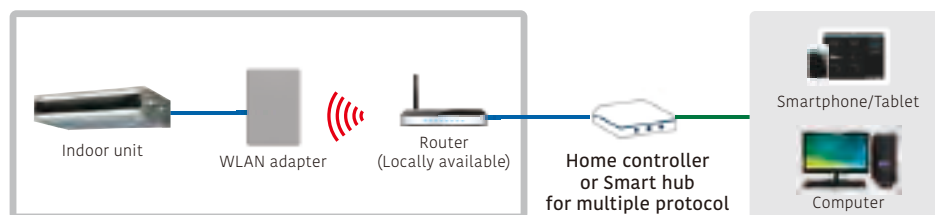

[IR type]

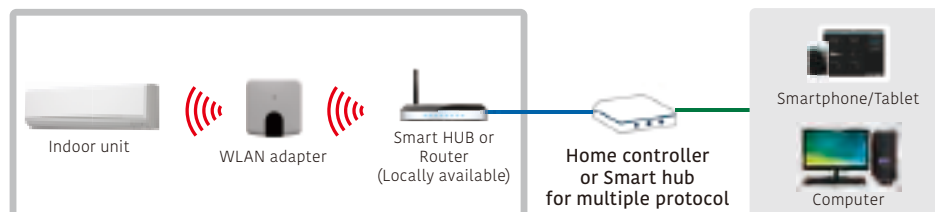

*IR receiver required for other than wall-mounted type.

Specifications

Model name	FG-RC-WMP1Z1 (3-wire RC-line type)	FG-AC-WMP1Z1 (CN connector type)	FG-IR-WMP1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	70 × 100 × 28	127 × 50 × 17	81 × 78 × 28
Weight (g)	98	80	76

Multiple protocol LAN adapter

FG-TL-BMKM16Z1



Intesis
BY THE WAY WE THINK




FG-TL-BMKM16Z1
(VRF type)

Up to

16 indoor units

Installation example

[VRF type]

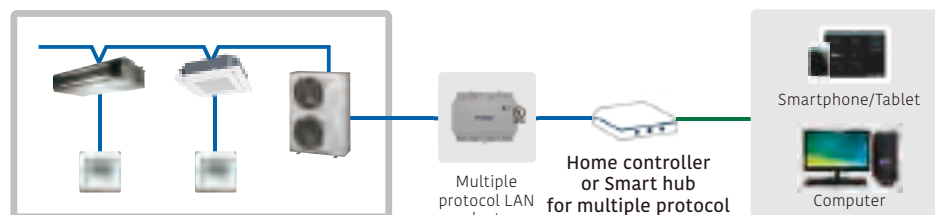

*No separate external power supply required

Specifications

Model name	FG-TL-BMKM16Z1 (VRF type)
Power supply	12 to 36 VDC, Max: 250 mA or 24 VAC 50-60 Hz, Max: 127 mA*
Dimensions (H × W × D) (mm)	90 × 106 × 58
Weight (g)	375

*24 V DC power supply is recommended.

Home central remote controller

UTY-DMMYM / UTY-DMMYM1



Up to

1 multi-split system


Up to

6 indoor units

For 5-unit and 6-unit multi-split type

- Batched control of up to 6 indoor units For all indoor units connected to the remote controllers, the Home central remote controller sets room temperature, airflow volume, and remote controller prohibition from other remote controllers at once.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish.
- Large backlit LED screen
- Large, easy-to-see operation panel

Example of system configuration

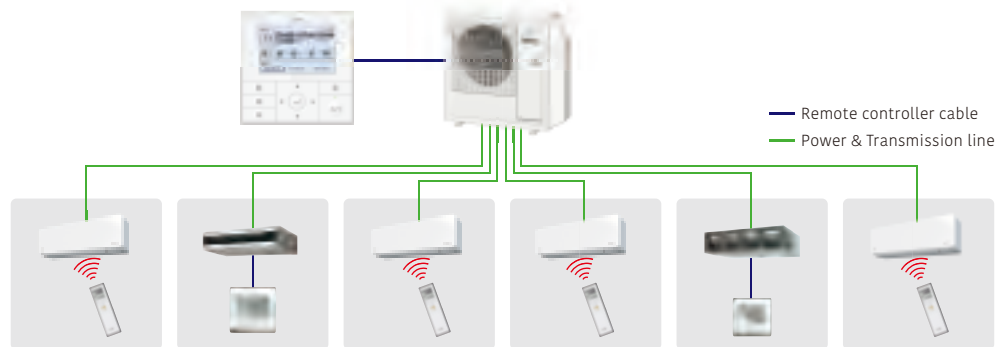

Home central remote controller

Weekly timer

Up to 4 ON/OFF settings can be programmed per day. Two weekly patterns can be set, one for the cooling season and the other for the heating season.

Low noise operation

You can choose from 4 low noise levels depending on the installation environment. ON/OFF timing of low noise mode can be set with the timer.

10 °C heat operation

When you leave the house, the air conditioner runs a minimum heating operation to maintain the room temperature at 10°C.



*Consult your dealer for conditions of use.

Economy operation

When you select energy-saving economy mode, the temperature setting for the indoor unit increases (during cooling operation) or decreases (during heating operation) by 1°C and the maximum electric value of the outdoor unit is suppressed.

Prohibiting local control, including settings such as child lock

The Home central remote controller is equipped with a lock function to prevent unauthorized operation from the remote controllers of the indoor unit in each room. The Home central remote controller is equipped with a child lock to prevent children from accidentally turning the air conditioner on or off or changing its settings.

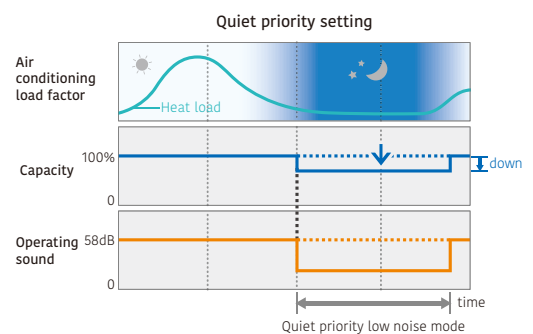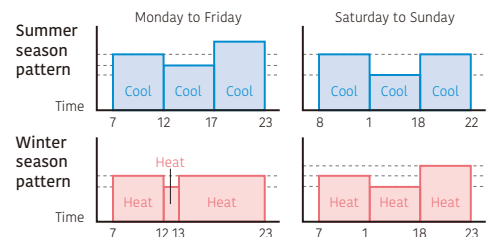

Specifications

Model name	UTY-DMMYM/UTY-DMMYM1
Power source	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3
Weight (g)	220

12 V DC supplied by an indoor unit



Central remote controller

UTY-DCGYZ3



Up to
100 indoor units

Up to
50 groups


For tenants in small to midsize commercial premises

- Individual control and monitoring of up to 100 indoor units
- 7.0inch TFT color screen
- Visually intuitive operation
- Room temperature display by indoor unit sensor & remote controller sensor
- 50 Remote Controller Groups Display & remote controller group rename
- Supports 14 languages: Chinese (Simplified/Traditional), Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, Turkish, and Thai (Remote Management only)

Easy operation

Air conditioning management by detecting room temperatures of each room

The room temperature detected with indoor unit sensor or remote controller sensor can be displayed. New model can detect the room temperature by indoor units sensors even if wired remote controllers are not connected to the indoor units.

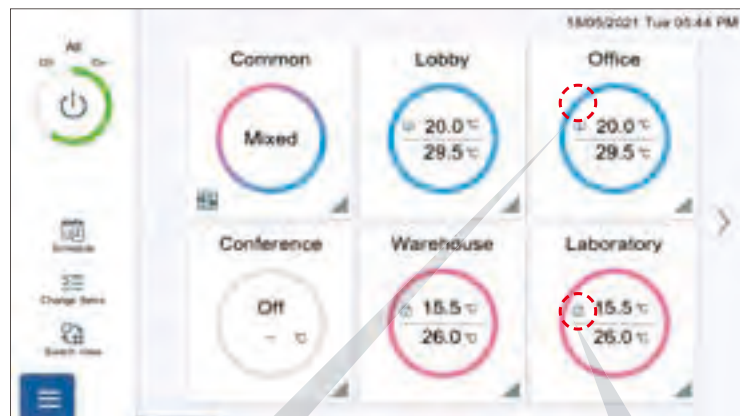


Not connected wired remote controller



*Room temperature is displayed only when indoor unit operates.

Connected wired remote controller

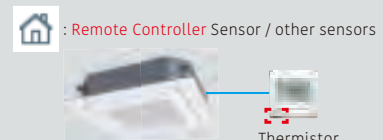

50 Remote Controller Groups Display


The group display and the 50 remote controller groups display can be switched easily. Users can choose which display is better, depending on the situation.

Group Display



Manage & Monitor
by each Groups

50 Remote Controller Groups Display

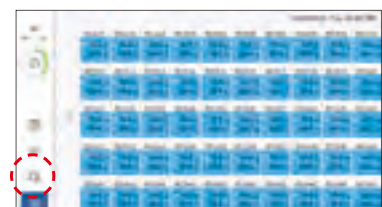


Manage & Monitor
by 50 Remote Controller Groups




Remote Controller Groups Rename

The remote controller group names can be changed. Users can know easily where the air conditioning is located by changing the remote controller group names.



Features: Central Remote Controller

- Easy intuitive operation from the touch panel display.
- All functions can be accessed through the monitoring screen showing a pop-up window for detailed operation.

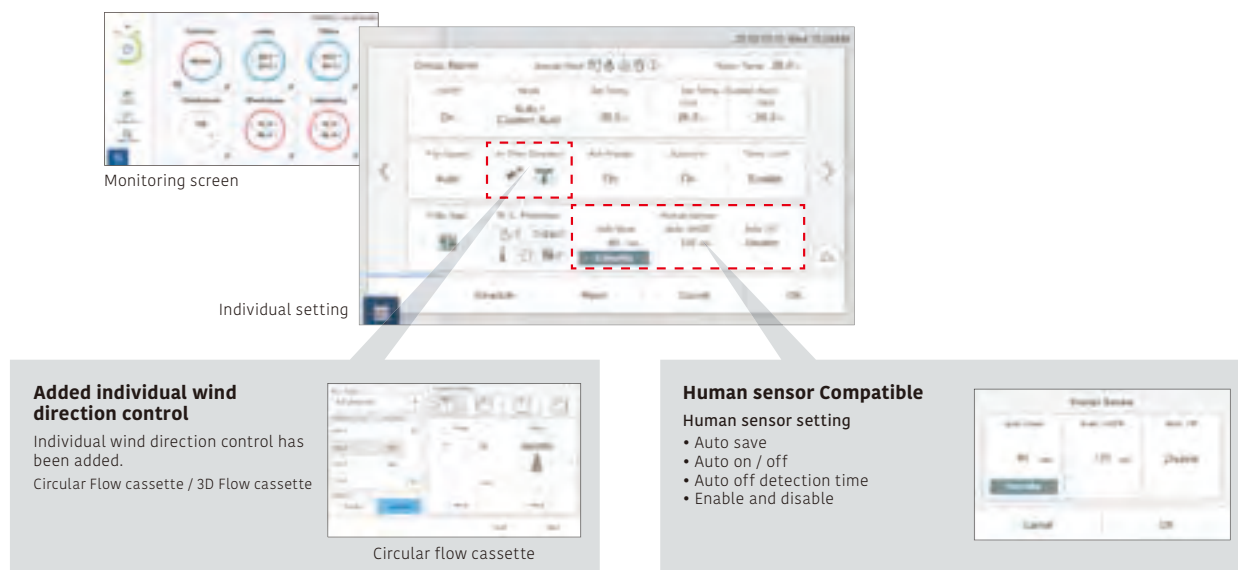

Remote Management

Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere.

When the central remote controller manages the indoor units of some tenants, air conditioning of each tenant can be managed separately online.

Increased the Number of Accounts



Trouble support function

Display error details

Display descriptive explanation when an error occurs



Sensor value monitoring function

Monitor sensor data of indoor unit / outdoor unit, send mail

Notify room temperature by email*


Notify by e-mail when the temperature around the air conditioner is too high or too low

*:This function is available only when using wired remote controller.

Schedule management

Annual schedule

- An annual schedule can be arranged for each remote controller group or user-defined group.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.

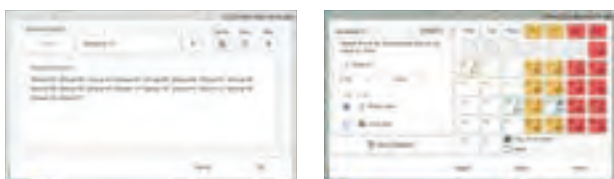

low noise schedule

Low noise operation of outdoor units can be scheduled.



Automatic return to set temperature

A function that automatically returns the changed temperature to its original value over time.

Specifications

Model name	UTY-DCGYZ3
Power Supply	100-240 V 50/60 Hz
Dimensions (H × W × D) (mm)	134.6 × 216.2 × 37.9
Weight (g)	800



Touch panel controller

UTY-DTGYZ1



- Large 7.5-inch TFT color LCD screen
- Touch screen operation
- Stylish design to fit nicely into any room environment
- Controls up to 400 indoor units.
- Icon or list view can be selected in monitoring mode.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.
- Mounted with LAN adapter for remote control & operation, external input/output with emergency stop and batch ON/OFF

Up to
400 indoor units

Up to
100 outdoor units

Up to
400 groups

Easy operation

- Wide range of simple-to-understand icons
- Operate by pressing the icons on the screen with your finger or a stylus.
- The color on the back identifies the current control operation; blue is for monitoring and green is for operational control.



Easy maintenance

- The flat touch panel can be easily cleaned.
- Touch panel controller with non-glare coating to prevent finger marks
- Front cover for easy removal.




Easy installation

- The touch panel controller can be mounted on a wall.
- Flat back surface enables easy installation anywhere on a wall.
- No additional parts or components required for installation




Controls up to 400 indoor units.

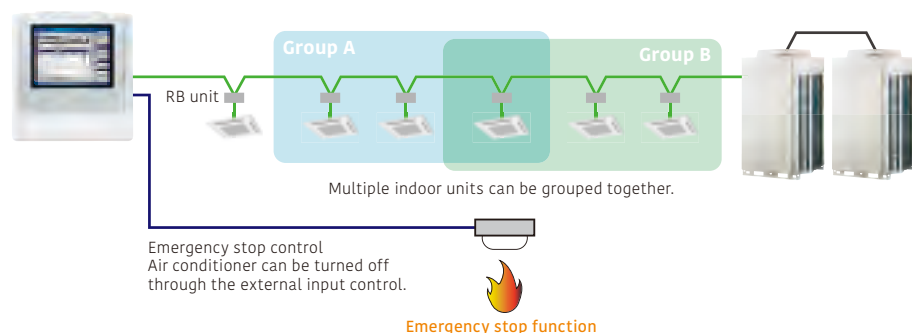

Features:

Control & monitoring

- Control and monitor Fujitsu General air conditioners via LAN or internet.
- Users and tenants can manage their assigned equipment from anywhere by computer or tablet.
- When something goes wrong, an error notice is sent by e-mail for prompt troubleshooting.

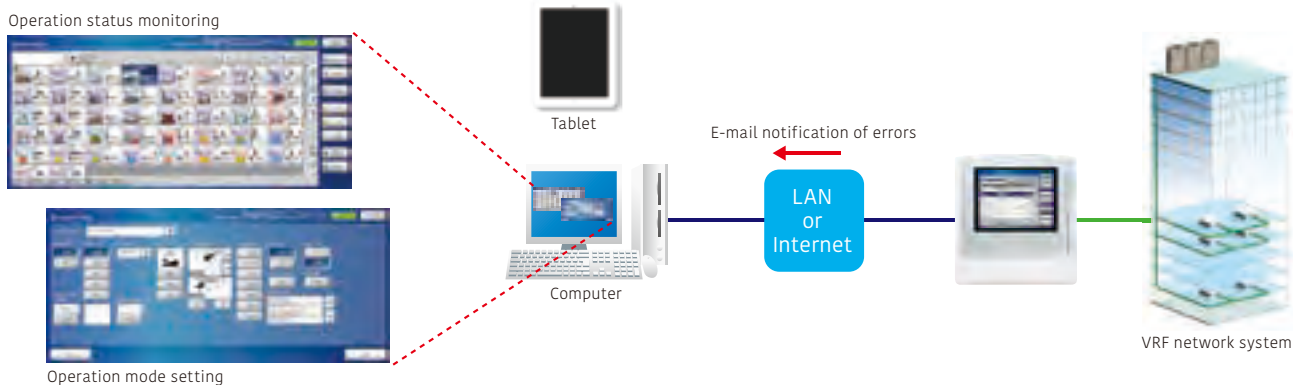

Smartphone


Model name	Browser
Nexus 6P (Android 7.1.1)	Google Chrome 5.5
iPhone 7 (iOS 10.1)	Safari 10

Tablet

Model name	Browser
iPad Pro 9.7 inch (iOS 10.2.1)	Safari 10

Flexible access permissions can be granted to users at each point level.

The administrator can register multiple users and permit them to access any indoor unit and any functions.

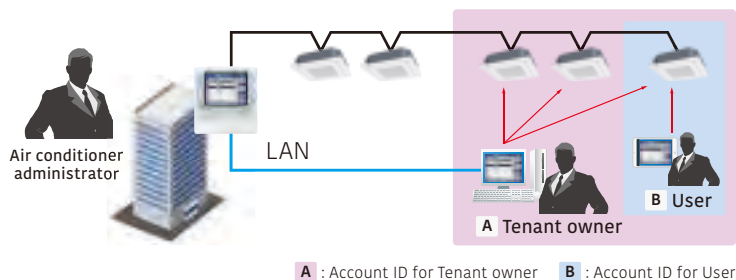


Additional languages

Supports 7 languages as standard: Chinese, English, French, German, Polish, Russian, and Spanish.

Create a language database to integrate additional languages into the remote device.


The added languages will only be displayed on the remote device and cannot be added to the Touch panel controller.

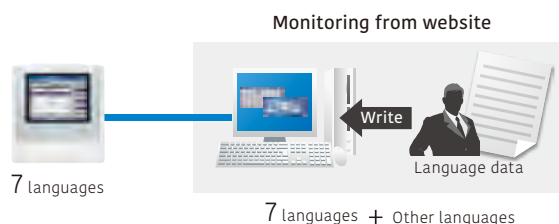

Electricity charge apportionment (Option: UTY-PTGXA)

- Energy cost can be calculated and allocated to each billing user in proportion to the amount of energy used for air conditioning.

- Apportionment charge/bill calculation
- Tenant (block) setting
- Common facilities apportionment setting
- Rated power consumption allotment
- Individual calculations for cooling and heating
- Electricity meter supported

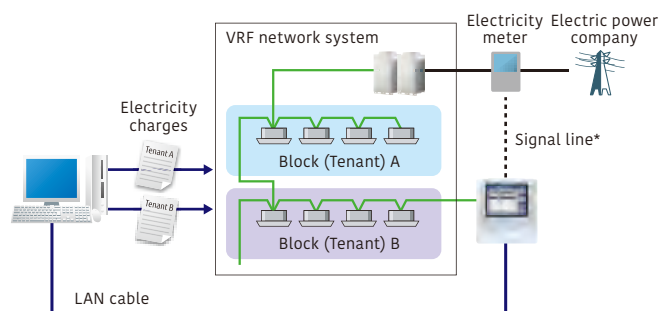


* An electricity usage meter can be connected to an external input connector of the Touch panel controller. In that case, the meter cannot be connected to an outdoor unit at the same time.

Features:**Automatic setting for daylight saving time****Functions provided**



- 1) Schedule setting for daylight saving time
 - It prevents the user from forgetting to set daylight saving time. In addition, it saves time and effort for the user.

Automatic clock adjustment


- 2) Time can be set for all controllers in a batch automatically.

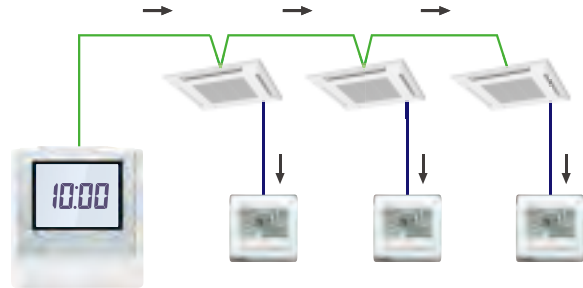**Outdoor unit low noise operation**


You can choose from 4 low noise levels depending on the installation environment.
ON/OFF timing of low noise mode can be set with the timer.

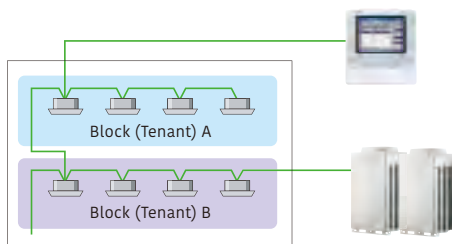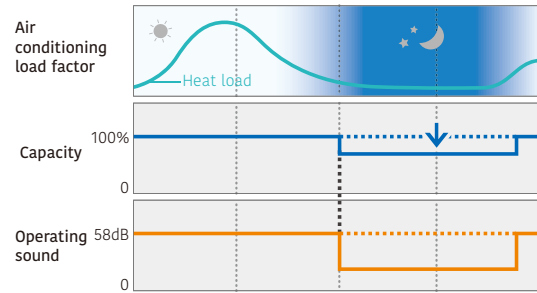**Quiet priority setting****Energy-saving controls****Custom Auto**

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.
- * Not available for some models

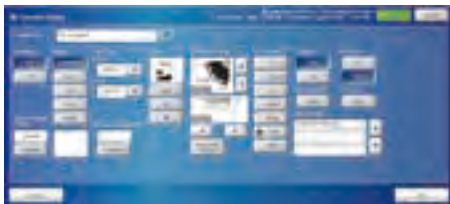

Cooling set temp. 28°C, Heating set temp. 18°C

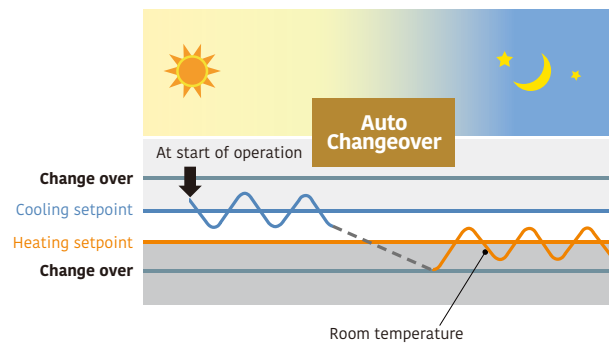**Refrigerant leak detector**

Refrigerant leakage status is indicated by the management equipment. A pop-up message is displayed to notify the user, and the refrigerant is shut off.



Pop-up highlighting

FUNCTIONS SUMMARY

		
	UTY-DTGYZ1	Monitoring side
Air conditioning control functions		
ON/OFF	●	●
Operation mode setting*	●	●
Fan speed control	●	●
Room temperature setting	●	●
Setting temperature range limitation	●	●
Test operation	●	●
Vertical louver setting	●	●
Horizontal louver setting	●	●
Individual louver control	●*1	●
Group setting	●	●
Remote controller prohibition	●	●
Anti-freeze setting	●	●
Set temperature auto return	—	●
Energy-saving controls	—	●
Economy mode setting	●	●
Human sensor control	—	●
Displayed items		
Error	●	●
Defrosting	●	●
Current time	●	●
Day of week	●	●
Remote controller prohibition	●	●
Cooling/heating priority	●	●
Address display	●	●
Room temperature	●*3	●*3
Multiple language support	●	●
Setting for daylight saving time	●	●
Time zone setting	●	●
Name registration	●	●
Backlighting	●	●
Language setting	7	7+other
Filter sign reset	●	●
Memory operations	●	●
Refrigerant leak detector	●	●

●: Supported ○: Optional function —: Not supported

*1 Only setting cancellation can be operated.

*2 Only available for external input control.

*3 Available only when using a Wired remote controller.

			
		UTY-DTGYZ1	Monitoring side
Timer			
	Period	Year	Year
Schedule timer	ON/OFF, Temp, Mode, Times per day	20	20
ON/OFF timer		-	-
Sleep timer		-	-
Program timer		-	-
Auto-off timer		—	●
Day off		●	●
Minimum unit of timer setting (minutes)		10	10
Control			
Remote monitoring management system		●	●
Electricity charge apportionment		○	○
Error history		●	●
Emergency stop		●*2	●*2
Remote monitoring management		—	●
Energy-saving management		-	-
E-mail notification in case of failure		—	●
Key lock		● Password setting	-
Low noise mode		●	●

Specifications

Model name	UTY-DTGYZ1
Power supply	Single phase ~100 to 240 V 50/60 Hz
Dimensions (H × W × D) (mm)	260 × 246 × 54
Weight (g)	2,150
Interfaces	Transmission/LAN/USB/EXT IN/EXT OUT/Reset SW

System controller

UTY-APGXZ1 **Software**

Up to

4 VRF network systems

Up to

400 outdoor units

Up to

1,600 indoor units

System controller enables advanced integrated monitoring and control of VRF network systems operating in small to large buildings.

- Up to 1,600 indoor units and 400 outdoor units on up to 4 VRF network systems can be controlled.
- To accommodate facility management needs, the system controller offers—in addition to precise air conditioning control—remote central control, electricity charge apportionment, schedule management, and energy-saving options for VRF network systems.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



System controller lite

UTY-ALGXZ1 **Software**

Up to

1 VRF network system

Up to

100 outdoor units

Up to

400 indoor units

System controller Lite offers a set of standard functions to manage air conditioners operating in a small or midsize building.


- Up to 400 indoor units and 100 outdoor units on a VRF network system can be controlled.
- In addition to precise air conditioning control, a variety of applications are available as options to offer a wider range of control.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



Visually intuitive operation

Click & Operate: The visual representation of the property is shown on the screen from the perspective most suitable for operation (Click & Operate) You can select from among 4 display options: site, building, floor, and list.

Freely define groups for batched control: Indoor units can be grouped for simplified batch control from the tree menu. They can be grouped by organizational hierarchy, such as by division, department, and section.

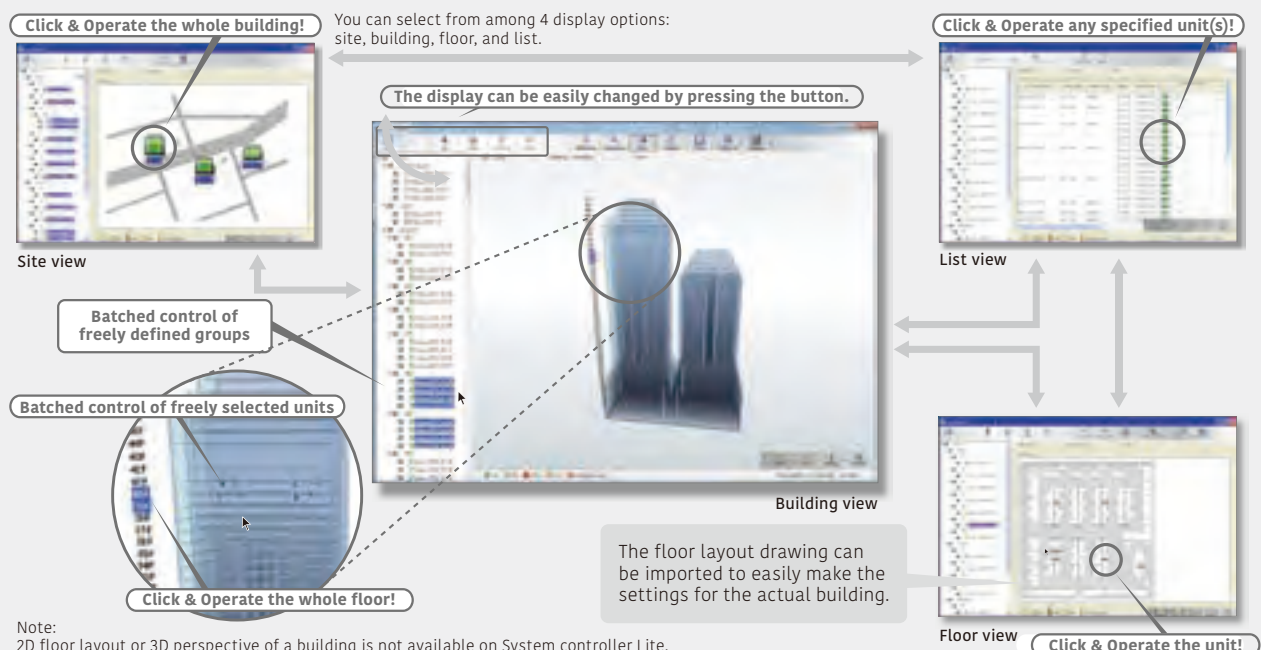


Features:

Third-party devices connected via MODBUS® can be controlled.

Standard for System Controller **Option** for System controller Lite UTY-PLGXX2

When a MODBUS® adapter (locally available) is connected to a computer, electrical equipment and devices supported by MODBUS® can be monitored and controlled centrally from the computer. The central control can reduce wasted energy throughout an entire building resulting from a failure to turn equipment off during or after work, as well as reduce the need for on-site patrols.

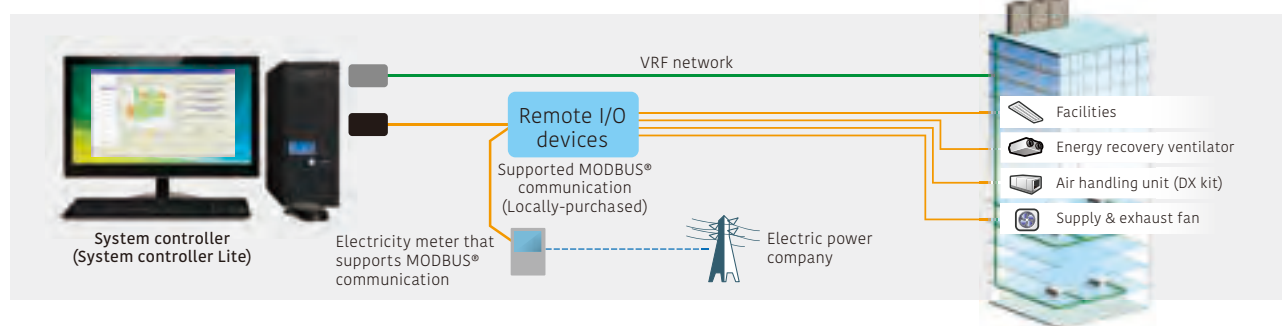

Wide-ranging operation and data management

Standard System controller and System controller Lite

Schedule management

- An annual schedule can be arranged for each remote controller group or user-defined group.
- ON/OFF, operation mode, remote controller prohibition, and temperature settings can be programmed for up to 143 times per day at 10-minute intervals and for up to 101 configurations for each remote controller group.
- Settings can be programmed for a period that spans midnight.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.
- Low noise operation of outdoor units can be scheduled.



Wide-ranging control of indoor and outdoor units

- The operation status and mode of each indoor unit are displayed.
- Turn on and off each indoor unit and switch its operation mode.
- Setting temperature range limitation
- Low noise setting of outdoor units

Remote controller prohibition

Prohibits the operation mode, temperature setting, or ON/OFF of an indoor unit.

Error alert and e-mail notice

When something goes wrong, an error message is shown in a popup on a computer display with a chime, and an e-mail notice is sent. Errors of the past one year are logged and can be reviewed.

Operation and control history

A history of operation status and control can be maintained and retrieved.

Importing and exporting databases

Only an administrator is authorized to import and export registration, layout, and image data.

Automatic clock adjustment

Time can be set for all controllers in batch automatically.


Electricity charge apportionment

Standard on System controller

Option System controller Lite UTY-PLGXA2

Electricity charge apportionment method

This is a method to calculate monthly energy costs to be allocated to each tenant based on the amount of energy used by their air conditioners. The first step is to determine exactly how much energy is consumed by air conditioners in each tenant space. The second step is to divide the total energy charge billed by an electric power company based on the amount of energy used by each tenant to determine the energy cost to be allocated to each of them. (See figure on right) The calculation takes into consideration such factors as the number of unused rooms and nighttime electricity rate, which are shown in detail on an energy cost allocation schedule.

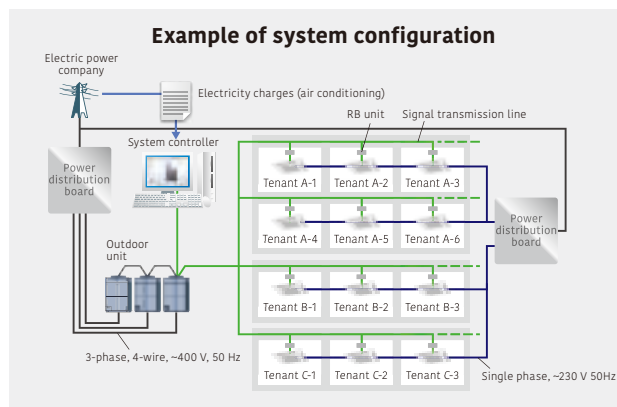

Features:**Remote monitoring management****Standard** on System controller**Option** System controller Lite UTY-PLGXR2

The System controller can be used on site or remotely over networks for remote central control.

The System controller requires 2 software programs working together: The VRF controller runs on site and communicates with the VRF system;



The VRF explorer, which runs at a remote location, provides a user interface and communicates with the VRF controller.

The VRF controller and the VRF explorer run on a single computer or on different computers connected on a network.

A computer running VRF explorer can centrally control up to 10 VRF system sites having up to 20 buildings each.

On site central control

Max. 4 VRF network systems per site

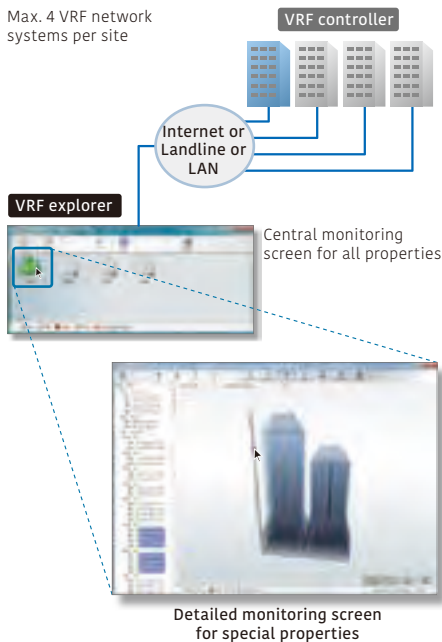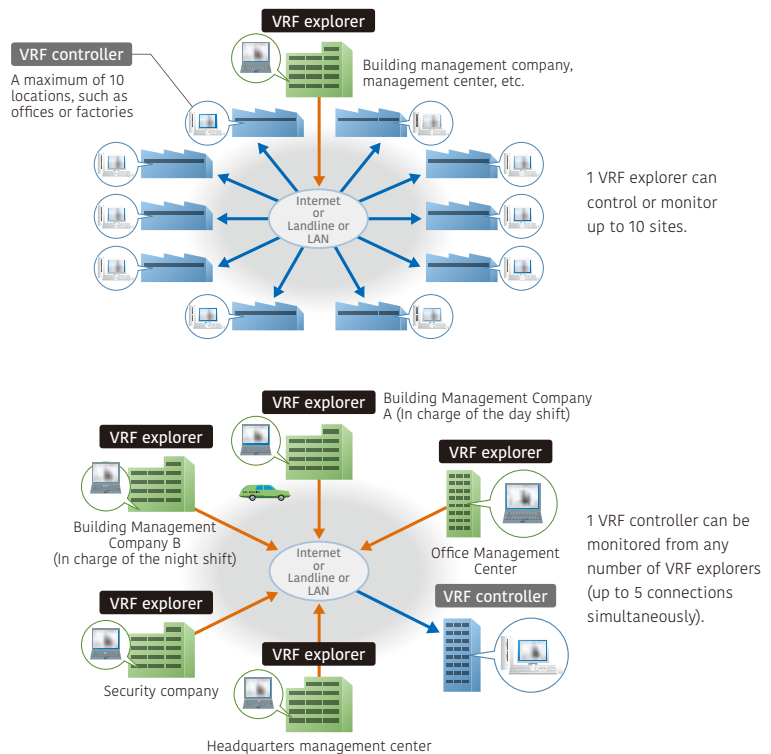**Remote central control****Energy-saving management****Option** System controller UTY-PEGXZ1**Option** System controller Lite UTY-PLGX2

A variety of energy-saving options can be selected depending on the season, weather, and time of day. Excellent energy-saving operation is performed while keeping users comfortable.



Main screen for energy-saving management

Energy saving graph data: This chart compares the energy consumption for the current month with the previous month and with the same month of the previous year to keep track of the energy-saving performance.

Indoor unit rotation

Indoor units can be automatically rotated to operate within a group in accordance with a predetermined annual schedule to reduce power consumption while keeping users comfortable. The operation stoppage rate can be selected for an indoor unit.

Peak-cut mode

The system controller monitors the connected power meter and controls the energy to maintain the target power consumption set for each time period by changing the set temperature of the indoor units or turning off the thermostat so as to keep the users comfortable. Indoor units to be controlled can be grouped in many ways, and the control level can be set for each group.

Capacity saving for outdoor unit

The upper limit on the capacity of an outdoor unit can be adjusted to reduce power consumption during a hot summer or cold winter by averaging out the power-saving performance of each refrigerant system. The upper limit on capacity can be set at 50% of the rated capacity or more.

Summary of functions

Functions	Type	System controller		System controller Lite				
		UTY-APGXZ1	Option UTY-PEGXZ1	UTY-ALGXZ1	Option UTY-PLGXR2	Option UTY-PLGXA2	Option UTY-PLGXE2	Option UTY-PLGXX2
Specifications	Max. number of VRF networks supported	4	—	1	—	—	—	—
	Max. number of indoor unit and remote controller groups per VRF network	400	—	400	—	—	—	—
	Max. number of outdoor units per VRF network	100	—	100	—	—	—	—
	Max. number of indoor units and remote controller groups per System controller	1600	—	400	—	—	—	—
	Max. number of outdoor units per System controller	400	—	100	—	—	—	—
Site supervision	Multiple site display	10	—	10	—	—	—	—
	Number of buildings per site	20	—	—	—	—	—	—
	Number of floors per site	200	—	—	—	—	—	—
	Number of floors per building	50	—	—	—	—	—	—
	3D graphical layout view	●	—	—	—	—	—	—
	2D graphical layout view	●	—	—	—	—	—	—
	List display	●	—	●	—	—	—	—
Error management	Tree display	●	—	●	—	—	—	—
	Group display	●	—	●	—	—	—	—
	Error notification	●	—	●	—	—	—	—
History	Audible alarm	●	—	●	—	—	—	—
	E-mail notification of errors	●	—	●	—	—	—	—
	Error history	●	—	●	—	—	—	—
Operation control	Operation history	●	—	●	—	—	—	—
	Control history	●	—	●	—	—	—	—
	Individual control	ON/OFF	●	—	●	—	—	—
		Operation mode*	●	—	●	—	—	—
		Room temperature	●	—	●	—	—	—
		Fan speed	●	—	●	—	—	—
		Airflow direction	●	—	●	—	—	—
		Economy mode	●	—	●	—	—	—
		Setting temperature range limitation	●	—	●	—	—	—
		Anti-freeze	●	—	●	—	—	—
		Low noise setting of outdoor units	●	—	●	—	—	—
	Individual management	Remote controller prohibition	●	—	●	—	—	—
		Setting temperature range limitation	●	—	●	—	—	—
		Filter sign reset	●	—	●	—	—	—
	Other	memory operations	●	—	●	—	—	—
		Pattern operations	●	—	●	—	—	—
Schedule	Annual Schedule	●	—	●	—	—	—	—
	Setting for a specific date	●	—	●	—	—	—	—
	ON/OFF per day	72	—	72	—	—	—	—
	ON/OFF per week	504	—	504	—	—	—	—
	Day off	●	—	●	—	—	—	—
	Minimum unit of timer setting (minutes)	10	—	10	—	—	—	—
	Weekly schedule for low noise mode	●	—	●	—	—	—	—
Remote monitoring management	Web Operation	●	—	●	—	—	—	—
	Remote monitoring	●	—	—	●	—	—	—
	Remote operation control	●	—	—	●	—	—	—
	Remote function setting	●	—	—	●	—	—	—
Electricity charge apportionment	Apportionment charge/bill calculation	●	—	—	—	●	—	—
	Tenant (block) setting	●	—	—	—	●	—	—
	Common facilities apportionment setting	●	—	—	—	●	—	—
	Rated power consumption allotment	●	—	—	—	●	—	—
	Individual calculations for cooling and heating	—	●	—	—	●	—	—
Energy-saving management	Electricity meter supported	—	●	—	—	●	—	—
	Indoor unit rotation	—	●	—	—	—	●	—
	Peak cut control	—	●	—	—	—	●	—
	Capacity saving for outdoor unit	—	●	—	—	—	●	—
	Record of energy-saving operation	—	●	—	—	—	●	—
	Information on energy saving	—	●	—	—	—	●	—
	Power consumption monitor	—	●	—	—	—	●	—
Control of external devices	Electricity meter supported	—	●	—	—	—	●	—
	Monitor	●	—	—	—	—	—	●
	Control	●	—	—	—	—	—	●
Others	Importing and exporting databases	●	—	●	—	—	—	—
	Automatic clock adjustment	●	—	●	—	—	—	—
	Multiple language support	7 languages	—	7 languages	—	—	—	—
	Refrigerant leak detector	●	—	●	—	—	—	—
	Power shutdown	●	—	●	—	—	—	—

●●: Available - : Not available

Computer requirements

The specifications required for the computer are shown in the table below:

	System controller	System controller Lite
Operating system	• Microsoft Windows 10 Home (64-bit) • Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Home (64-bit) • Microsoft Windows 11 Pro (64-bit) Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish	• Microsoft Windows 10 Home (64-bit) • Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Home (64-bit) • Microsoft Windows 11 Pro (64-bit) Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel Core i3 2 GHz or higher	Intel Core i3 2 GHz or higher
Memory	• 4 GB or more (for Windows 10) • 8 GB or more (for Windows 11)	• 4 GB or more (for Windows 10) • 8 GB or more (for Windows 11)
HDD	40 GB or more of free space	40 GB or more of free space
Displayed items	1,024 × 768 or higher resolution	1,024 × 768 or higher resolution
Interfaces	- Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line) - USB ports (Maximum of 5 ports) (Required only for the server PC that works as VRF controller) - Maximum of 1 USB ports are required for WHITE-USB-KEY connection - Maximum of 4 USB ports are required for Echelon U10 USB/U60-FT DIN Network Interface NOTE: Maximum number of required USB ports depends on the applicable system configuration.	- Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line) - USB ports (Maximum of 2 ports) (Required only for the server PC that works as VRF controller) 1 USB port is required for WHITE-USB-KEY connection 1 USB port is required for Echelon U10 USB/U60-FT DIN Network Interface NOTE: Maximum number of required USB ports depends on the applicable system configuration.
Graphic accelerator	Microsoft DirectX 9.0c compatible	Microsoft DirectX 9.0c compatible
Software	Adobe Reader 9.0 or later	Adobe Reader 9.0 or later

- Transmission adapter (Required for each VRF network):
 - Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)
 - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

Packing list

Type	For System controller		For System controller Lite				
	System controller	Option Energy manager	System controller Lite	Remote access	Option Electricity charge apportionment	Option Energy saving	Option Centralized control
Model name	UTY-APGXZ1	UTY-PEGXZ1	UTY-ALGXZ1	UTY-PLGXR2	UTY-PLGXA2	UTY-PLGXE2	UTY-PLGXX2
White-USB-key	1	1	1	1	1	1	1

*1: Software protection key to be inserted in a USB slot running System controller or System controller Lite.

System controller or System controller Lite may only run on a PC with a WHITE-USB-KEY. However, a WHITE-USB-KEY is not required for remote VRF explorer software.

MODBUS® converter for indoor unit

UTY-VMSX




Up to

1 indoor unit


MODBUS® converter enables air conditioners to be fully integrated into a MODBUS® network.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS® converter must be connected to an indoor unit on a one-to-one basis.
- The MODBUS® converter enables central monitoring and control of air conditioners from BMS, central, or home controller.

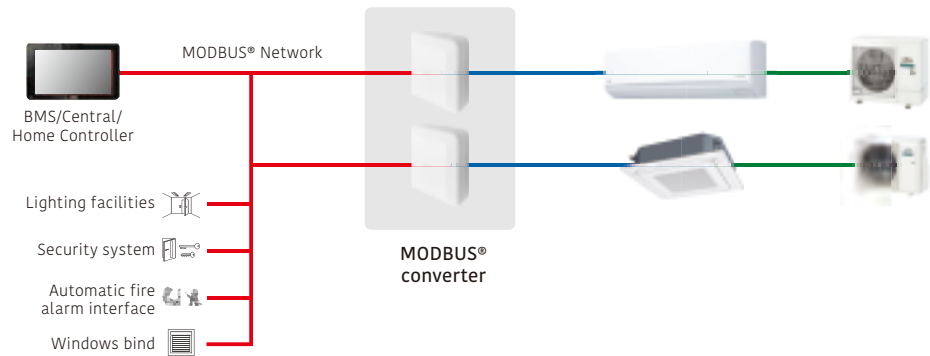

Easy Installation

Easy to install with minimal wiring and without the need for a power supply cable to the converter

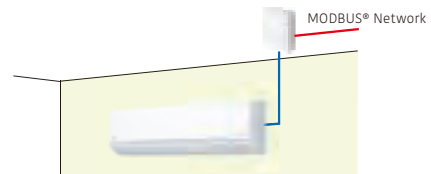

Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Room temperature setting and display
- Economy mode setting
- Error status

Specifications

Model name	UTY-VMSX
Power supply	12 V DC
Input power (W)	Max. 1.2 W
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200
Maximum number of connectable indoor units per MODBUS® converter	1

Modbus communication specifications

Transfer mode	RTU mode
Communication speed	9600/19200 bps
Data bit	8
Parity	even/odd/none
Stop bit	1/2 (no parity)
Network	RS485
Maximum cable length	1000 m (3280 ft)

MODBUS® interface

FG-RC-MBS1Z1 / FG-AC-MBS1Z1 / FG-IR-BMG1Z1



Intesis®



FG-RC-MBS1Z1
(3-wire RC-line type)

Intesis®



FG-AC-MBS1Z1
(CN connector type)

Intesis®



FG-IR-BMG1Z1
(IR type)


Up to

1 indoor unit


MODBUS® interface enables air conditioners to be fully integrated into a MODBUS® network.

- Small, compact, and easy to install on DIN rails.
- No separate external power supply required.
- MODBUS® interface enables central monitoring and control of air conditioners from BMS.

Installation example

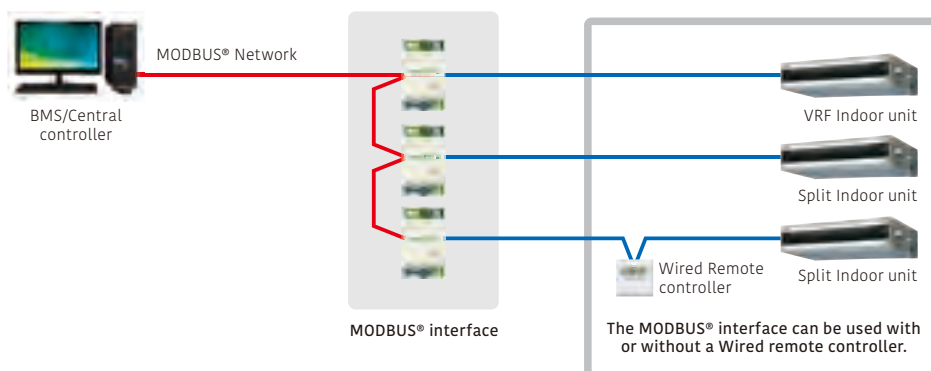

[IR type] Connection to wall-mounted type

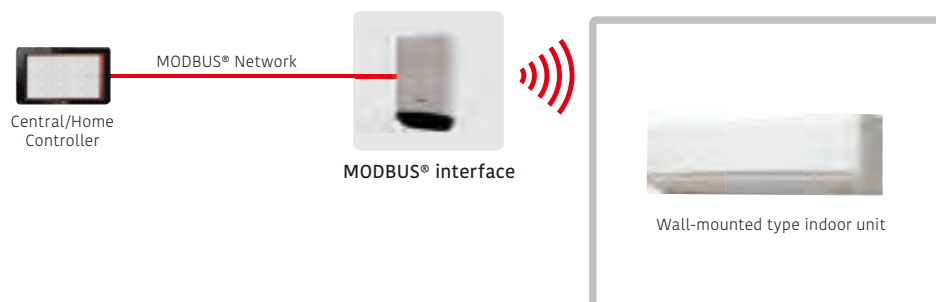


Specifications

Model name	FG-RC-MBS1Z1 (3-wire RC-line type)	FG-AC-MBS1Z1 (CN connector type)	FG-IR-BMG1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58	93 × 60 × 21
Weight (g)	85	85	55

MODBUS® convertor for VRF

UTY-VMGX / FG-TL-BMKM16Z1



UTY-VMGX

Up to

9 units per VRF system

Up to

100 outdoor units

Up to

128 indoor units**MODBUS® convertor enables air conditioners to be fully integrated into a MODBUS® network.**

- Compact and lightweight design
- Direct connection to MODBUS® network
- MODBUS® convertor enables central monitoring and control of air conditioners from BMS or a central controller.
- Up to 9 converters can be connected to a VRF network (UTY-VMGX). Simultaneous control, such as Power ON/OFF and temperature setting, can be performed for each zone.
- If a connection error occurs after installation work is completed, the source of the error can be located easily.

Installation example

FG-TL-BMKM16Z1



Up to

16 indoor units

Up to

16 outdoor units

Up to

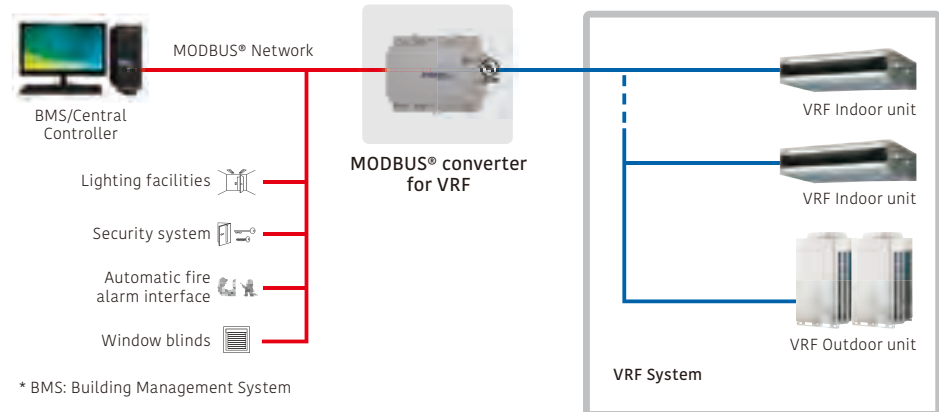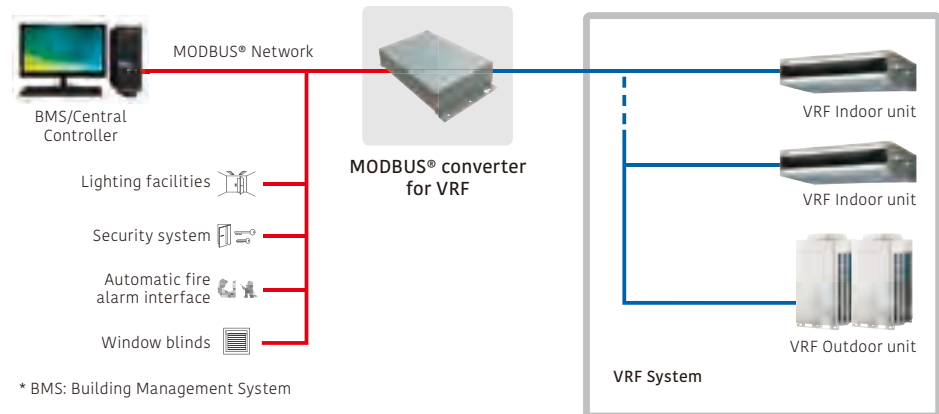128 indoor units**Specifications**

Model name	UTY-VMGX	FG-TL-BMKM16Z1
Power supply	Single phase ~220 to 240 V 50/60 Hz	12 to 36 VDC, Max: 250 mA or 24 VAC 50-60 Hz, Max: 127 mA*
Dimensions (H × W × D) (mm)	54 × 260 × 150	90 × 106 × 58
Weight (g)	1,100	375

*24 V DC power supply is recommended.

BACnet® interface

FG-AC-BAC1Z1 / FG-IR-BMG1Z1



Intesis®



FG-AC-BAC1Z1
(CN connector type)

Intesis®




FG-IR-BMG1Z1
(IR type)

Up to


1 indoor unit

- BACnet® interface connects BMS and a Fujitsu General split/multi-split/VRF system.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

Installation example

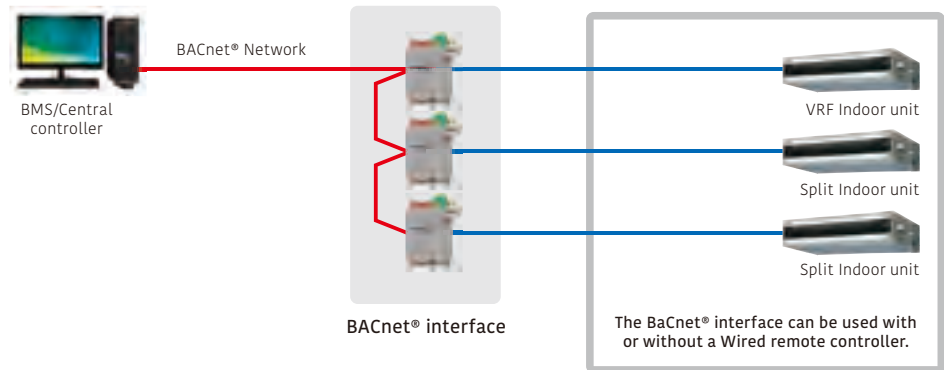

[IR type] Connection to wall-mounted type

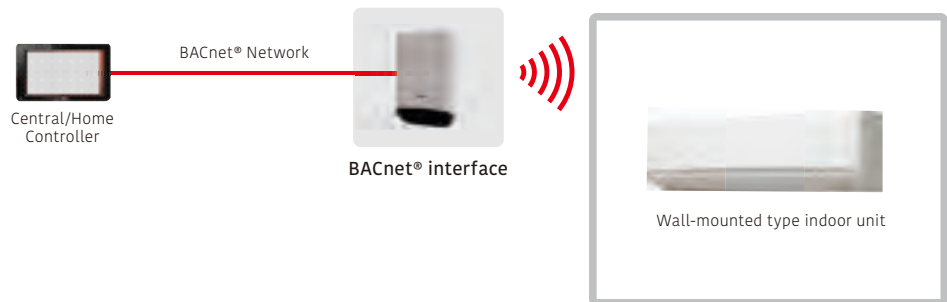

Specifications

Model name	FG-AC-BAC1Z1 (CN connector type)	FG-IR-BMG1Z1 (IR type)
Number of controllable groups	1	1
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 60 × 21
Weight (g)	85	55

12 V DC supplied by an indoor unit

BACnet® gateway

UTY-ABGXZ1 Software

 White-USB-key
(Software Protection Key)


BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

- A medium to large BMS can be connected to a VRF network system via BACnet®, a standard communication protocol for open networks.
- Up to 1,600 indoor units on up to 4 VRF network systems (up to 400 indoor units and 100 outdoor units per system) can be connected to a single BACnet® gateway.
- The VRF network system can be controlled or monitored from BMS via BACnet® gateway.
- Compatible with BACnet® (ANSI/ASHRAE-135-2014) application specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.
- Scheduling, alarm and event setting, and energy cost allocation are provided on the BACnet® gateway.
- The VRF network system can be connected to a computer via a U10 USB interface. Note that Fujitsu General does not supply a U10 USB interface or a computer. They must be purchased separately by the user.
- Corresponds to 7 different languages: English, Chinese, French, German, Spanish, Russian, Polish.

Up to

4 VRF network systems


Up to

400 outdoor units

Up to

1,600 indoor units

Installation example

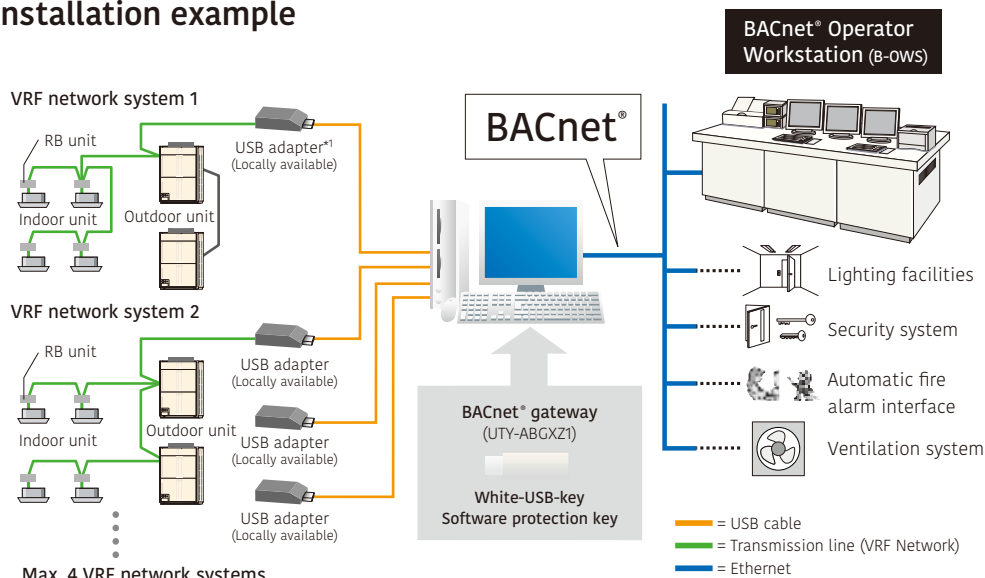

Computer requirements

UTY-ABGXZ1	
Operating system	• Microsoft Windows 10 Home (64-bit) • Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Home (64-bit) • Microsoft Windows 11 Pro (64-bit) Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel Core i3 2 GHz or higher
Memory	• 4 GB or more (for Windows 10) • 8 GB or more (for Windows 11)
HDD	40 GB or more of free space
Displayed items	1,024 × 768 or higher resolution
Interfaces	• Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line) • USB ports (Maximum of 5 ports) (Required only for the server PC that works as VRF controller) – Maximum of 1 USB ports are required for WHITE-USB-KEY connection – Maximum of 4 USB ports are required for Echelon U10 USB/U60-FT DIN Network Interface NOTE: Maximum number of required USB ports depends on the applicable system configuration.
Software	Adobe Reader 9.0 or later

- Transmission adapter (Required for each VRF network):
 - Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)
 - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

Packing list

Name and shape	Quantity	Application
White-USB-key (Software protection key with software)	1	Includes the software and manuals of tool for BACnet Gateway. Additionally, it works as the software protection key. Software protection key to be connected to an USB port on the PC that the BACnet Gateway is installed. BACnet Gateway runs only on a PC with this WHITE-USB-KEY.

BACnet® gateway

UTY-VBGX **Hardware**




BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

Up to
1 VRF network system
Up to
32 refrigerant systems
Up to
128 indoor units

- BACnet® gateway connects BMS and a Fujitsu General VRF system.
- Up to 128 indoor units and 32 refrigerant systems can be connected to a single BACnet® gateway.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

Installation example

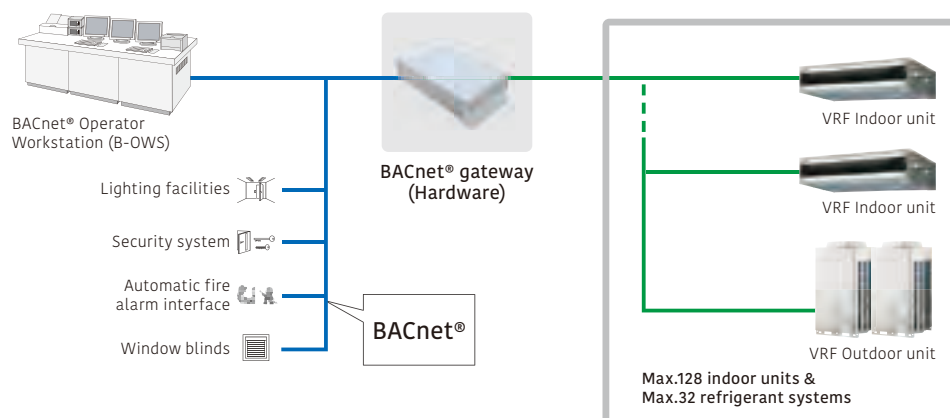

Specifications

Model name	UTY-VBGX
Number of controllable indoor units	128
Number of controllable refrigerant systems	32
Number of controllable VRF networks	1
Number of connectable units / one VRF network	4
Power supply	Single phase, 100-240 V, 50/60 Hz
Power consumption (W)	4.6 (max.)
Dimensions (H × W × D) (mm)	59.6 × 270.4 × 176
Weight (g)	1200

BACnet®/MODBUS® router

FG-RTR-BAC32Z1 / FG-RTR-MBS32Z1



Intesis®
BYE BUILT FOR THE FUTURE
FG-RTR-BAC32Z1
(BACnet)
Intesis®
BYE BUILT FOR THE FUTURE
FG-RTR-MBS32Z1
(MODBUS®)

Routing between BaCnet® MS/TP and BaCnet® IP networks


- Routing between BaCnet® MS/TP and BaCnet® IP networks
- Routing between MODBUS® RTU and MODBUS® TCP networks

Installation example

[BaCnet® type]

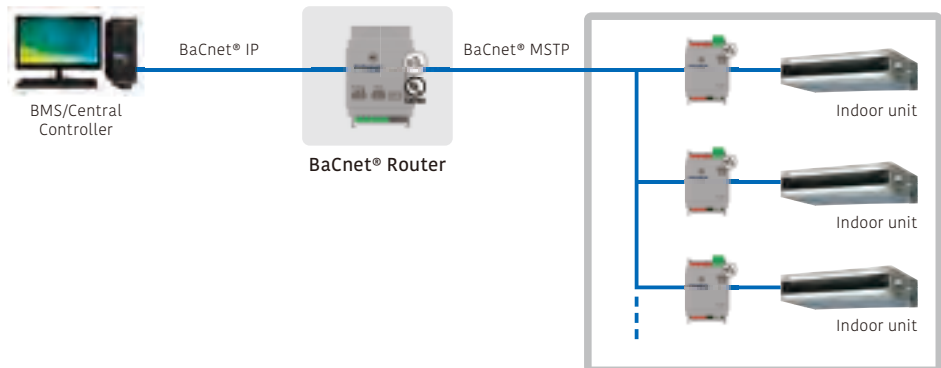

[MODBUS® type]

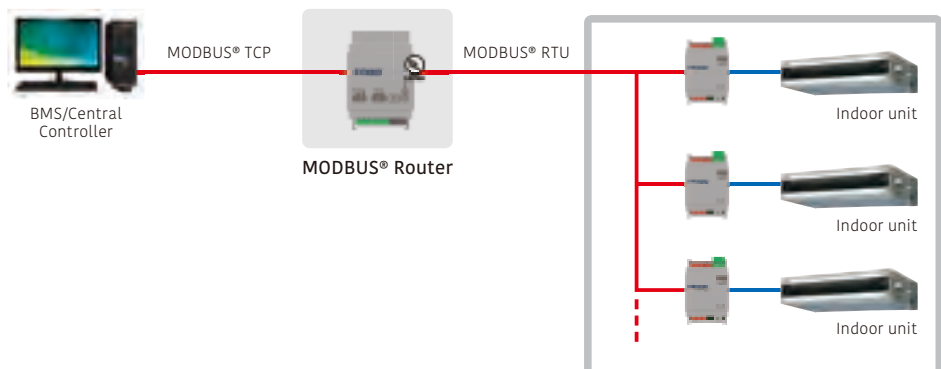

Specifications

Model name	FG-RTR-BAC32Z1 (MS/TP to IP)	FG-RTR-MBS32Z1 (RTU to TCP)
Number of routable devices (max.)	32	32
Power supply	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA
Power consumption (W)	1.7	1.7
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58
Weight (g)	150	150

BACnet®/MODBUS® cloud device

FG-CLD-BMG4Z1 / FG-CLD-BMG8Z1 / FG-CLD-BMG16Z1 / FG-CLD-BMG32Z1




Intesis®
BY THE POWER OF INTELLIGENCE



FG-CLD-BMG4/8/16/32Z1

- The most powerful configuration tool common to all BACnet® gateways provides the system integrators with the power to configure and monitor their systems in an easy and reliable manner.
- A simple, easy-to-use description for the ST Cloud Web and App User Interface, with all widgets customizable to the user's needs, enabling system integrators to easily offer the best user experience to customers who are in control of their BaCnet® or MODBUS® devices.

Installation example

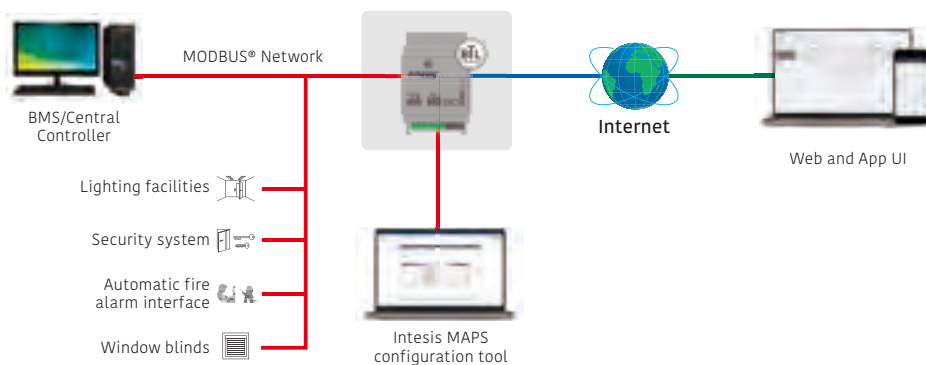

*BMS: Building Management System

Gateway features

- BaCnet® IP/MSTP or MODBUS® TCP/RTU connectivity
- Up to 32 devices can be connected to each gateway.
- Up to 12 widgets per device
- Easy device configuration with Intesis MAPS

Next-generation services

- Industrial-grade connectivity now for building automation
- Fast and scalable real-time edge connectivity over HMS HubTM
- Full data control and protection
- Secure and remote updates during the application lifetime

System Features

- Monitor and control all devices in an intuitive way
- Comes with a native iOS and Android app and a web interface
- Create scenes and interact with multiple concurrent devices
- Calendar that shows the daily planned installation commands
- Notifications keep you updated about system status
- Device sharing and usage permissions management
- Multiple site management from a common dashboard

Specifications

Model name	FG-CLD-BMG4Z1	FG-CLD-BMG8Z1	FG-CLD-BMG16Z1	FG-CLD-BMG32Z1
Number of connectable BaCnet® (IP/MSTP) or MODBUS® (TCP/RTU) devices	4	8	16	32
Power supply	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz
Power consumption (W)	1.7	1.7	1.7	1.7
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58	93 × 53 × 58	93 × 53 × 58
Weight (g)	150	150	150	150

KNX® converter for indoor unit

UTY-VKSX




Up to
1 indoor unit

KNX® Converter enables individual control of an indoor unit.


- The new KNX® converter connects a central or home controller and a Fujitsu General indoor unit.
- Compact and lightweight design

Installation example

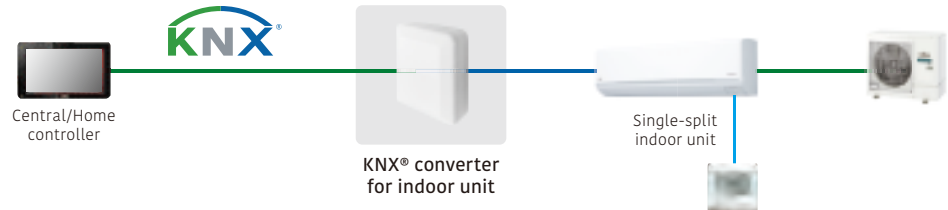

KNX® converter for VRF

UTY-VKGX / FG-TL-BMKM16Z1



UTY-VKGX

Up to
100 outdoor units
Up to
128 indoor units

Intesis
BY FUJITSU GENERAL




FG-TL-BMKM16Z1

Up to
16 outdoor units
Up to
16 indoor units

KNX® converter enables centralized control of a system.

- KNX® converter connects a central or home controller and a Fujitsu General VRF system.
- Up to 128 indoor units and 100 outdoor units can be connected to a single KNX® converter. (UTY-VKGX)

Installation example

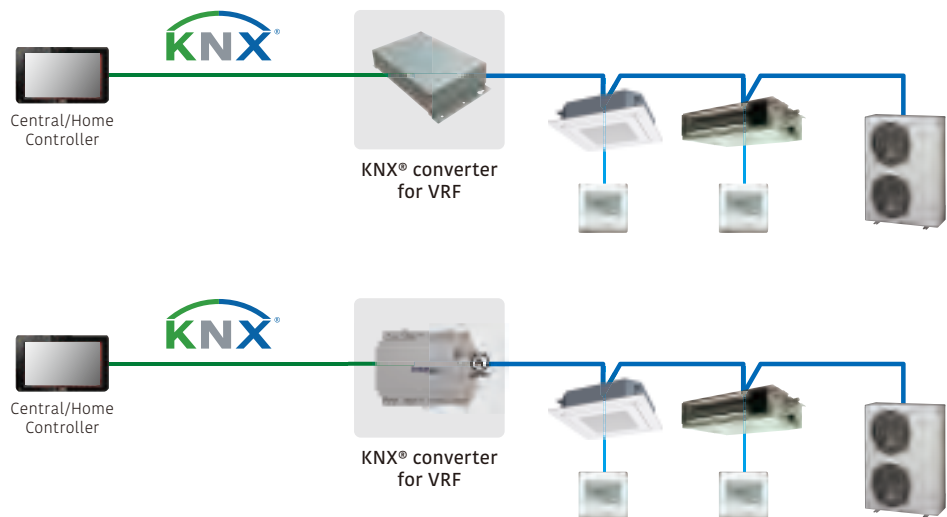

Specifications

Model name	UTY-VKSX	UTY-VKGX	FG-TL-BMKM16Z1
Power supply	12 V DC	Single phase ~220 to 240 V 50/60 Hz	12 to 36 VDC, Max: 250 mA or 24 VAC 50-60 Hz, Max: 127 mA*
Dimensions (H × W × D) (mm)	140 × 117 × 43	54 × 260 × 150	90 × 106 × 58
Weight (g)	215	1,200	375

*24 V DC power supply is recommended.

KNX® interface

FG-RC-KNX1Z1 / FG-AC-KNX1Z1 / FG-IR-KNX1Z1



Intesis®



FG-RC-KNX1Z1
(3-wire RC-line type)

Intesis®



FG-AC-KNX1Z1
(CN connector type)

Intesis®



FG-IR-KNX1Z1
(IR type)


Up to
1 indoor unit

The KNX® interface enables air conditioners to be fully integrated into a KNX® network system.


- Simple installation due to small and compact size.
- No separate external power supply required (only KNX® bus power required)

Installation example


[3-wire RC-line type/CN connector type]

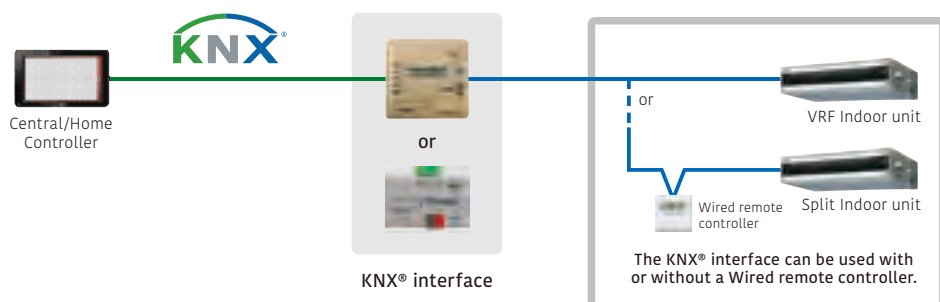

[IR type] Connection to wall-mounted type

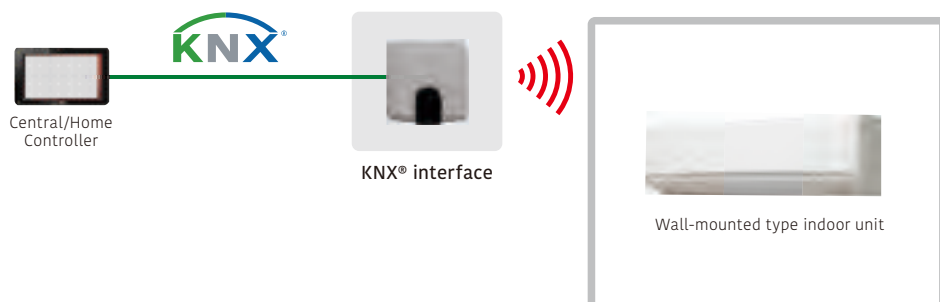

[IR type] Connection to a product other than wall-mounted type

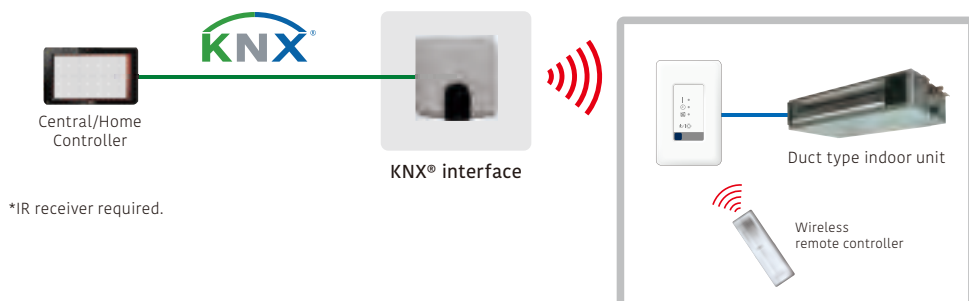

Specifications


Model name	FG-RC-KNX1Z1 (3-wire RC-line type)	FG-AC-KNX1Z1 (CN connector type)	FG-IR-KNX1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	70 × 70 × 28	45 × 59 × 21	81 × 78 × 28
Weight (g)	70	35	76

Network converter for single-split type

UTY-VTGX / UTY-VTGXV



UTY-VTGX
DC power supply type




UTY-VTGXV
AC power supply type

Up to
16 single indoor units
Up to
1 group
Up to
100 Network Converters


- A network converter is required when connecting a single-split system to a VRF network system.
- Compact and lightweight design
- Connectable to both nonpolar 2-core and polar 3-core remote controllers

Installation example


- A 1-remote-controller type and a 2-remote-controller type are available.
- Power supply (220 to 240 V AC, 50/60 Hz) is required for the 2-remote-controllers type.

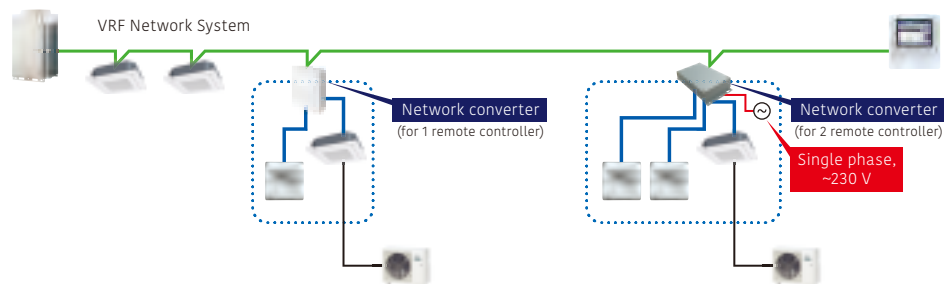

- Both nonpolar 2-core and polar 3-core type Wired remote controllers can be connected.

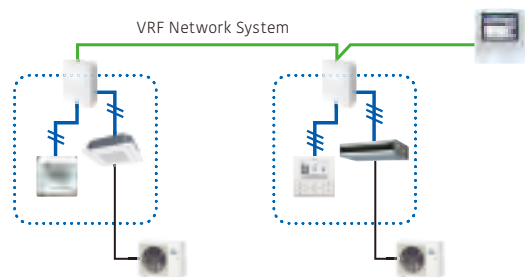

- Central control can be provided for single-split systems. (Up to 100 network converters can be connected in a VRF network system)

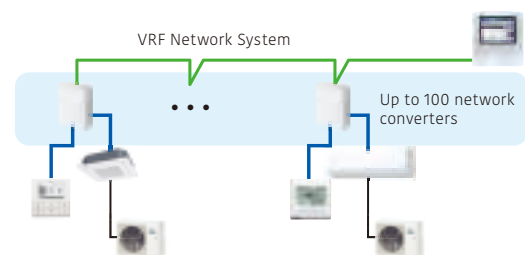

Specifications

Model name	UTY-VTGX		UTY-VTGXV
Power supply	Polar 3-core 12 V DC	Nonpolar 2-core DC 12 V	Single phase ~220 to 240 V 50/60 Hz
Input power (W)	Max. 1.2 W		Max. 3
Dimensions (H × W × D) (mm)	140 × 117 × 43		54 × 260 × 150
Weight (g)	250		1,100

Network converter for LONWORKS™


UTY-VLGX



Up to
4 units to BMS
Up to
100 outdoor units
Up to
128 indoor units

- Connects the VRF network system to a **LONWORKS™** open network to manage small and midsized BMS and VRF network system.
- The UTY-VLGX enables centralized monitoring and control of VRF network system from a BMS via a **LONWORKS™** interface.
- Up to 128 Indoor units can be connected to one network converter for **LONWORKS™**

Installation example

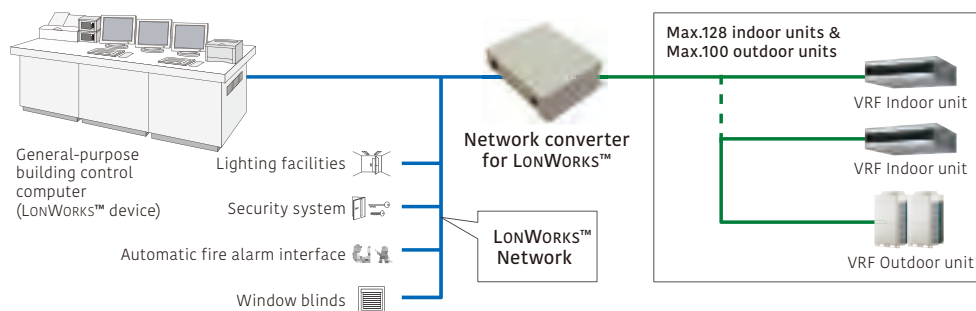

Specifications

Model name	UTY-VLGX
Power supply	Single phase ~208 to 240 V 50/60 Hz
Power consumption (W)	4.5
Dimensions (H × W × D) (mm)	67 × 288 × 211
Weight (g)	1,500

Transmission specifications (BMS side)

Transmission speed	78 kbps
Transceiver	FT-X1 (available from Echelon® Corporation)
Transmission line form	Free topology
Terminal resistor	None (converter to be attached at the terminal of a network)

External switch controller

UTY-TERX




Up to
1 group

Air conditioner switching can be controlled by connecting this external switch controller to other sensor switches.

- In combination with a commercially available card-key switch or other sensors, this External switch controller enables the control of ON/OFF, room temperature, and fan speed of connected air conditioners as well as master control functions. This makes this product an ideal choice for use in hotel rooms.
- Card key or other sensor switches are locally available.
- The set temperature can be specified at two points each for cooling and heating operations (4 points in total).

Installation example

Human sensor monitors the movement of a person in a room. When it detects that the person has left the room, it switches the air conditioner to low-capacity mode. When a person returns to the room, the air conditioner returns to the previous operation mode.

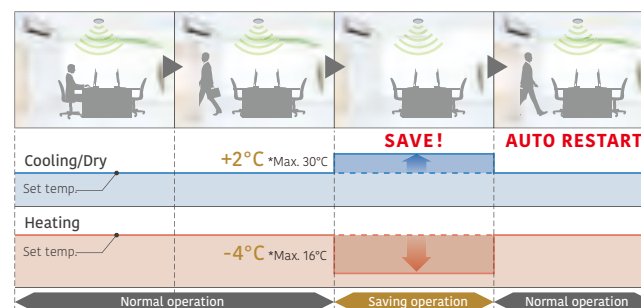

Human sensor equipment needs to be purchased separately. Human sensor is not mounted on an External switch controller.


Signal amplifier

UTY-VSGXZ1



- The transmission line can be extended up to 3,600 m using multiple Signal amplifiers.
- Up to 8 Signal amplifiers can be added in a VRF network system.
- A Signal amplifier is required.
 - (1) When the total wiring length of the transmission line exceeds 500 m.
 - (2) When the total number of units on the transmission line exceeds 64.

Installation example

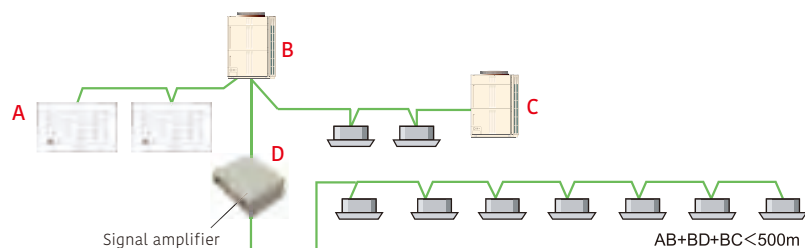

Specifications

Model name	UTY-VSGXZ1	UTY-TERX
Power supply	Single phase ~208 to 240 V 50/60 Hz	6.5 to 16 V DC
Power consumption (W)	4.5	-
Dimensions (H × W × D) (mm)	67 × 288 × 211	140 × 117 × 43
Weight (g)	1,500	250

12 V DC supplied by an indoor unit



Controller system list (available) for Split/Multi-split

Controller Options/Accessories:

Type	Refrigerant	Indoor unit				
		Wall-mounted				
		Designer Range		Standard Range		
		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEG07/09/12/14 KETG, KETG-B ASYG07/09/12/14 KETE, KETE-B	ASEH07/09/ 12/14KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG18/24KMTE	ASEH30/36KMTB
						
Controllers	Wired remote controller		● UTY-RVRY+ UTY-TWRXZ2			
			● UTY-RNRYZ5+ UTY-TWRXZ2			
			● UTY-RLRY+ UTY-TWRXZ2			
			● UTY-RCRYZ1+ UTY-TWRXZ2			
						
						
	Simple remote controller	 Nonpolar 2-core type	● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2			
	Home central remote controller					
	Wireless remote controller				● UTY-LNWX	
	IR receiver unit with Wireless remote controller	 For Duct type				
		 For Duct type  For Cassette type  For Ceiling type				



Indoor unit				
Wall-mounted			Cassette	
ECO Range			Compact 4-way flow Range	Circular flow Range
ASEH07/09/12KNCA	ASEG07/09/12KPCE	ASEH07/09/12KLTA	AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLB
				● UTY-RVRY
				● UTY-RNRYZ5
				● UTY-RLRY
				● UTY-RCRYZ1
				● UTY-RVNYM
				● UTY-RNNYM
				● UTY-RSRY UTY-RHRY
	● UTY-LNWX		● UTY-LNTY	
				● UTY-LBTYC

*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed. *2 Available only when the WLAN adapter (UTY-TFSXJ3) is removed.
*3 Consult your dealer for conditions of use.

Controller system list (available) for Split/Multi-split

Controller Options/Accessories:

Type	Refrigerant	Indoor unit						
		Duct						
		Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (compact)	Medium static pressure (Standard)	High static pressure		BIG
		ARXG 09/12/14/18 KLLAP	ARXH 12/14/18/22/24/ 30/36/45/54 KMTAP	ARXG 12/14/18/22/24/ 30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB		
							ARYG60LHTA	ARYG72/90LHTA
Controllers	Wired remote controller		● UTY-RVRY					● UTY-RVRY
			● UTY-RNRYZ5					● UTY-RNRYZ5
			● UTY-RLRY					● UTY-RLRY
			● UTY-RCRYZ1					● UTY-RCRYZ1
			● UTY-RVNYM		● UTY-RVNYM		● UTY-RVNYM	
			● UTY-RNNYM		● UTY-RNNYM		● UTY-RNNYM	
	Simple remote controller	 Nonpolar 2-core type	● UTY-RSRY UTY-RHRY					● UTY-RSRY UTY-RHRY
	Home central remote controller							
	Wireless remote controller							
	IR receiver unit with Wireless remote controller	 For Duct type					● UTY-LRHYM	
		 For Duct type  For Cassette type  For Ceiling type	● UTY-LBTYM					● UTY-LBTYM



Indoor unit							Outdoor unit
Floor	Ceiling	Multi-split					Single phase
		Wall-mounted		Compact cassette	Mini duct	Slim duct	5/6-unit multi-split
AGEG09/12/14KVCA	ABEG 18/22/24/30/ 36/45/54 KRTA	ASEH05KNCA	ASEG22KMTE	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP	AOEG36KBTA5
							AOYG45LBLA6
● UTY-RVRY+ UTY-TWRXZ3	● UTY-RVRY		● UTY-RVRY+ UTY-TWRXZ2	● UTY-RVRY			
● UTY-RNRYZ5+ UTY-TWRXZ3	● UTY-RNRYZ5		● UTY-RNRYZ5+ UTY-TWRXZ2	● UTY-RNRYZ5			
● UTY-RLRY+ UTY-TWRXZ3	● UTY-RLRY		● UTY-RLRY+ UTY-TWRXZ2	● UTY-RLRY			
● UTY-RCRYZ1+ UTY-TWRXZ3	● UTY-RCRYZ1		● UTY-RCRYZ1+ UTY-TWRXZ2	● UTY-RCRYZ1			
				● UTY-RVNYM			
				● UTY-RNNYM			
● UTY-RSRY UTY-RHRY+ UTY-TWRXZ3	● UTY-RSRY UTY-RHRY		● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2	● UTY-RSRY UTY-RHRY			
							● UTY-DMMYM1*3 (KBTA5) UTY-DMMYM*3 (LBLA6)
				● UTY-LNTY			
	● UTY-LBTYH				● UTY-LBTYM		

*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed. *2: Available only when the WLAN adapter (UTY-TFSXJ3) is removed.
*3: Consult your dealer for conditions of use.

Controller system list (available) for Split/Multi-split

Controller Options/Accessories:

Type	Refrigerant	Indoor unit				
		Wall-mounted				
		Designer Range		Standard Range		
		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEG07/09/12/14 KETF, KETF-B, ASYG07/09/12/14 KETE, KETE-B	ASEH07/09/12/14 KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG18/24KMTE	ASEH30/36KMTB
						
Interfaces	MODBUS® Converter			● UTY-VMSX		
	MODBUS® interface	 3-wire RC-line type		● FG-AC-MBS1Z1		
		 CN connector type				
	IR type			● FG-IR-BMG1Z1		
	KNX® converter			● UTY-VKSX		
	KNX® interface	 3-wire RC-line type		● FG-AC-KNX1Z1		
		 CN connector type				
	IR type			● FG-IR-KNX1Z1		
	WLAN adapter	 3-wire RC-line type ¹				
		 CN connector type				
		 USB type ²	● Accessory (KGTG, KGTG, KETF, KETF-B, KMCG, KMCF) UTY-TFSXH3 (KGTE, KETE, KETE-B, KMCE)		● UTY-TFSXH3	
		 3-wire RC-line type		● FG-AC-WIF1Z1		
		 CN connector type				
				● FG-IR-WIF1Z1		
External switch controller	3-wire RC-line type			● FG-AC-WMP1Z1		
		 CN connector type				
	IR type			● FG-IR-WMP1Z1		
Network converter for single-split type	External switch controller			● UTY-TERX+UTY-TWRXZ2		
	Network converter for single-split type	 DC power supply type	 AC power supply type	● UTY-VTGX+UTY-TWRXZ2 or UTY-VTGXV+UTY-TWRXZ2		



Indoor unit				
Wall-mounted			Cassette	
ECO Range			Compact 4-way flow Range	Circular flow Range
ASEH07/09/12KNCA	ASEG07/09/12KPCE	ASEH07/09/12KLTA	AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLB
				● UTY-VMSX
				● FG-RC-MBS1Z1 FG-AC-MBS1Z1
● FG-IR-BMG1Z1				
				● UTY-VKSX
				● FG-RC-KNX1Z1 FG-AC-KNX1Z1
● FG-IR-KNX1Z1				
				● UTY-TFSXJ3
● Accessory	● UTY-TFSXH3			
				● FG-RC-WIF1Z2 FG-AC-WIF1Z1
● FG-IR-WIF1Z1				
				● FG-RC-WMP1Z1 FG-AC-WMP1Z1
● FG-IR-WMP1Z1				
				● UTY-TERX
				● UTY-VTGX UTY-VTGXV

*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed. *2: Available only when the WLAN adapter (UTY-TFSXJ3) is removed.

Controller system list (available) for Split/Multi-split

Controller Options/Accessories:

Type		Refrigerant	Indoor unit					
			Duct					
			Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure	
	ARXG 09/12/14/18 KLLAP	ARXH 12/14/1822/24/ 30/36/45/54 KMTAP	ARXG 12/14/18/22/24/ 30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB			
						ARYG60LHTA	ARYG72/90LHTA	
Interfaces	MODBUS® Converter		● UTY-VMSX					
	MODBUS® interface	  3-wire RC-line type CN connector type	● FG-RC-MBS1Z1 FG-AC-MBS1Z1				● FG-AC-MBS1Z1	● FG-RC-MBS1Z1
		 IR type	● FG-IR-BMG1Z1+ UTY-LBTYC	● FG-IR-BMG1Z1+ UTY-LBTYM				● FG-IR-BMG1Z1+ UTY-LRHYM
	KNX® converter		● UTY-VKSX					
	KNX® interface	  3-wire RC-line type CN connector type	● FG-RC-KNX1Z1 FG-AC-KNX1Z1				● FG-AC-KNX1Z1	● FG-RC-KNX1Z1
		 IR type	● FG-IR-KNX1Z1+ UTY-LBTYC	● FG-IR-KNX1Z1+ UTY-LBTYM				● FG-AC-KNX1Z1+ UTY-LBTGM
	WLAN adapter	  3-wire RC-line type CN connector type	● UTY-TFSXJ3					
		 USB type ³						
		  3-wire RC-line type CN connector type	● FG-RC-WIF1Z2 FG-AC-WIF1Z1				● FG-AC-WIF1Z1	● FG-RC-WIF1Z2
		 IR type	● FG-IR-WIF1Z1+ UTY-LBTYC	● FG-IR-WIF1Z1+ UTY-LBTYM				● FG-IR-WIF1Z1+ UTY-LRHYM
  3-wire RC-line type CN connector type		● FG-RC-WMP1Z1 FG-AC-WMP1Z1				● FG-AC-WMP1Z1	● FG-RC-WMP1Z1	
 IR type		● FG-IR-WMP1Z1+ UTY-LBTYC	● FG-IR-WMP1Z1+ UTY-LBTYM				● FG-IR-WMP1Z1+ UTY-LRHYM	
External switch controller		● UTY-TERX						
Network converter for single-split type	  DC power supply type AC power supply type	● UTY-VTGX UTY-VTGXV						



Indoor unit							Outdoor unit
Floor	Ceiling	Multi-split					Single phase
		Wall-mounted		Compact cassette	Mini duct	Slim duct	5/6-unit multi-split
AGEG09/12/14KVCA	ABEG 18/22/24/30/ 36/45/54 KRTA	ASEH05KNCA	ASEG22KMTE	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP	AOEG36KBTAS
							AOYG45LBLA6
● UTY-VMSX	● UTY-VMSX*2	● UTY-VMSX		● UTY-VMSX*1		● UTY-VMSX	
● FG-RC-MBS1Z1 FG-AC-MBS1Z1	● FG-AC-MBS1Z1			● FG-AC-MBS1Z1		● FG-RC-MBS1Z1 FG-AC-MBS1Z1	
● FG-IR-BMG1Z1+ UTY-LRHVM	● FG-IR-BMG1Z1	● FG-IR-BMG1Z1+ UTY-LBTYH		● FG-IR-BMG1Z1		● FG-IR-BMG1Z1+ UTY-LBTYM	
● UTY-VKSX	● UTY-VKSX*2	● UTY-VKSX		● UTY-VKSX*1		● UTY-VKSX	
● FG-RC-KNX1Z1 FG-AC-KNX1Z1	● FG-AC-KNX1Z1			● FG-AC-KNX1Z1		● FG-RC-KNX1Z1 FG-AC-KNX1Z1	
● FG-IR-KNX1Z1+ UTY-LRHVM	● FG-IR-KNX1Z1	● FG-IR-KNX1Z1+ UTY-LBTYH		● FG-IR-KNX1Z1		● FG-IR-KNX1Z1+ UTY-LBTYM	
	● UTY-TFSXJ3					● UTY-TFSXJ3	
			● Accessory	● UTY-TFSXH3			
● FG-RC-WIF1Z2 FG-AC-WIF1Z1	● FG-AC-WIF1Z1			● FG-AC-WIF1Z1		● FG-RC-WIF1Z2 FG-AC-WIF1Z1	
● FG-IR-WIF1Z1+ UTY-LRHVM	● FG-IR-WIF1Z1	● FG-IR-WIF1Z1+ UTY-LBTYH		● FG-IR-WIF1Z1		● FG-IR-WIF1Z1+ UTY-LBTYM	
● FG-RC-WMP1Z1 FG-AC-WMP1Z1	● FG-AC-WMP1Z1			● FG-AC-WMP1Z1		● FG-RC-WMP1Z1 FG-AC-WMP1Z1	
● FG-IR-WMP1Z1+ UTY-LRHVM	● FG-IR-WMP1Z1	● FG-IR-WMP1Z1+ UTY-LBTYH		● FG-IR-WMP1Z1		● FG-IR-WMP1Z1+ UTY-LBTYM	
● UTY-TERX	● UTY-TERX+ UTY-TWRXZ3	● UTY-TERX		● UTY-TERX+ UTY-TWRXZ2		● UTY-TERX	
● UTY-VTGX UTY-VTGXV	● UTY-VTGX+ UTY-TWRXZ3 UTY-VTGXV+ UTY-TWRXZ3	● UTY-VTGX UTY-VTGXV		● UTY-VTGX+ UTY-TWRXZ2 or UTY-VTGXV+ UTY-TWRXZ2		● UTY-VTGX UTY-VTGXV	

*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed. *2: Available only when the WLAN adapter (UTY-TFSXJ3) is removed.

Controller system list (available) for VRF

Controller Options:

Type		Refrigerant	Indoor unit					
			Cassette					
			One-way flow	3D flow	Compact		Slim type	Large type
					Grid type/Standard type		Circular flow	
				AUXB 004/005/007/009/ 012/014/018 HLAH	AUXN 009/012/014 HLAH			
								
			AUXV 004/007/009/012/ 014/018/024 GLEH	AUXS018/024GLEH	AUXB 004/007/009/012/ 014/018/024 GLEH		AUXM 018/024/030 GLEH	AUXK 018/024/030/034/ 036/045/054 GLEH
Controllers	Wired remote controller		● UTY-RVRY					
			● UTY-RNRYZ5					
			● UTY-RLRY					
			● UTY-RCRYZ1					
	Simple remote controller	 Nonpolar 2-core type	● UTY-RSRY UTY-RHRY					
	Wireless remote controller	 UTY-LNVY UTY-LNHY	● UTY-LNVY UTY-LNHY					
	IR receiver unit		● UTY-TRHX			● UTY-LBHXD		
	Central remote controller		● UTY-DCGYZ3					
	Touch panel controller		● UTY-DTGYZ1					
	System controller, System controller Lite		● UTY-APGXZ1, UTY-ALGXZ1					



Indoor unit						
Duct						
Mini (With drain pump)	Low static pressure			Low static pressure	Medium static pressure	High static pressure
	Slim (With drain pump)			High Efficiency	Normal	Normal
		ARXD 004/005/007/009/012/ 014/018/024 HLAH	ARXP 009/012/014 HLAH			
ARXK 004/007/009/012/ 014/018/024 GLGH	ARXD04GALH	ARXD 007/009/012/ 014/018/024 GLEH		ARXP018/030GLFH	ARXA 024/030/036/045 GLEH	ARXC 036/045/060/ 072/090/096 GTEH
● UTY-RVRY						
● UTY-RNRYZ5						
● UTY-RLRY						
● UTY-RCRYZ1						
● UTY-RSRY UTY-RHRY						
● UTY-LNVY UTY-LNHY						
● UTY-TRHX	● UTB-YWC	● UTY-TRHX				
● UTY-DCGYZ3						
● UTY-DTGYZ1						
● UTY-APGXZ1, UTY-ALGXZ1						

Controller system list (available) for VRF

Controller Options:

Type	Refrigerant	Indoor unit			
		Floor		Ceiling/ Floor	Ceiling
		—	External EEV		
					
		AGYA 004/007/009/012/014 GCGH	AGYE 004/007/009/012/014 GCEH	ABYA 012/014/018/024 GTEH	ABYA 030/036/045/054 GTEH
Controllers	Wired remote controller		● UTY-RVRY		
			● UTY-RNRYZ5		
			● UTY-RLRY		
			● UTY-RCRYZ1		
	Simple remote controller	 Nonpolar 2-core type	● UTY-RSRY UTY-RHRY		
	Wireless remote controller	 UTY-LNVY UTY-LNHY	● UTY-LNVY UTY-LNHY		
	IR receiver unit				
	Central remote controller		● UTY-DCGYZ3		
	Touch panel controller		● UTY-DTGYZ1		
	System controller, System controller Lite		● UTY-APGXZ1, UTY-ALGXZ1		



Indoor unit					
Wall-mounted					
–	External EEV	–	External EEV	–	–
ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH				
ASYA 004/007/009 GCGH	ASYE 004/007/009 GCEH	ASYA012/014GCGH	ASYE012/014GCEH	ASYA18/24GBCH	ASYA030/034GTEH

●
UTY-RVRY

●
UTY-RNRYZ5

●
UTY-RLRY

●
UTY-RCRYZ1

●
UTY-RSRY
UTY-RHRY

●
UTY-LNVY
UTY-LNHY

●
UTY-DCGYZ3

●
UTY-DTGYZ1

●
UTY-APGXZ1, UTY-ALGXZ1

Controller system list (available) for VRF

Controller Options:

Type			Refrigerant	Indoor unit					
				Cassette					
				One-way flow	3D flow	Compact		Slim type	Large type
						Grid type/Standard type		Circular flow	
				AUXB 004/005/007/009/ 012/014/018 HLAH	AUXN 009/012/014 HLAH				
			AUXV 004/007/009/012/ 014/018/024 GLEH	AUXS018/024GLEH	AUXB 004/007/009/012/ 014/018/024 GLEH	AUXM 018/024/030 GLEH	AUXK 018/024/030/034/ 36/045/054 GLEH		
Interfaces	BACnet® gateway		● UTY-ABGXZ1, UTY-VBGX						
		 CN connector type	● FG-AC-BAC1Z1						
		 IR type	● FG-IR-BMG1Z1+UTY-TRHX	● FG-IR-BMG1Z1	● FG-IR-BMG1Z1+UTY-LBHXD				
	Network converter for LonWORKS™		● UTY-VLGX						
	MODBUS® Converter		● UTY-VMSX						
			● UTY-VMGX FG-TL-MBS16Z1						
	MODBUS® interface	  3-wire RC-line type CN connector type	● FG-AC-MBS1Z1						
		 IR type	● FG-IR-BMG1Z1+UTY-TRHX	● FG-IR-BMG1Z1	● FG-IR-BMG1Z1+UTY-LBHXD				
	KNX® converter		● UTY-VKSX						
			● UTY-VKGX FG-TL-KNX16Z1						
	KNX® interface	  3-wire RC-line type CN connector type	● FG-AC-KNX1Z1						
		 IR type	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1	● FG-IR-KNX1Z1+UTY-LBHXD				
	WLAN adapter	 CN connector type ^{*1}	● UTY-TFSXJ3						
		  3-wire RC-line type CN connector type	● FG-AC-WIF1Z1						
		 IR type	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1	● FG-IR-WIF1Z1+UTY-LBHXD				
		  3-wire RC-line type CN connector type	● FG-AC-WMP1Z1						
		 IR type	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1	● FG-IR-WMP1Z1+UTY-LBHXD				
	External switch controller		● UTY-TERX						



Indoor unit						
Duct						
Mini (With drain pump)	Low static pressure			Low static pressure	Medium static pressure	High static pressure
	Slim (With drain pump)		High Efficiency	High Efficiency	Normal	Normal
		ARXD 004/005/007/009/ 012/014/018/024 HLAH	ARXP 009/012/014 HLAH			
ARXK 004/007/009/012/ 014/018/024 GLGH	ARXD04GALH	ARXD 007/009/012/ 014/018/024 GLEH		ARXP018/030GLFH	ARXA 024/030/036/045 GLEH	ARXC 036/045/060/ 072/090/096 GTEH
● UTY-ABGXZ1, UTY-VBGX						
● FG-AC-BAC1Z1		● FG-AC-BAC1Z1				
● FG-IR-BMG1Z1+ UTY-TRHX	● FG-IR-BMG1Z1+ UTB-YWC	● FG-IR-BMG1Z1+UTY-TRHX				
● UTY-VLGX						
● UTY-VMSX		● UTY-VMSX				
● UTY-VMGX FG-TL-MBS16Z1						
● FG-AC-MBS1Z1	● FG-RC-MBS1Z1	● FG-AC-MBS1Z1				
● FG-IR-BMG1Z1+ UTY-TRHX	● FG-IR-BMG1Z1+ UTB-YWC	● FG-IR-BMG1Z1+UTY-TRHX				
● UTY-VKSX		● UTY-VKSX				
● UTY-VKGX FG-TL-KNX16Z1						
● FG-AC-KNX1Z1	● FG-RC-KNX1Z1	● FG-AC-KNX1Z1				
● FG-IR-KNX1Z1+ UTY-TRHX	● FG-IR-KNX1Z1+ UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX				
● UTY-TFSXJ3 (007-024)		● UTY-TFSXJ3				
● FG-AC-WIF1Z1	● FG-RC-WIF1Z2	● FG-AC-WIF1Z1				
● FG-IR-WIF1Z1+ UTY-TRHX	● FG-IR-WIF1Z1+ UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX				
● FG-AC-WMP1Z1	● FG-RC-WMP1Z1	● FG-AC-WMP1Z1				
● FG-IR-WMP1Z1+ UTY-TRHX	● FG-IR-WMP1Z1+ UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX				
● UTY-TERX						

Controller system list (available) for VRF

Controller Options:

Type	Refrigerant	Indoor unit			
		Floor		Ceiling/ Floor	Ceiling
		—	external EEV		
					
		AGYA 004/007/009/012/014 GCGH	AGYE 004/007/009/012/014 GCEH	ABYA 012/014/018/024 GTEH	ABYA 030/036/045/054 GTEH
Interfaces	BACnet® gateway		● UTY-ABGXZ1, UTY-VBGX		
		 CN connector type	● FG-AC-BAC1Z1		
		 IR type	● FG-IR-BMG1Z1		
	Network converter for LonWorks™		● UTY-VLGX		
	MODBUS® Converter		● UTY-VMSX		
			● UTY-VMGX FG-TL-MBS16Z1		
	MODBUS® interface	  3-wire RC-line type CN connector type	● FG-AC-MBS1Z1		
		 IR type	● FG-IR-BMG1Z1		
	KNX® converter		● UTY-VKXS		
			● UTY-VKGX FG-TL-KNX16Z1		
	KNX® interface	  3-wire RC-line type CN connector type	● FG-AC-KNX1Z1		
		 IR type	● FG-IR-KNX1Z1		
	WLAN adapter	 CN connector type ^{*1}	● UTY-TFSXJ3		
		  3-wire RC-line type CN connector type	● FG-AC-WIF1Z1		
		 IR type	● FG-IR-WIF1Z1		
		  3-wire RC-line type CN connector type	● FG-AC-WMP1Z1		
		 IR type	● FG-IR-WMP1Z1		
	External switch controller		● UTY-TERX		



Indoor unit					
Wall-mounted					
–	external EEV	–	external EEV	–	–
ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH				
ASYA 004/007/009 GCGH	ASYE 004/007/009 GCEH	ASYA012/014GCGH	ASYE012/014GCEH	ASYA18/24GBCH	ASYA030/034GTEH
● UTY-ABGXZ1, UTY-VBGX					
● FG-AC-BAC1Z1				● FG-AC-BAC1Z1	
● FG-IR-BMG1Z1					
● UTY-VLGX					
● UTY-VMSX				● UTY-VMSX	
● UTY-VMGX FG-TL-MBS16Z1					
● FG-AC-MBS1Z1			● FG-RC-MBS1Z1	● FG-AC-MBS1Z1	
● FG-IR-BMG1Z1					
● UTY-VKSX				● UTY-VKSX	
● UTY-VKGX FG-TL-KNX16Z1					
● FG-AC-KNX1Z1			● FG-RC-KNX1Z1	● FG-AC-KNX1Z1	
● FG-IR-KNX1Z1					
● UTY-TFSXJ3				● UTY-TFSXJ3	
● FG-AC-WIF1Z1			● FG-RC-WIF1Z2	● FG-AC-WIF1Z1	
● FG-IR-WIF1Z1					
● FG-AC-WMP1Z1			● FG-AC-WMP1Z1	● FG-AC-WMP1Z1	
● FG-IR-WMP1Z1					
● UTY-TERX					

Optional parts Overview

For Split & Multi-split, VRF

A variety of optional parts are available to enable installation of the selected indoor unit properly according to the environment.


Optional Parts

For Cassette



Human sensor kit

A built-in thermo sensor monitors and controls room temperature accurately.



Cassette grille

A lineup of cassette grilles that match a variety of interiors. A grid ceiling-type cassette grille has been added to the lineup.




Silver ion filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*




Fresh air intake kit

Fresh air can be taken in by a fan connected to an external control unit.




Insulation kit for high humidity

Insulation kit for high humidity is used when the installation location is in a high humidity environment.




Air outlet shutter plate

Airflow directions can be changed to 3 directions using the Air outlet shutter plate depending on the installation location.



Wide Panel

When a cassette type is installed in a narrow space in the ceiling, the wide panel fills in that space.



Panel spacer

If the ceiling space is tight and the main body protrudes from the ceiling surface, a panel spacer can be used as a decorative trim.

Optional Parts

For V-IV



Pressure sensor kit

When installed, the height difference between the outdoor unit and indoor unit can be allowed up to 110 m.

Optional Parts

For R32 VRF products



Gas Sensor kit

Used to ensure standards compliance and safety when R32 VRF products are installed.



Expansion kit

Connect to indoor units to expand the number of inputs and outputs when using multiple safety devices or external input / output functions.

Optional Parts

For Floor



Half concealed kit

Used to half conceal a floor type indoor unit in the wall.



Silver ion filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*


Optional Parts

For Duct & Ceiling



Auto louver grille kit

The optional clean-looking flat Auto louver grille blends into any interior and provides a comfortable airflow.



Silver ion filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*



Long-life filter

Captures grit and dust. Long-life design with consideration of running costs.



Flange

Flanges are used when connecting a medium static pressure duct type and a ceiling type with air intake and exhaust ducts.



Drain pump unit

Drains water that has accumulated during operation.

Optional Parts

For Common



Remote sensor unit

Detects the room temperature around the sensor. Used to construct systems that improve comfort. (See the options list for compatible devices.)



Connection Parts



For wall-mounted type

Communication kit

Required for a wall-mounted type when the External connect kit set or a Wired remote controller is connected to the indoor unit.



For wall-mounted type

External input and output PCB


For Wall-mounted, Duct, or Cassette type, these parts are required when the external input and output function is used.



For Duct type and Cassette type

External input and output PCB box & bracket

Box and bracket for installing the External input and output PCB.



External connect kit & set

Connect the printed circuit board (PCB) to external devices.



Connection Units

Connection units are available to separate the pipes when connecting multiple indoor units in a Multi-split type or VRF system.



External power supply unit

The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.

*Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.

Silver Ion Filter

UTR-FA16-5 / UTR-FA13-3 / UTR-FA03-5 / UTD-HFAA / UTD-HFRA / UTD-HFTA / UTD-HFTB / UTD-HFTC / UTD-HFNC / UTD-HFNB / UTD-HFNA / UTD-HFND / UTD-HFKB / UTD-HFKA



For Wall mounted / Floor
UTR-FA16-5 / UTR-FA13-3
UTR-FA03-5

For Cassette
UTD-HFAA / UTD-HFRA


For Duct
UTD-HFTA / UTD-HFTB
UTD-HFTC / UTD-HFNC
UTD-HFNB / UTD-HFNA
UTD-HFND / UTD-HFKB
UTD-HFKA

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.

(Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.)

The silver ion filter inhibits the activities of viruses*1, bacteria*2 and molds*3 trapped on the filter with dust or droplet)

(Only effective when the microorganism is trapped on the filter with dust or droplet)

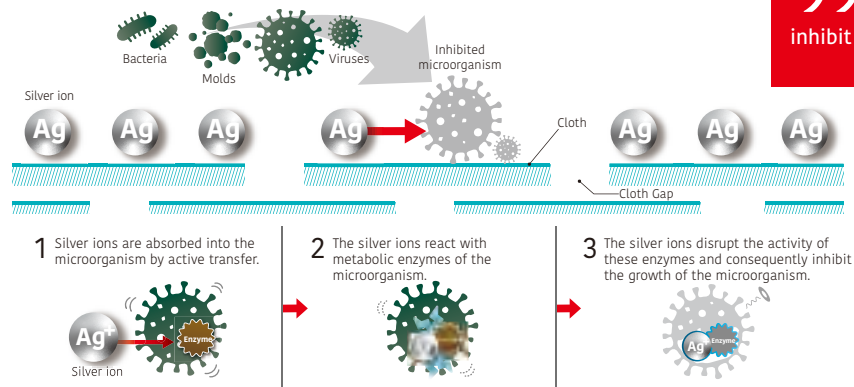

99 %
inhibit rate*1


*1 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0408 [Test virus] Escherichia coli phage Qbeta NBRC 20012 (1 type) [Test Method] Based on the antiviral test method for textile products (JIS L 1922) [Test results] Inhibited by at least 99% in 24 hours. Not tested to prevent transmission of SARS-CoV-2.

*2 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0409 [Test bacteria] Escherichia coli NBRC 3972 (1 type) [Test Method] Based on the determination of antibacterial activity and efficacy of textile products (JIS L 1902) [Test results] The growth of the test bacteria was inhibited by 24 hours testing

*3 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0410 [Test fungi] Aspergillus Niger NBRC 105649 and other fungi (3 types) [Test Method] Based on the test for fungus resistance (JIS Z 2911) [Test results] The growth of the fungus was inhibited by 28 days testing

The filter is easily removable* and hand-washable.

(*Wall mounted and floor models only)

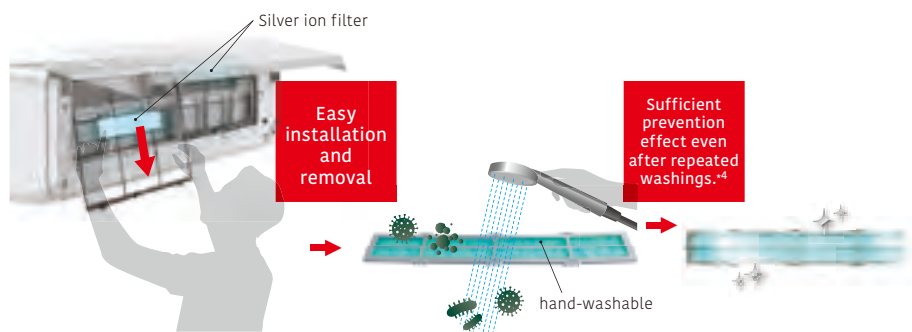

*4 Hand-washing or vacuuming by 3 months is recommended. Cleaning frequency varies depending on the environment of use.

Specifications

Model name		For Wall mounted / Floor			for Cassette	
		UTR-FA16-5	UTR-FA13-3	UTR-FA03-5	UTD-HFAA	UTD-HFRA
Net Dimension (H × W × D)	mm	35 × 210 × 6	50 × 364 × 6	43 × 272 × 6	350 × 125 × 6	550 × 136 × 6
Weight	g	2	2	2	7	23
Quantity		2	2	2	1	1


Model name		for Duct							
		UTD-HFTA	UTD-HFTB	UTD-HFTC	UTD-HFNC	UTD-HFNB	UTD-HFNA	UTD-HFND	UTD-HFKB / UTD-HFKA
Net Dimension (H × W × D)	mm	290 × 70 × 6	390 × 70 × 6	290 × 70 × 6 390 × 70 × 6	620 × 88 × 6	420 × 88 × 6	620 × 88 × 6	500 × 79 × 6	420 × 125 × 6 620 × 108 × 6
Weight	g	6	8	10	8	10	16	12	16 20
Quantity		2	2	3	1	2	2	2	2 2

Auto louver grille kit

UTD-GXTA-W / UTD-GXTB-W / UTD-GXTC-W




The optional clean-looking flat Auto louver grille kit blends into any interior and provides a comfortable airflow.

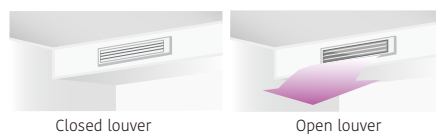


Flexible Control

- The Auto louver grille of the indoor unit can be operated in conjunction with the remote control of the indoor unit.
- **Vertical auto swing**
 - Auto airflow direction and auto swing
 - 4 steps selectable
- **Auto-closing louver**
The louvers will automatically close when the indoor unit stops operating.

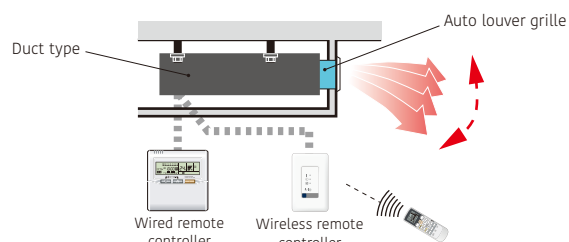

Dimensions

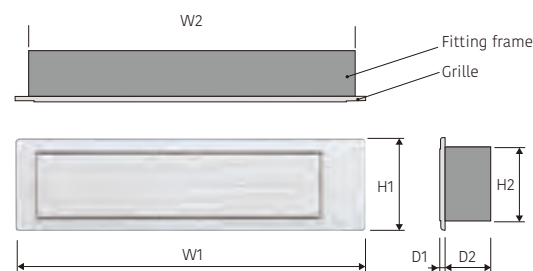

Unit: mm

Model name	W1	W2	H1	H2	D1	D2
UTD-GXTA-W	683	645				
UTD-GXTB-W	883	845	180	148	9	84
UTD-GXTC-W	1,083	1,045				

Specifications

Model name			UTD-GXTA-W	UTD-GXTB-W	UTD-GXTC-W
Applicable indoor unit	SPLIT & MULTI-SPLIT		ARYG07/09LLTA ARXG07/09/12/14KSLAP ARXG07/09/12/14KLLAP ARYG07/09LSLAP	ARXG18KSLAP ARXG18KLLAP	
	VRF		ARXD007/009/012/014GLEH ARXK004/007/009/012/014GLGH ARXD04GALH ARXD004/005/007/009/012/014HLAH ARXP009/012/014HLAH	ARXD018GLEH ARXD018HLAH ARXK018GLGH	ARXD024GLEH ARXD024HLAH ARXK024GLGH
Power supply			Connecting with Control box of indoor unit		
Fixing Auto louver grille			Screwed to Flange or Square duct		
Extension Square duct limit			1.0 m (Max. duct length between indoor unit and Auto louver grille)		
Net Dimensions (H × W × D)		mm	180 × 683 × (84 + 9)	180 × 883 × (84 + 9)	180 × 1,083 × (84 + 9)
Weight	Net	kg (lbs)	2.0 (4.4)	2.5 (5.6)	3.0 (6.7)
Accessories			Fitting Flame, etc.		
Operating range	Cooling	°C	18 to 32		
		% RH	80 % or less		
	Heating	°C	16 to 30		


Pressure sensor kit

UTY-SPWX




Design flexibility

The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-IV series, but can be extended to 110 m by installing the Pressure sensor kit. (Can only be connected to the V-IV series. Also, it can only be connected to outdoor units using outdoor unit software compatible with the product.)

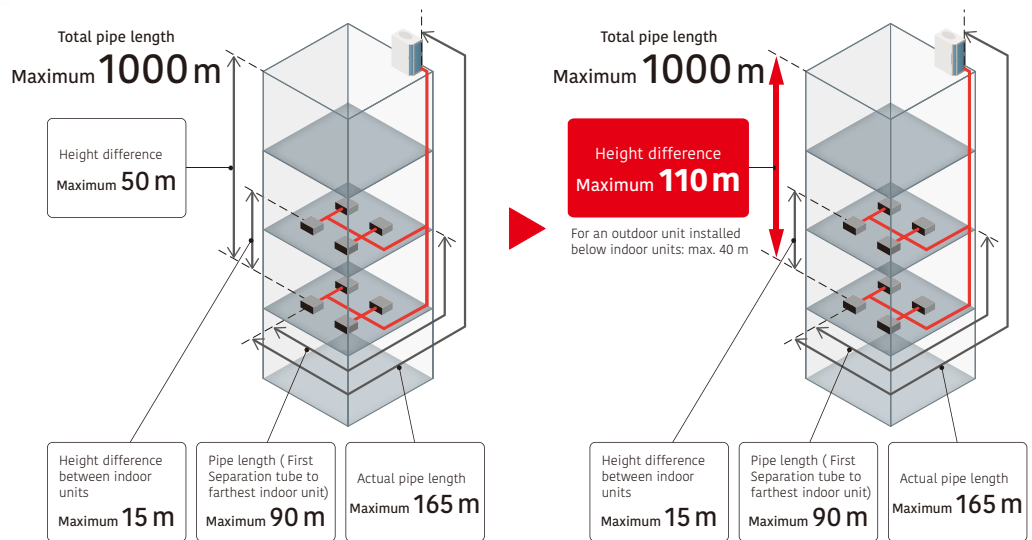

System overview

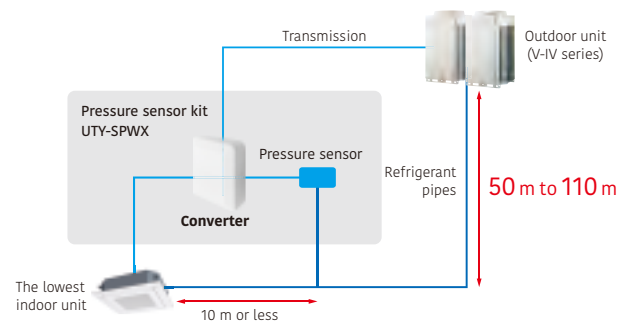

Pressure sensor kit

Pressure sensor kit (Converter)	Refrigerant pressure sensor	Joint pipe

Specifications

Model name	UTY-SPWX
Power supply	9 to 16 V DC
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200

External power supply unit

UTZ-GXXA / UTZ-GXXC



The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.


Connects to the External power supply unit to supply power to the indoor unit from the auxiliary power supply. This allows for continuous operation without system errors.

Built-in relays reduce installation time and cost.

The UTZ-GXXC have a built-in relay, which reduces installation time and cost.

High reliability

- A: Interruption of the main power supply is detected by the power cut-off detection part.
- B: Supplies power for driving the expansion valve of the indoor unit. (12 V or 5 V DC)
- C: Gives notification of the power supply from the External power supply unit.

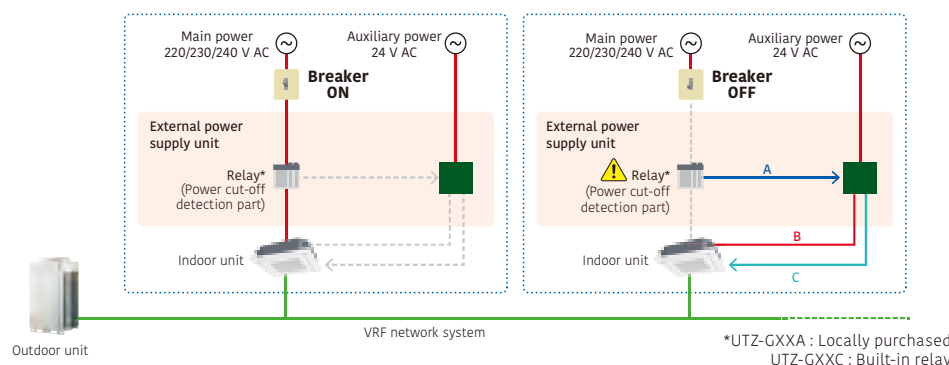

Note

- When changing the power supply voltage to 24 V AC, use a power transformer with an insulated structure that complies with the regulations* of the installation region.
- A powered-off indoor unit driven by the External power supply unit is treated in the same way as an operation-off unit in the electricity charge appointment function. If standby power is generated, the result of the electricity charge appointment may not be zero.

* UL Class II or IEC 61558 Class III, for example.

Specifications


Model name	UTZ-GXXA	UTZ-GXXC
Power supply	24 V AC 50/60 Hz	
Dimensions (H × W × D) (mm)	97 × 200 × 178	
Weight (g)	800	

AIR BEAM Radiation air outlet unit


*Production by order
Contact us for more details.



Key component



Cross-section view

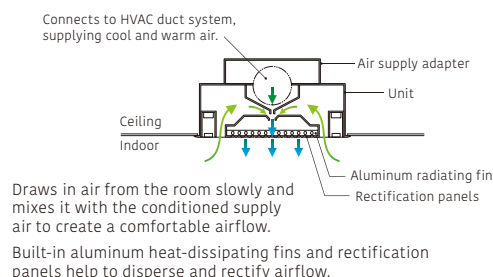

Airflow rate (m³/h)	180 (160-215)	270 (240-325)
Grid	600 × 2	600 × 3
AIR BEAM For system ceiling (Integrated type)	 KS-180	 KS-270

Gas sensor kit


UTY-SGZY



Enhanced safety measures for R32

The system is designed to meet the environmental safety requirements specified in the IEC 603352-40 standard for the use of R32 refrigerant. The environment requiring safety measures is determined by the size of the room in relation to the amount of refrigerant required.

For Example: Total pipe length 120m

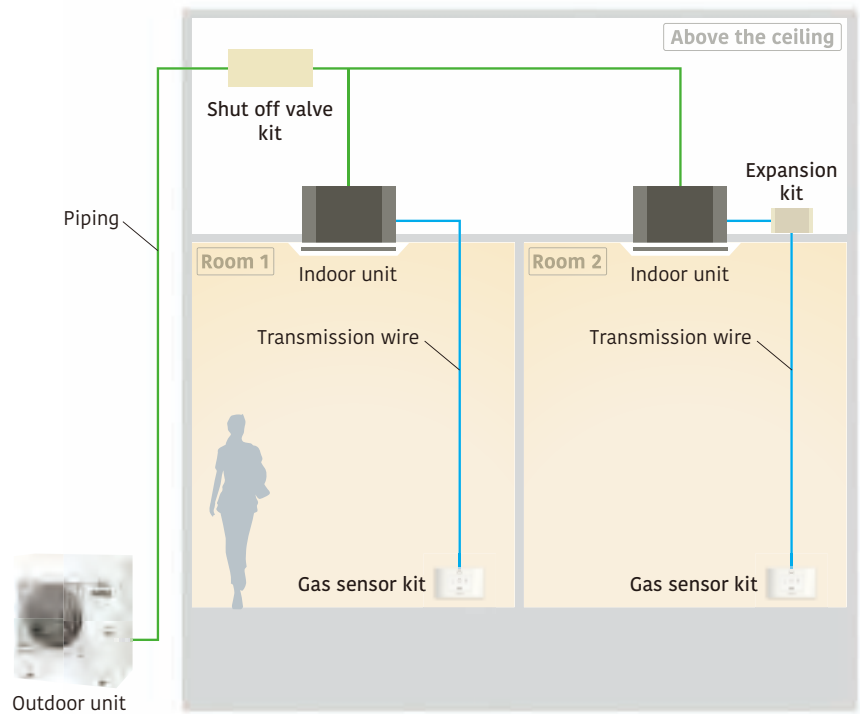

Shut off valve kit UTP-GX027A, UTP-GX060A

Block the path to prevent refrigerant flow in the event of a refrigerant leakage.



Gas sensor kit UTY-SGZY*

Gas Sensor kit Used to ensure standards compliance and safety when R32 VRF products are installed.

*Connection cable (UTY-XWZXZL) is required.




Expansion kit UTZ-JXXA

Used to ensure standards compliance and safety when R32 VRF products are installed.

Conditions requiring safety measures

The graph below will help you determine if a safety design is required when installing R32 VRF products. The amount of refrigerant in a refrigerant system determines the floor area, and if the room to be conditioned by the system is less than that area, a "shut off valve kit" and a "gas sensor kit" must be installed.

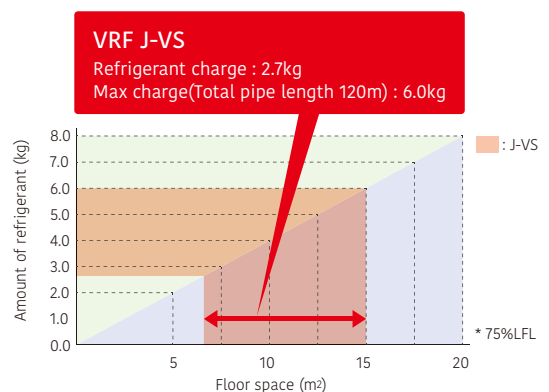


Refrigerant leak detector connection pattern


1) Corresponds to the case where the classification of air conditioner installation differs from property to property.

Installation position of "Shut off valve kit"


- A** Indoor unit 1~4 in one room
- B** Indoor units 1, 2 and 3, 4, if they are set up in two separate rooms.
- C** Indoor units 1~4 are installed in different rooms.

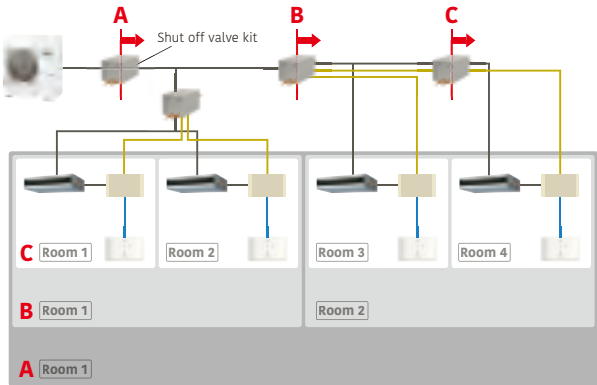

2) Multiple rooms or areas are air conditioned using ducted airflow paths

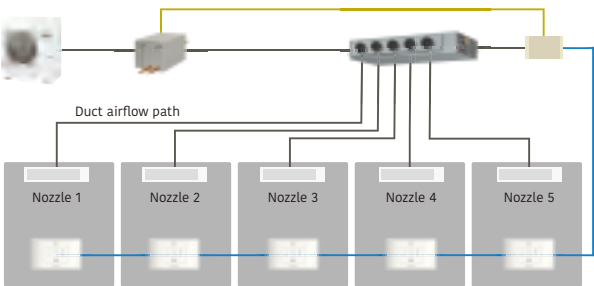

3) When operating multiple indoor units with a remote control group

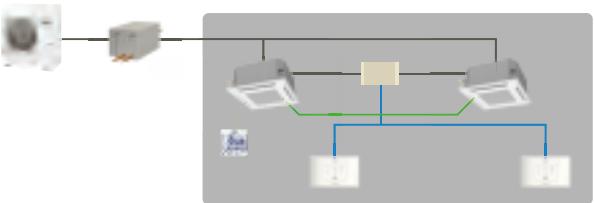

Specifications

Model name	UTY-SGZY
Dimensions (H × W × D) (mm)	80 × 130 × 35
Weight (g)	500




Optional parts list for split/Multi-split

Type	Refrigerant	Indoor unit				
		Wall-mounted				
		Designer Range		Standard Range		
		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEG07/09/12/14 KETG, KETF-B ASYG07/09/12/14 KETE, KETE-B	ASEH07/09/ 12/14KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG18/24KMTE	ASEH30/36KMTB
						
Human sensor kit						
Remote sensor unit	 The remote sensor provides additional convenience.					
Cassette grille	 UTG-UFYF-W UTG-UKYA-W UTG-UFYD-W UTG-UKYC-W UTG-UKYA-B					
Auto louver grille kit						
Silver ion filter		● UTR-FA16-5				● UTR-FA13-3
Long-life filter						
Flange						
Drain pump unit						
Wide Panel	 Indoor unit Panel 600 (mm) 600					
Panel spacer	 Panel spacer 242 mm					
Fresh air intake kit	 For Compact cassette For Circular flow cassette					
Air outlet shutter plate	 For Compact cassette For Circular flow cassette					
Insulation kit for high humidity						
Half concealed kit	 Used to half conceal a floor type indoor unit in the wall.					
L-type piping kit						



Indoor unit					
Wall-mounted				Cassette	
ECO Range				4-way flow Compact	Circular flow
ASEH05/07/09/12KNCA	ASEG07/09/12KPCE	ASEH07/09/12KLTA	ASEG18/24KLCA	AUXG 09/12/14/18/22/24 KVL A	AUXG 18/22/24/30/36/45/54 KRLB
					● UTY-SHZXC
				● UTG-UFYF-W	● UTG-UKYA-W, UTG-UKYC-W, UTG-UKYA-B
	● UTR-FA16-5			● UTD-HFAA	● UTD-HFRA
					● UTG-AKXA-W
					● UTG-BKXA-W
				● UTZ-VXAA	● UTZ-VXRA
				● UTR-YDZB	● UTR-YDZK
				● UTZ-KXGC	● UTZ-KXRA




Optional parts list for split/Multi-split

Type	Refrigerant	Indoor unit					
		Duct					Duct
		Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure	Big
		ARXG 09/12/14/18 KLLAP	ARXH 12/14/18/22/24/ 30/36/45/54 KMTAP	ARXG 12/14/18/22/24/ 30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB	
						ARYG60LHTA	ARYG72/90LHTA
Human sensor kit							
Remote sensor unit	 The remote sensor provides additional convenience.	● UTY-XSZXZ1					
Cassette grille	 UTG-UFYF-W UTG-UKYA-W UTG-UFYD-W UTG-UKYC-W UTG-UKYA-B						
Auto louver grille kit		● UTD-CXTA-W (09/12/14) UTD-CXTB-W (18)					
Silver ion filter		● UTD-HFTA (09/12/14) UTD-HFTB (18)	● UTD-HFNC (12/14/18) UTD-HFNB (22/24), UTD-HFNA(30/36/45/54)	● UTD-HFNC (12/14) UTD-HFNB (18/22/24/30) UTD-HFNA (36/45/54)	● UTD-HFND	● UTD-HFKB (45/54)	● UTD-HFKA
Long-life filter			● UTD-LFDC (12/14/18) UTD-LFDB (22/24), UTD-LFDA (30/36/45/54)	● UTD-LFNA (36/45/54) UTD-LFNB (18/22/24/30) UTD-LFNC (12/14)	● UTD-LF25NA	● UTD-LF60KA (45/54)	● UTD-LFKA
Flange					● UTD-SF045T UTD-RF204		
Drain pump unit					● UTZ-PX1NBA		● UTZ-PX1NAB
Wide Panel	 Indoor unit Panel 600 (mm) 600						
Panel spacer	 242 mm Panel spacer						
Fresh air intake kit	 For Compact cassette For Circular flow cassette						
Air outlet shutter plate	 For Compact cassette For Circular flow cassette						
Insulation kit for high humidity							
Half concealed kit	 Used to half conceal a floor type indoor unit in the wall.						
L-type piping kit							




Indoor unit				
Floor	Ceiling	Multi-split		
		4-way flow Compact cassette	Mini duct	Slim duct
AGEG09/12/14KVCA	ABEG 18/22/24/30/36/45/54 KRTA	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP
		AUYG07/09LVLA	ARYG07/09LSLAP	ARYG07/09LLTA
			● UTY-XSZXZ1	
		● UTG-UFYF-W (KVLA), UTG-UFYD-W (LVLA)		
			● UTD-GXTA-W (07/09/12/14), UTD-GXTB-W (18)	
● UTR-FA03-5		● UTD-HFAA	● UTD-HFTA (07/09/12/14) UTD-HFTB (18)	● UTD-HFTA
	● UTR-DPB24T			
		● UTZ-VXAA		
		● UTR-YDZB		
		● UTZ-KXGC		
● UTR-STA				
	● UTP-FX24A (18/22/24) UTP-FX35A (30/36/45/54)			

Optional parts list for VRF

Type	Refrigerant	Indoor unit					
		Cassette					
		One-way flow	3D flow	Compact grid type/ Standard type		Slim type	Large type
				AUXB 004/005/007/009/ 012/014/018 HLAH	AUXN 009/012/014 HLAH	Circular flow	
		AUXV 004/007/009/012/ 014/018/024 GLEH	AUXS018/024GLEH			AUXM 018/024/030 GLEH	AUXK 018/024/030/034/ 036/045/054 GLEH
Human sensor kit						UTY-SHZXC	
Remote sensor unit		UTY-XSZXZ1					
Cassette grille	      						
Auto louver grille kit							
Silver ion filter				UTD-HFAA		UTD-HFRA	
Long-life filter							
Flange							
Drain Pump Unit							
Wide Panel						UTG-AKXA-W	
Panel spacer						UTG-BKXA-W	
Fresh air intake kit*1	 			UTZ-VXAA		UTZ-VXRA	
Air outlet shutter plate:	 			UTR-YDZB		UTR-YDZK	
Insulation kit for high humidity				UTZ-KXGC		UTZ-KXRA	
Half concealed kit							
External power supply unit		UTZ-GXXA UTZ-GXXC		UTZ-GXXA UTZ-GXXC (HLAH)		UTZ-GXXA UTZ-GXXC	
Pressure sensor kit							
Gas sensor kit				UTY-SGZY+ UTY-XWZXZL (HLAH)			

C-081

Optional parts list for VRF






Type	Refrigerant	Indoor unit			
		Floor		Floor/Ceiling	Ceiling
		-	external EEV		
		AGYA 004/007/009/012/014 GCGH	AGYE 004/007/009/012/014 GCEH	ABYA 012/014/018/024 GTEH	ABYA 030/036/045/054 GTEH
Human sensor kit					
Remote sensor unit				● UTY-XSZXZ1	
Cassette grille	       				
Auto louver grille kit					
Silver ion filter		● UTR-FA03-5			
Long-life filter					
Flange					● UTD-RF204
Drain Pump Unit					● UTR-DPB24T
Wide Panel					
Panel spacer					
Fresh air intake kit*1	  For Compact cassette For Circular flow cassette				
Air outlet shutter plate:	  For Compact cassette For Circular flow cassette				
Insulation kit for high humidity					
Half concealed kit		● UTR-STA			
External power supply unit		● UTZ-GXXA UTZ-GXXC			
Pressure sensor kit					
Gas sensor kit					



Indoor unit Wall-mounted				Outdoor unit
—	external EEV	—	—	V-IV series
ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH			
ASYA 004/007/009012/014 GCGH	ASYE 004/007/009012/014 GCEH	ASYA18/24GBCH	ASYA030/034GTEH	AJY 072/090/108/126/144/162 LALDH
● UTY-XSZXZ1				
● UTR-FA16-5		● UTR-FA13-3		
● UTZ-GXXA UTZ-GXXC (HCAH)			● UTZ-GXXA UTZ-GXXC	
				● UTY-SPWX
● UTY-SGZY+ UTY-XWZXZL (HCAH)				


Function list for Split/Multi-split

External input and output function/External connect kit/communication kit

Type	Refrigerant	Indoor unit								
		Wall-mounted								
		Designer Range		Standard Range			ECO Range			
		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEG 07/09/12/14 KETF, KETF-B ASYG 07/09/12/14 KETE, KETE-B	ASEH07/09/12/14KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG 18/24KMTE	ASEH 30/36KMTB	ASEH 07/09/12 KNCA	ASEG 07/09/12 KPCE	ASEH 07/09/12 KLTA	ASEG 18/24KLCA
										
Input	Operation/Stop									
	Forced stop									
	Forced Thermostat off									
	Low noise mode operation									
	Outdoor unit operation peak control									
Output	Operation status									
	Error status									
	Compressor status									
	Indoor unit fan operation status									
	Setpoint attainment status									
	Auxiliary heater output									

*1: Included in Fresh air intake kit (UTZ-VXAA or UTZ-VXRA) *2: Functionality for installation in a server room

For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

Communication kit		External input and output PCB		
				
UTY-TWRXZ3	UTY-TWRXZ2	UTY-XCSXZ1 (wire length 280 mm)	UTY-XCSXZ2 (wire length 80 mm) for Wall-mounted type	UTY-XCSX for Duct and Cassette types



Cassette		Duct			Duct			
Compact 4-way flow Range	Circular flow Range	Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure		Big
AUXG 09/12/14/ 18/22/24 KVLA	AUXG 18/22/24/30/ 36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXH 12/14/18/22/24/ 30/36/45/54 KMTAP	ARXG 12/14/18/22/24/ 30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB		
							ARYG60LHTA	ARYG72/90LHTA
	● PCB Terminal or ○ UTY-XCSX+UTZ-GXRA	● PCB Terminal	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXDA	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXNA	● PCB Terminal	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● PCB Terminal or ○ UTY-XCSX
	● PCB Terminal				● PCB Terminal		● UTD-ECS5A	● PCB Terminal
	●○ UTY-XCSX+UTZ-GXRA		●○ UTY-XCSX+ UTZ-GXDA	●○ UTY-XCSX+ UTZ-GXNA	●○ UTY-XCSX+ UTZ-GXNA	● UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● UTY-XCSX
	● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	○ UTD-ECS5A	● UTY-XWZXZG or UTY-XCSX
	● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA		● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA		● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA		
	● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● UTY-XWZXZG or UTY-XCSX
	● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● UTY-XWZXZG or UTY-XCSX

●: Dry Contact ○: Apply Voltage

External input and output PCB box



UTZ-GXDA
(for Duct)

UTZ-GXRA
(for Cassette)

UTZ-GXEA
(for Ceiling)

External input and output PCB bracket



UTZ-GXNA

Function list for Split/Multi-split

External input and output function/External connect kit/communication kit

Type	Refrigerant	Indoor unit		Multi-split			
		Floor	Ceiling	Wall-mounted	Mini duct	Slim duct	
		AGEG09/12/14KVCA	ABEG 18/22/24/30/ 36/45/54 KRTA	ASEG22KMTE	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP	
					ARYG07/09LSLAP		ARYG07/09LLTA
Input	Operation/Stop	● UTY-XWZXZ5	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5	● PCB Terminal	● UTD-ECS5A	
	Forced stop	● UTY-XWZXZ5	● PCB Terminal	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5	● PCB Terminal	● UTD-ECS5A	
	Forced Thermostat off	● UTY-XWZXZ5	● UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5			
	Low noise mode operation						
	Outdoor unit operation peak control						
Output	Operation status	● UTY-XWZXZ5	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5	● UTY-XWZXZG	● UTD-ECS5A	
	Error status	● UTY-XWZXZ5	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5			
	Compressor status						
	Indoor unit fan operation status	● UTY-XWZXZ5	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5	● UTY-XWZXZG	● UTD-ECS5A	
	Setpoint attainment status						
	Auxiliary heater output		● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA		● UTY-XWZXZG		

*1: Included in Fresh air intake kit (UTZ-VXAA or UTZ-VXRA) *2: Functionality for installation in a server room


Communication system

External connect kit

For indoor unit



UTY-XWZX



UTY-XWZXZ5



UTY-XWZXZG

For outdoor unit



UTY-XWZXZ2



UTY-XWZXZ3




Outdoor unit						
Compact cassette	Single Split			Simultaneous multi-split		
AUXG07KVLA	AOEG30/36/45/54KBTB, AOEG36/45/54KRTA			AOEG36/45/54KBTB, AOEG36/45/54KRTA		
AUYG07/09LVLA		AOYG36/45/54/60LATT	AOYG45/54LBTA, AOYG72/90LRLA		AOYG36/45LBTB	AOYG36/45/54LATT
● PCB Terminal						
● PCB Terminal						
	● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3		○ UTY-XWZXZ2	
	● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3		○ UTY-XWZXZ2	
● UTY-XWZXZG						
	● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3			○ UTY-XWZXZ2
	● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3			○ UTY-XWZXZ2
● UTY-XWZXZG						

●: Dry Contact ○: Apply Voltage

External control set

For indoor unit



UTD-ECS5A

Function list for VRF

External input and output function/External connect kit

Type		Refrigerant	Indoor unit					
			Cassette					
			One-way flow	3D flow	Compact grid type/ Standard type		Slim type	Large type
					High Efficiency	Circular flow		
					AUXB 004/005/007/ 009/012/014/ 018HLAH	AUXN 009/012/014 HLAH		
			AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH		AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH
Input	Operation/Stop		● UTY-XWZXZD ○ UTY-XWZXZB					
	All On/All Off							
	Group stop							
	Forced stop		● UTY-XWZXZD ○ UTY-XWZXZB					
	Emergency stop		● UTY-XWZXZD ○ UTY-XWZXZB					
	Forced thermostat off		● UTY-XWZXZE ○ UTY-XWZXZ7					
	Low noise mode operation							
	Cooling/Heating priority							
	Outdoor unit operation peak control							
	Power usage information from electricity meter							
Output	Operation status		● UTY-XWZXZC					
	Error status		● UTY-XWZXZC					
	Indoor unit fan operation status		● UTY-XWZXZC					
	Auxiliary heater output							
	Base pan heater							
Other	Expansion kit				●UTZ-JXXA (HLAH)			

*2: The Touch panel controller has the functions of dry contact and voltage application, but the external connection kit described above is not necessary because the touch panel controller has an external input terminal block.

For VRF

Expansion kit	Connection Cable
	
UTZ-JXXA	UTY-XWZXZL



Indoor unit									
Duct						Floor		Floor/Ceiling	
Low static pressure		Low static pressure	Medium static pressure	High static pressure	-	EEV external			
Mini (With drain pump)	Slim (With drain pump)						High Efficiency		
	ARXD 004/005/007/ 009/012/014/ 018/024 HLAH	ARXP 009/012/014 HLAH							
ARXK 004/007/009/ 012/014/018/ 024GLGH	ARXD 007/009/012/ 014/018/024 GLEH, ARXD04GALH		ARXP 018/030 GLFH	ARXA 024/030/ 036/045 GLEH	ARXC 036/045/060 072/090/096 GTEH	AGYA 004/007/ 009/012/014 GCGH	AGYE 004/007/ 009/012/014 GCEH	ABYA 012/014/018/ 024GTEH	ABYA 030/036/045/ 054GTEH
● UTY-XWZXZD ○ UTY-XWZXZB								● UTY-XWZXZD ○ UTY-XWZXZB	
● UTY-XWZXZD ○ UTY-XWZXZB								● UTY-XWZXZD ○ UTY-XWZXZB	
● UTY-XWZXZD ○ UTY-XWZXZB								● UTY-XWZXZD ○ UTY-XWZXZB	
● UTY-XWZXZE ○ UTY-XWZXZ7								● UTY-XWZXZE ○ UTY-XWZXZ7	
● UTY-XWZXZC								● UTY-XWZXZC	
● UTY-XWZXZC								● UTY-XWZXZC	
● UTY-XWZXZC								● UTY-XWZXZC	
	● UTY-XWZXZC								
	●UTZ-JXXA (HLAH)								

●: Dry Contact ○: Apply Voltage

Function list for VRF

External input and output function/External connect kit

Type	Refrigerant	Indoor unit			
		Wall-mounted			
		-	EEV external	-	-
		ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH		
		ASYA 004/007/009012/014 GCGH	ASYE 004/007/009012/014 GCEH	ASYA18/24GBCH	ASYA030/034GTEH
Input	Operation/Stop	● UTY-XWZXZD ○ UTY-XWZXZB			
	All On/All Off				
	Group stop				
	Forced stop	● UTY-XWZXZD ○ UTY-XWZXZB			
	Emergency stop	● UTY-XWZXZD ○ UTY-XWZXZB			
	Forced thermostat off	● UTY-XWZXZE ○ UTY-XWZXZ7			
	Low noise mode operation				
	Cooling/Heating priority				
	Outdoor unit operation peak control				
	Power usage information from electricity meter				
Output	Operation status	● UTY-XWZXZC			
	Error status	● UTY-XWZXZC			
	Indoor unit fan operation status	● UTY-XWZXZC			
	Auxiliary heater output				
	Base pan heater				
Other	Expansion kit	● UTZ-JXXA (HCAH)			

*2: The Touch panel controller has the functions of dry contact and voltage application, but the external connection kit described above is not necessary because the touch panel controller has an external input terminal block.

Communication system

External connect kit

For indoor unit

UTY-XWZXZ7 

UTY-XWZXZD 

UTY-XWZXZB 

UTY-XWZXZE 

UTY-XWZXZC 

For outdoor unit

UTY-XWZXZ6 

UTY-XWZXZ9 

UTY-XWZXZF 



Outdoor unit						controller	Other
J-VS	J-IVL	J-IV	J-IVS	V-IV	VR-IV	Central remote controller	RB unit
AJY 040/045/054 KCTAH							
	AJY 072/090/108/ 126/144/162 LELDH	AJY 040/045/054 LBLDH, AJY 040/045/054 LELDH	AJY 040/045/054 LCLDH	AJY 072/090/108/ 126/144/162 LALDH	AJY 072/090/108/ 126/144 GALDH	UTY-DCGYZ3	UTP-RX01AH UTP-RX01BH UTP-RX01CH UTP-RX04BH UTP-RX08AH UTP-RX12AH
						●UTY-XWZXZ7 ○UTY-XWZXZ8	
	● UTY-XWZXZ6						
	● UTY-XWZXZ6					●UTY-XWZXZ7 ○UTY-XWZXZ8	
	● UTY-XWZXZ6						
	● UTY-XWZXZ6						●UTY-XWZXZ6 ○UTY-XWZXZB
	● UTY-XWZXZ6						
	● UTY-XWZXZF						
	○ UTY-XWZXZ6					○UTY-XWZXZA	
	○ UTY-XWZXZ6					○UTY-XWZXZA	
	● UTY-XWZXZ9			● UTY-XWZXZ9			

●: Dry Contact ○: Apply Voltage

For RB unit

UTY-XWZXZ6 

UTY-XWZXZB 

Central remote controller

UTY-XWZXZ7 

UTY-XWZXZ8 

UTY-XWZXZA 

For Touch panel controller

UTY-XWZXZA 

Separation tube




For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

Separation tube

UTP-SX236A / UTP-SX254A
For 3-phase simultaneous
multi-split

UTP-SX272A
For Simultaneous multi-split
Twin / Triple / Double Twin



UTP-SX354A
For 3-phase simultaneous
multi-split

UTP-SX372A
For Simultaneous multi-split
Twin / Triple / Double Twin



for VRF

Separation tube

UTP-AX054A

Gas pipe



Liquid pipe



UTP-AX090A

Gas pipe



Liquid pipe



UTP-AX180A

Gas pipe



Liquid pipe



UTP-AX567A

Gas pipe



Liquid pipe



UTP-BX090A

Suction
Gas pipe



Discharge
Gas pipe



Liquid pipe



UTP-BX180A

Suction
Gas pipe



Discharge
Gas pipe



Liquid pipe



UTP-BX567A

Suction
Gas pipe



Discharge
Gas pipe



Liquid pipe



UTP-LX180A
For DX kit



Header

UTR-H0906L / UTR-H1806L

Gas pipe



Liquid pipe



UTR-H0908L / UTR-H1808L

Gas pipe



Liquid pipe



UTP-J0906A / UTP-J1806A

Suction
gas pipe



Discharge
gas pipe



Liquid pipe



UTP-J0908A / UTP-J1808A

Suction
gas pipe



Discharge
gas pipe



Liquid pipe



Outdoor unit branch kit

UTP-CX567A

Gas Pipe



Liquid Pipe



UTP-DX567A

Suction Gas Pipe



Discharge Gas Pipe




Liquid Pipe




Separation tube for RB unit

UTP-EX060A

Gas Pipe




Liquid Pipe




UTP-EX096A

Gas Pipe



Liquid Pipe





for VRF

EV kit		Shut off valve kit	
Model name $\leq$ 09: UTR-EV09XB Model name $\geq$ 12: UTR-EV14XB for compact wall-mounted type	Model name $\leq$ 09: UTR-EV09XC Model name $\geq$ 12: UTR-EV14XC for R32 VRF wall-mounted type	UTP-GX027A for R32 VRF indoor unit	UTP-GX060A for R32 VRF outdoor unit
			

RB unit			
UTP-RX01AH / UTP-RX01BH / UTP-RX01CH Single type	UTP-RX04BH Multi-split type	UTP-RX08AH Multi-split type	UTP-RX12AH Multi-split type
			

Specifications

Separation tube

Model name	UTP-AX054A	UTP-AX090A	UTP-AX180A	UTP-AX567A
Total cooling capacity of indoor unit (kW)	19.6 or less	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Header

Model name	3-6 Branches	UTR-H0906L	UTR-H1806L
	3-8 Branches	UTR-H0908L	UTR-H1808L
Total cooling capacity of indoor unit (kW)		28.0 or less	28.1 to 56.0
Model name	3-6 Branches	UTP-J0906A	UTP-J1806A
	3-8 Branches	UTP-J0908A	UTP-J1808A
Total cooling capacity of indoor unit (kW)		28.0 or less	28.1 to 56.0

Outdoor unit branch kit

Model name	UTP-CX567A (for V-IV)	UTP-DX567A (for VR-IV)
Number of outdoor units	2 outdoor units	1
	3 outdoor units	2

EV kit

Model name	UTR-EV09XB	UTR-EV14XB	UTR-EV09XC	UTR-EV14XC
Application model	ASYE004GCEH ASYE007GCEH ASYE009GCEH	AGYE004GCEH AGYE007GCEH AGYE009GCEH	ASYE012GCEH AGYE014GCEH	ASYE004HCAH ASYE005HCAH ASYE007HCAH ASYE009HCAH


RB unit

Type	Single type			Multi-split type		
Model name	UTP-RX01AH	UTP-RX01BH	UTP-RX01CH	UTP-RX04BH	UTP-RX08AH	UTP-RX12AH
Power source	230/1/50					
Input power	W	17	24	31	96	136
Number of branches	1	1	1	4	8	12
Maximum capacity of connectable indoor units (Q)	kW	$Q \leq 8.0$	$Q \leq 18.0$	$Q \leq 28.0$	$Q \leq 56.1^{*1}$	$Q \leq 72.0$
Maximum capacity of connectable indoor units per branch (Q)	kW	$Q \leq 8.0$	$Q \leq 18.0$	$Q \leq 28.0$	$Q \leq 18.0$	$Q \leq 8.0$
Maximum Connectable Indoor Units per Branch		3	8	8	8	7
Dimensions (H × W × D)	mm	198 × 298 × 268			260 × 658 × 428	298 × 660 × 618

*1: When two RB units are connected in series (8 branches in total), the maximum capacity of the connectable indoor units is up to 56.0 kW.


Shut off valve kit

Model name	UTP-GX027A	UTP-GX060A
Power source	230/1/50	230/1/50
Input power	W	24
Number of branches	1	1
Maximum number of connectable Expansion kit	kW	4
Maximum capacity of connectable indoor units (Q)	kW	$Q \leq 8.0$
Maximum capacity of Connectable Indoor Units per Branch (Q)	kW	$Q \leq 8.0$
Dimensions (H × W × D)	mm	250 × 540 × 267

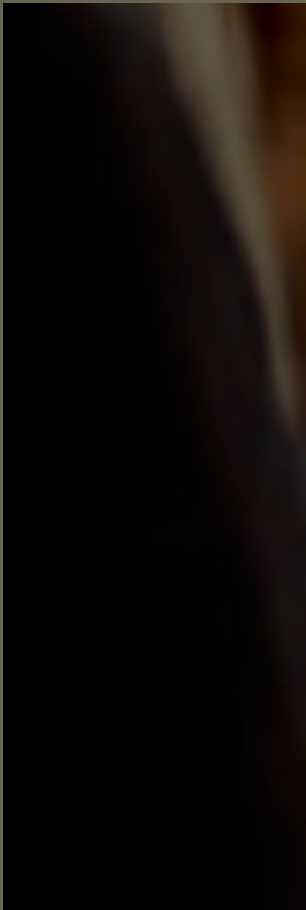

SUPPORT

- Sp-002 VRF Support
- Sp-004 HVAC System Design Support Tool
- Sp-006 Quick Service & Maintenance
- Sp-008 AIRSTAGE Service Monitor Tool
- Sp-010 Service Tool
- Sp-011 Web Monitoring Tool

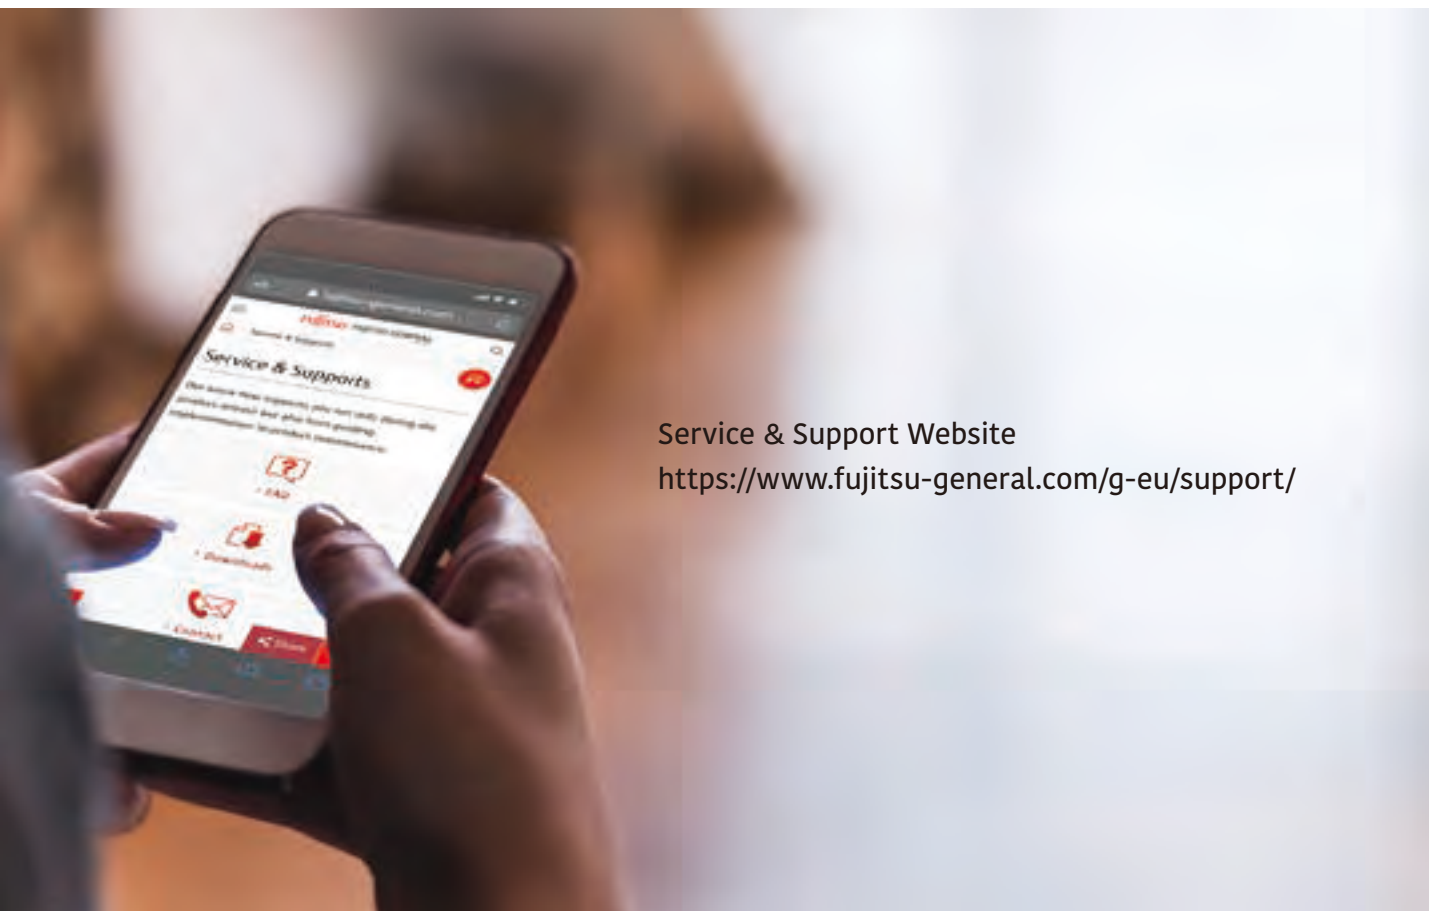

Service & Support Website
<https://www.fujitsu-general.com/g-eu/support/>

Our knowledgeable sales and service representatives assist you, from product selection to installation and maintenance.

Category	Information material											Tool				
	Product sales training material	Product technical training material	Product news	Brochures	Promotional movies	Operation manuals	Design & Technical manuals	Certification data	2D CAD data	3D CAD (Revit) data	Installation manuals	Service manual	Design simulator (Room air conditioner, Packaged air conditioner, and VRF)	CFD simulation	Service tool and Web monitoring tool	Mobile technician
	●	●														
Product training	●	●														
Product information seeking			●	●	●	●	●									
Technical information seeking							●	●								
Model selection							●						●			
Design							●		●	●			●			
Verification														●		
Installation							●				●					
After-sales service												●			●	●

VRF Support

Fujitsu General provides engineers and consultants with a wide range of product and technical information. In addition, we conduct research on new products and support design activities. We provide a wide range of support services from design to installation to maintain high quality.

Technical information

We provide equipment selection software that facilitates the design of air conditioning systems by providing performance data for the units and estimation for model selection.

Features

- Design & Technical manual
- Model selection & estimation
- Certification data
- 2D/3D CAD data



2D/3D CAD data

Product information

Information on new models is provided in the form of documents and movies in a timely manner for release, readily downloadable from the private section of our website. Contact your Fujitsu General representative for access information.

Features

- Product news
- Brochures & manuals
- Promotional movies



<https://www.fujitsu-general.com/eu/support/downloads/vrf/>




Technical support

Technical support is offered at every stage, from design through to installation, to assist in optimizing air conditioning solutions.

Features

- CFD simulation
- Guidelines
- Commissioning support

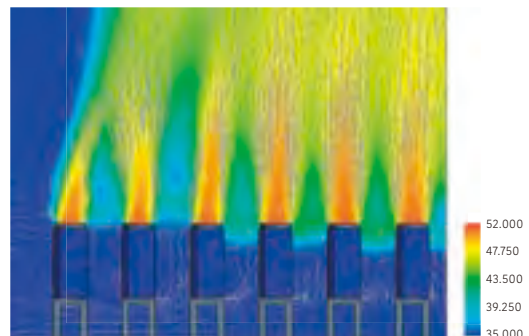

CFD simulation



Commissioning support

Training Facilities



Fujitsu General regularly provides professional product, technical and service training at its training facilities worldwide. These research facilities also support the development of human resources with advanced technical skills.

Features

- Designing VRF systems
- On-site training for control systems

- 1 Head office training center in Japan
- 2 Training center in China
- 3 Asia training center in Singapore
- 4 Europe training center in the United Kingdom
- 5 Europe training center in Germany
- 6 America training center in the United States
- 7 Middle East training center in the UAE
- 8 Oceania training center in Australia


HVAC System Design Support Tool

Put the charts and pens away and design your projects on a computer using the Design simulator. Everything from selecting indoor and outdoor units, allocating controls and optional parts through to designing the piping and wiring systems is made easier using the program's built-in features.

Once the project design is complete, the Export function makes it easy to generate material lists, product specifications, and refrigerant calculations, and more. You can also export in Word, Excel, and Acrobat formats, as well as group CAD data related to your project.



Design simulator

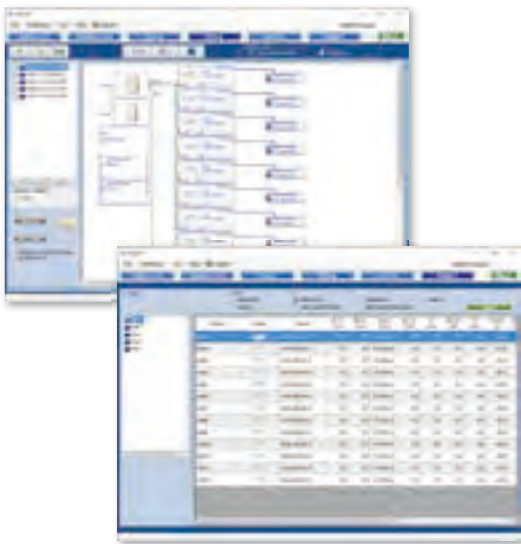

Automatically create model selection information


- The required performance, type, and temperature conditions for each indoor unit are entered and then dragged and dropped onto the outdoor unit to automatically set each unit.
- Creates piping and wiring diagrams automatically to facilitate branching, grouping, and option settings.
- The additional refrigerant charging is automatically calculated when the pipe length is entered.
- Easy configuration of remote controller groups, central controller, and converters.
- The equipment list including the equipment information is created automatically.



Outputs in the format that matches the application

You can export your project information in a number of industry standard file formats.

- Word format (rtf) (doc)
- Excel format (csv)
- Acrobat format (pdf)
- 2D CAD data (DXF)

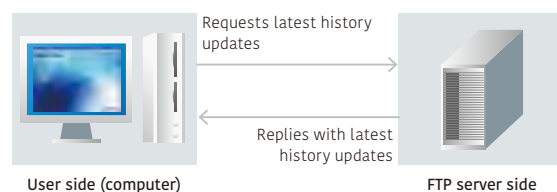

Update your Design simulator

The database can be updated easily online with the AutoUpdate function using FTP.



BIM

Building information modeling



BIM files of Fujitsu General's products are available on BIMObject®

Fujitsu General is releasing BIM files of our products on the BIMObject® website BIMObject.com.

Outline of BIMObject®

BIMObject® is a game changer for the construction industry, offering development, maintenance, and syndication of objects on the world's largest BIM platform.

About BIM files

- BIM files can be viewed in Autodesk Revit® 2018 version or later.
- In each BIM file, the location of the connectors for the refrigerant and drain pipe is different.
- Each BIM file includes several family types.
- A catalog and specification sheet is available in Revit file format for each product.



RFA (Revit data)

A data format available for BIM-designed projects

Data content

- Shape (Size)
- Drain direction
- Pipe direction
- Power supply location
- It contains information about the above specifications.



Type catalog with product specifications



DWG

a standard data format used for Autodesk products



DXF

Intermediate data commonly available in CAD products

Data content

- Shape (Size)



* To learn more about how to use BIM files, refer to the instructional video on each product page. youtu.be/wfL-hwFQ7dM

Quick Service & Maintenance

In the unlikely event that a problem should occur with the unit or system, a wide variety of support tools are available to assist with prompt service and maintenance anytime, anywhere, including error code displays on the product, service tools to check the detailed status of the entire system, and remote monitoring tools using the internet.



Easy maintenance & monitoring

Designed for easy maintenance

The operating status of the air conditioner and detailed trouble conditions are displayed on the 7-segment indicator lamp on the outdoor unit printed circuit board (PCB) and on the screen of the remote controller.

Check the status of the unit quickly for a prompt response.


- Display the operation mode at the time.
- Discharge temperature and pressure
- Compressor operation status
- "Address/Type/Number" of the outdoor unit
- Error code

7-segment indicator lamp



Wired remote controller (with touch panel)

Error status/Error history




System number
001: Controller
002: Indoor unit
Error code
Unit number

Error diagnosis by Service tool

Connect Service tool to check the status details of units, from single split to VRF, on a computer screen. Check the errors quickly for prompt countermeasures.


- Operating status/control
- Monitoring operating conditions
- Monitoring sensor data
- Indicating trend graphs
- Error history
- Indicating refrigerant circuit diagrams (for VRF)

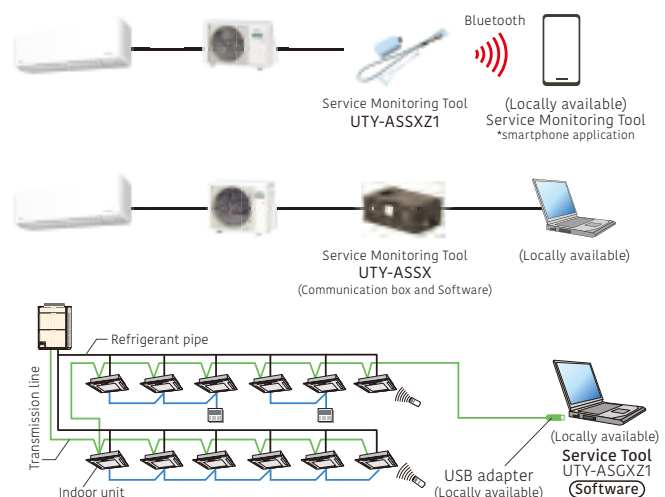

Remote monitoring

VRF system operating status and trouble status details can be monitored remotely at any time via the internet.

Prompt coordination is available with service personnel.

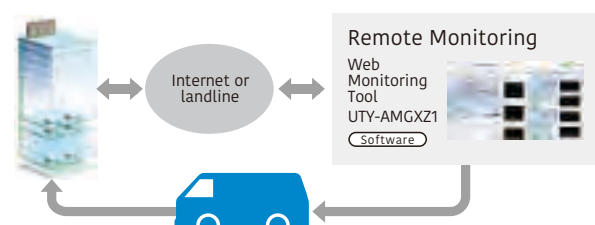




Mobile Troubleshooting App for iOS and Android™ Devices

We will release an App for troubleshooting tools for iPhone, iPod touch and other Apple devices, and Android products for Fujitsu General air conditioners (Room air conditioner/Packaged air conditioners VRF and ATW, “AIRSTAGE Mobile”, and R32 calculation of allowable refrigerant capacity)

Use Error Code Check, Troubleshooting, and Sensor Check to understand the status of your air conditioner.



Mobile Technician **FREE**

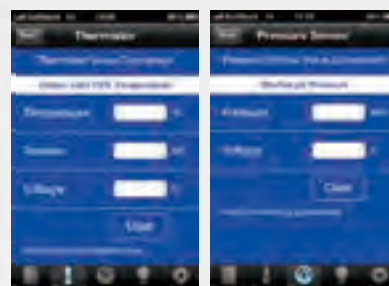

Service Monitoring Tool for Single split, Multi-split & Air to water



- A quick overview of the temperature sensor readings and the electronic expansion valves (EEVs), fans, compressors and other control components
- It is not always easy to read the temperature sensor and know the status of the control components. So let the Service monitoring tool judge them.
- Visualizes protected operations
- Troubleshoots intermittent problems effectively
- Provides proof of normal operation to customers during periodical maintenance



Actual operating conditions



Graphs



Operational histories

	UTY-ASSX
Dimensions (H x W x D) (mm)	60 × 160 × 160
Weight (g)	500

AIRSTAGE Service Monitor Tool for Single-split, Multi-split, Air to water

UTY-ASSXZ1


Improved work efficiency

AIRSTAGE Service Monitor Tool can diagnose the cause of the error for a wide range of products. It makes maintenance or service support faster and can also reduce the number of visits and maintenance costs.

*The values in the pictures are examples.

Bluetooth communication

AIRSTAGE Service Monitor Tool can diagnose by the smart device*¹ and reduce the working time compared with diagnosis by PC. No need to connect a PC makes diagnosis easier even in narrow spaces.

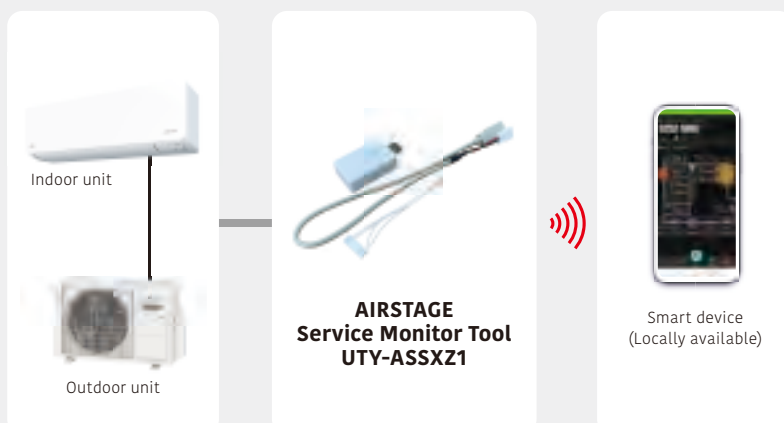

You need to install the "AIRSTAGE Service Monitor Tool" app on your smart device.

Compact and lightweight design

New model is easy to carry by compact and lightweight design. The service personnel can visit the maintenance site with small luggage.



New application with simple design


New application for smart devices has been released. The stylish design makes the application easy to use for everyone.



AIRSTAGE Service Monitor Tool



Now available !



Refrigerant cycle diagram display

The operating status can be displayed with a simple, clear diagram*2 on the smart device. It reduces the time for diagnosis and makes diagnosis easier.

It can complement abundant experience and advanced knowledge of refrigerant cycle. This shortens the training time for service personnel.

*2 list and graph displays are also available



*The values in the pictures are examples.

Specifications

	UTY-ASSXZ1
Dimensions (H x W x D) (mm)	20 x 35 x 60 (adapter)
Communication cable (cm)	60
Weight (g)	25 (adapter)
Communication method	Bluetooth 5.3
Max. communication distance (m)	10*3
Compatible device	Android8.0, iOS17 or later

*3 Depends on the environment

Function List

		UTY-ASSXZ1	UTY-ASSX
			
Product specification	Installation	Outdoor unit PCB	Outdoor unit PCB
	Communication	Bluetooth	Wired
Support product type	Split	●	●
	Multi-split	●	●
	ATW	●	●
	VRF	—	—
Function	Product distinction	●	●
	Signal-type distinction	●	●
	Operating status display	List	●
		Graph	●
		Refrigerant cycle diagram	—
		New Operating history records	—
	Adapter firmware update	●	—
	Adapter status monitoring	●	—
	Input and output of history data	●	●

Service Tool

UTY-ASGXZ1

Extensive monitoring and analysis functions that make installation and maintenance easier

- The operation status of the system can be monitored and analyzed to detect any malfunctions.
- Data on the operation status of the system can be stored on a computer to allow for remote access.
- Up to 400 indoor units in a single VRF network system can be controlled and monitored for a large building or hotel.
- This software can be connected to any point of transmission line with a USB adapter (locally available).

* Saved data can be displayed offline. Note that the data saved by the following software applications cannot be displayed.

- UTR-YSTB/UTR-YSTC (Service tool)
- UTR-YMSA (Web monitoring tool)

Automatic operation check for refrigeration cycles

Once installed, the Service tool automatically checks for refrigeration cycles. The self-diagnosis function determines whether each sensor value is normal, which reduces the need for manual checks. The result of a diagnosis can be provided in a report.



Use the result of a self-diagnosis only as a guide and use your own judgment to make a final decision.


These sensor values are checked automatically:

- ✓ the discharge temperature is normal, "OK"
 - ✓ the super heat volume is normal, "OK"
 - ✓ the high pressure pipe value is normal, "OK"
 - ✓ the low pressure pipe value is normal, "OK"
- And the values for other items will also be diagnosed.




Remote technical support and maintenance

On-site check screen can be shared between on-site staff and a service technician in a remote location. When a service technician visits the site for troubleshooting, the system's operation status can be shared in real time with a remote service center for assistance. On-site staff can have an online chat with a remote service center to get further assistance.

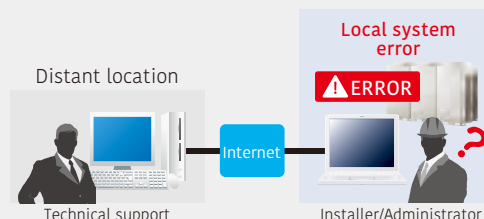

Trend charts

Previous-generation application could display only 3 sets of data from sensors. However, the current generation of the service tool displays multiple charts simultaneously so that refrigeration cycles can be monitored and checked in greater detail.

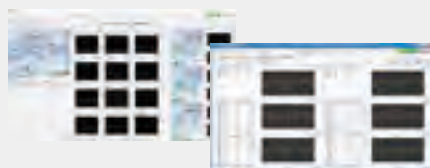

Computer requirements

	UTY-ASGXZ1
Operating system	• Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Pro (64-bit)
CPU	Intel® Core™ processor 1 GHz or higher
Memory	4 GB or more
HDD	40 GB or more of free space
Screen resolution	1,366 × 768 or higher resolution
Interface	• 2 USB ports – 1 USB port is required for WHITE-USB-KEY connection – 1 USB port is required for Echelon U10 USB/U60-FT DIN Network Interface
Software	Adobe Reader 9.0 or later
Internet transmission rate (in remote access)	Internet environment capable for communication speed of 3 Mbps or more (for uploading) all the time (including when accessing to oversea website)

- Transmission adapter (Required for each VRF network):
 - Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)
 - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

Packing list

Name	Quantity	Application
White-USB-key (Software protection key)	1	Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey.

- Computer requirements
- Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)

Web Monitoring Tool


UTY-AMGXZ1

Features

- Troubleshooting is performed by monitoring each air conditioning unit remotely during a periodical system check.
- An error notification is automatically transmitted to several locations via the internet*1.
- Requires either a dedicated internet connection or landline to operate.
- The occurrence of an error can be confirmed through an error alert and equipment status information obtained from a remote location.
- Monitoring data can be downloaded in a remote location. These data can be accessed and displayed even when the service tool is in offline mode.
- Can be viewed on the monitoring computer's Web browser without installing any special software.


*1: Internet e-mail access required.

Web Monitoring System

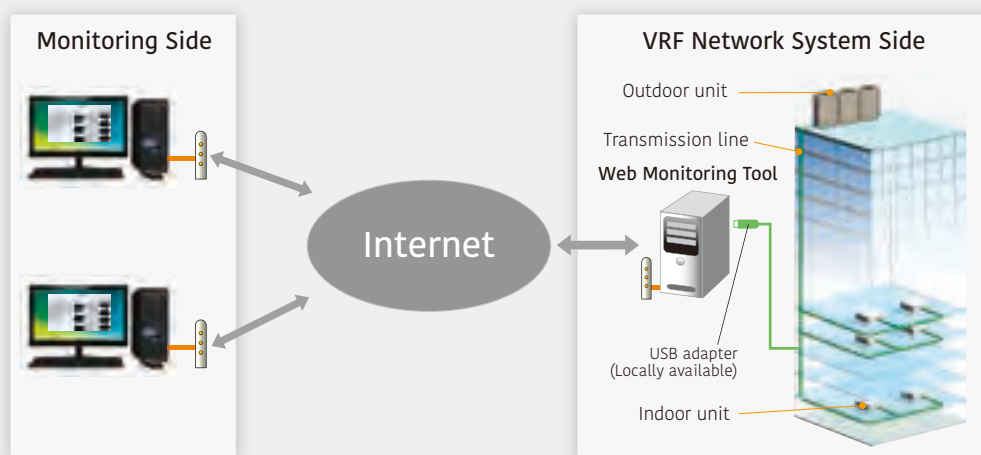

Supporting up to 4 VRF network systems

Up to 4 USB adapters can be connected to a computer, enabling the monitoring of up to 1,600 indoor units. Suitable for use in a large building or hotel.

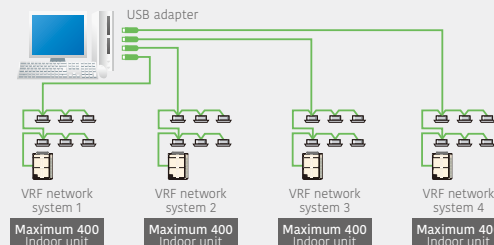

Computer requirements

	UTY-AMGXZ1
Operating system	• Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Pro (64-bit)
CPU	Intel® Core™ processor 1 GHz or higher
Memory	4 GB or more
HDD	40 GB or more of free space
Screen resolution	1,366 × 768 or higher resolution
Interface	• USB port (for Echelon U10 USB/U60-FT DIN Network Interface, Max. 4, software protection key) • Either of the following interface is required for remote connection: – Internet using LAN: Ethernet port is required.
Software	Adobe Reader 9.0 or later
Internet transmission rate (in remote access)	Internet environment capable for communication speed of 3 Mbps or more (for uploading) all the time (including when accessing to overseas website)

- Transmission adapter (Required for each VRF network):
 - Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)
 - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

Packing list

Name	Quantity	Application
White-USB-key (Software protection key)	1	Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey.

- Computer requirements
- Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)



Notice regarding specifications

I.U. = Indoor Unit O.U. = Outdoor Unit Qu = Quiet * = Not decided yet

- Specifications and design are subject to change without notice for future improvement.
- For further details, check with our authorized dealers.
- Cooling and heating capacities are based on the following conditions:

Cooling	Indoor temp. : 27°C DB/19°C WB Outdoor temp. : 35°C DB/24°C WB
Heating	Indoor temp. : 20°C DB Outdoor temp. : 7°C DB/6°C WB

- Performance tests are conducted in accordance with EN14511.
- Seasonal efficiency tests are conducted in accordance with EN14825.
- Sound power tests are conducted in accordance with EN12102.




Fujitsu General (Thailand) Co., Ltd.



ISO 9001 Certification number: 01 100 075229
ISO 14001 Certification number: 01 104 9245

Fujitsu General (Shanghai) Co., Ltd.



ISO 9001 Certification number: 01 100 79269
ISO 14001 Certification number: CNBJ312244-UK

Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.



ISO 9001 Certification number: 15917Q20073R5M
ISO 14001 Certification number: 15918E20021R5M

- The products and equipment listed in this catalog contain fluorinated greenhouse gases.
- “AIRSTAGE” is a worldwide trademark of Fujitsu General Limited, and a registered trademark in Japan and other countries and regions.
- iPhone and iPod touch are trademarks of Apple Inc., registered in the United States and other countries.
- “Microsoft,” “Windows,” and “DirectX” are trademarks of Microsoft Corporation in the United States and other countries.
- “Intesis” is a registered trademark of HMS Industrial Networks in the European Union and is trademarked in the rest of the world.
- “BACnet” is a trademark and registered trademark of the American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.
- “MODBUS” is a registered trademark of Schneider Electric.
- “LONWORKS” and “Echelon” are trademarks of Echelon Corporation registered in the United States and other countries.
- “Adobe” and “Adobe Reader” are either registered trademarks or trademarks of Adobe in the United States and/or other countries.
- “Android” is a trademark of Google LLC.
- Other company and product names mentioned in this document may be the registered trademarks, trademarks or trade names of their respective owners.
- “Bluetooth” is a registered trademark of Bluetooth SIG, Inc.
- Intel and Intel Core are trademarks of Intel Corporation in the U.S. and/or other countries.

Distributed by:

FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki, Kanagawa, 213-8502, Japan
www.fujitsu-general.com



Copyright© 2008-2025 Fujitsu General Limited. All rights reserved. 3EF041-2501E